

# INSTALLATION MANUAL

## 62022AM

**LED**  
BUILT IN



80  
CRI



CE EAC UK CA

RoHS  
COMPLIANT




NOT  
DIMMABLE

230V | SMD2835 | 20W | IP20 | Sensor 30min timer | PC  
Complete with 450mA driver.




**one**  
LIGHT

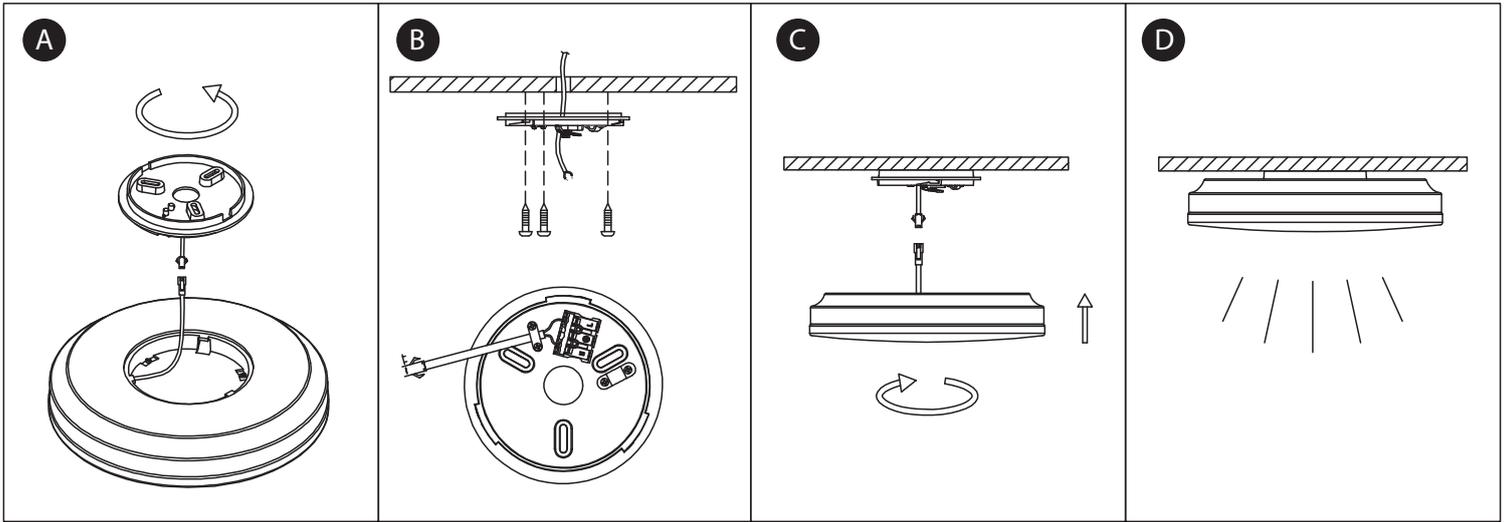


### MICROWAVE MOTION SENSOR

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

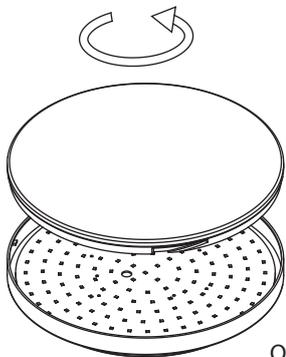

Open the cover to adjust the microwave setting.



	1	2	
ON	ON	ON	100%
ON	-	-	75%
-	ON	-	50%
-	-	-	25%

#### DETECTION SENSITIVITY

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

	3	4	5	
ON	ON	ON	ON	5 s
ON	ON	ON	-	30 sec
ON	-	ON	ON	1 min
ON	-	-	ON	3 min
-	ON	ON	ON	5min
-	ON	-	ON	10 min
-	-	ON	ON	20 min
-	-	-	ON	30 min

#### ON TIMER

Refers to the time period the lamp remains at 100% illumination after no motion detected.

	6	7	8	
ON	ON	ON	ON	2LUX
ON	ON	ON	-	10LUX
-	ON	-	-	25LUX
ON	-	-	-	50LUX
-	-	-	-	Disable

#### DAYLIGHT SENSOR

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold. When set to disable mode, the daylight sensor will be unavailable and the light will not light up until motion was detected.

### Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.