

INSTALLATION MANUAL

6312DC & 6312LC

LED
BUILT IN



DIMMABLE
CCT V

CE EAC UK CA
RoHS
COMPLIANT



DC 25W
MOTOR

6
SPEED



LIGHT
ON/OFF
SWITCH

22W
LED
2000
LUMEN


230V | LED 22W | DC MOTOR 25W | IP20 | Metal body | Wood blades | Ceiling mounted

- Maximum air flow rate 85m³/min
- Service value 3,4/W
- Standby power consumption 0,5W


- Fan sound power level 45dB(A)
- Maximum air velocity 2,3 m/sec.
- Max RPM 185

230V | 85 CRI

270mm




1

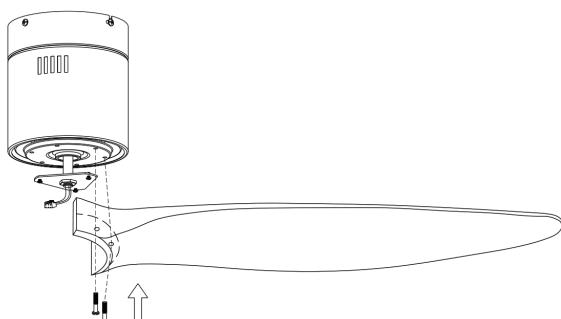


Install the fan blades and tighten screws.

2




Install LED plate and connect cable.

3

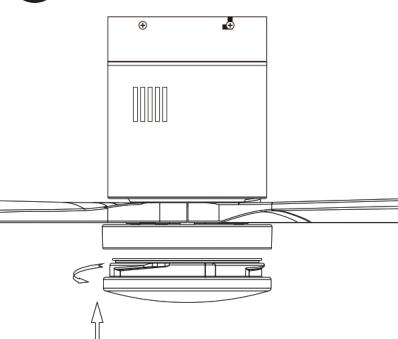


Install the diffuser onto the LED plate.

4




Install ceiling bracket.


4a



5

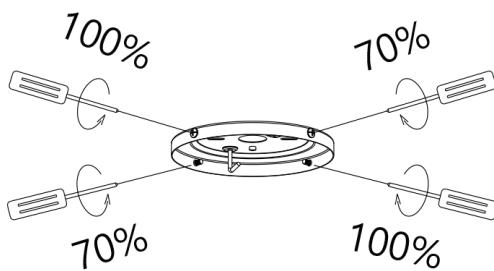


6

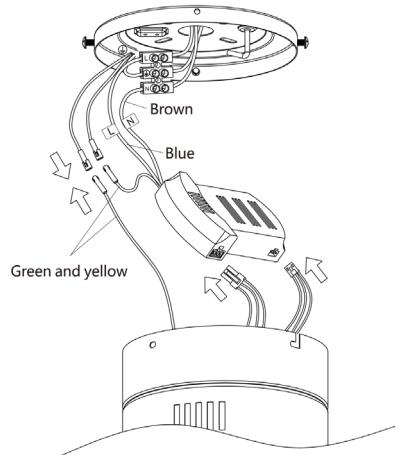


Connect wires.

7

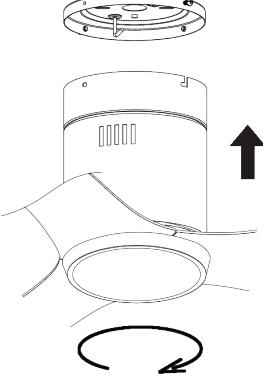

8

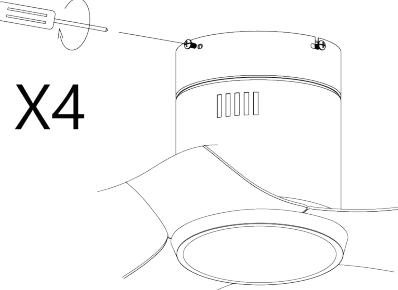


Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.

INSTALLATION MANUAL

6312DC & 6312LC


9

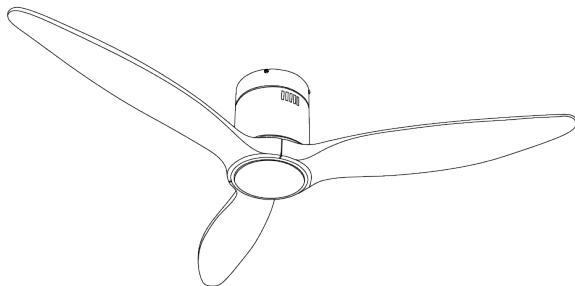

REMOTE CONTROL


Requires 2xAAA batteries. Remove batteries if not used for long period of time.

- 1 LED indicator
- 2 ON/OFF
- 3 Mute sound
- 4 Warm white LED
- 5 Cool white LED
- 6 Daylight LED
- 7 Fan OFF
- 8 Fan speeds: To turn fan ON 1(lowest) to 6 (highest)
- 9 LED light ON / OFF
- 10 LED dimmer
- 11 Breeze: Fan speeds automatic cycle between 1 to 6
- 12 Vacation mode: Switch on the light kit
5 minutes each 2 hours
- 13 Reverse function for winter and summer
- 14 Timer: Fan stops after 2h/4h/8h

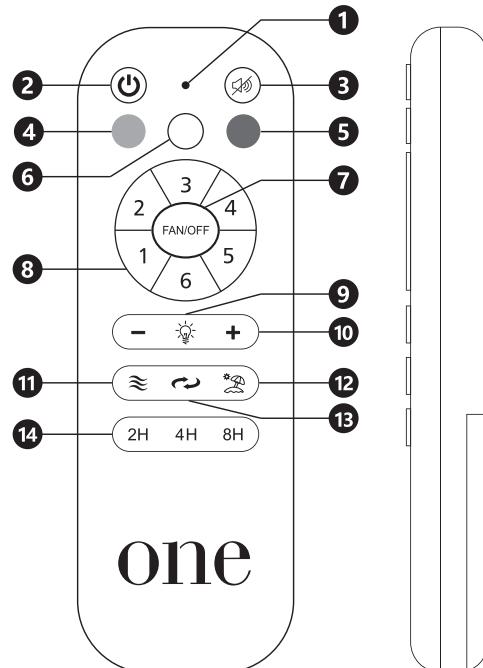

NOTE: To pair a remote to a receiver turn ON the power supply to the fan and press the ON/OFF and MUTE keys on the remote for 3 to 5 seconds. You will hear a beep.

PACKAGE CONTENTS

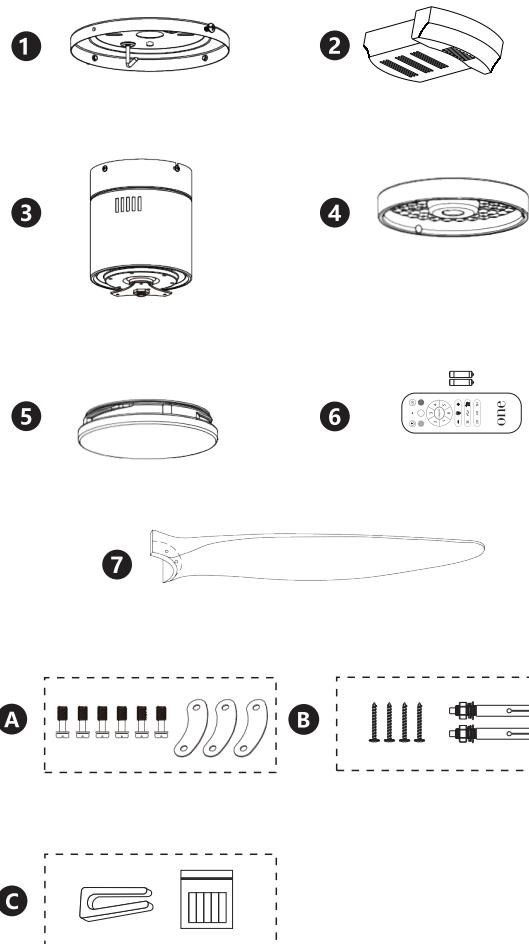

- 1 Mounting bracket
- 2 Receiver
- 3 Motor
- 4 22W LED
- 5 Diffuser
- 6 Remote control + holder
+2 mounting screws
+1.5V (AAA)x2 batteries
- 7 Fan blades (3pcs)
- A Screws for blades
- B Mounting hardware
- C Blade balancing kit

NOTE: When switching mains ON, light automatically turns on.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.