



Recessed Spots Fixed LED

Pages 33-82

02




The Super Mini Series




10101L/W/W

10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.





10101L/B/W



10101L/W/BL

10101L | 1W | LED | Aluminium



Driver can not pass through the cut-out hole.



10101LA/W/W

10101LA | 2W | COB | Aluminium

Driver can not pass through the cut-out hole.

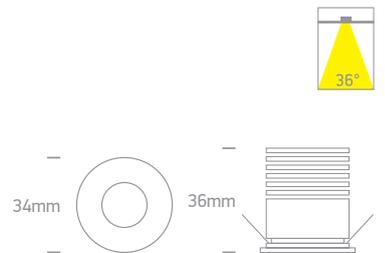

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	💡	📏	📦	Notes
10101L/W/W	White	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/B/W	Black	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101LA/W/W	White	Warm white	3000K	2W	190lm	36°	700mA	III	200cm	27mm	55mm	100	Requires 700mA driver


Mini Spots Aluminium




10103B/AL/W

10103B | 1W/2W | COB | Aluminium

1W@350mA / 2W@700mA.




10103B/W/C

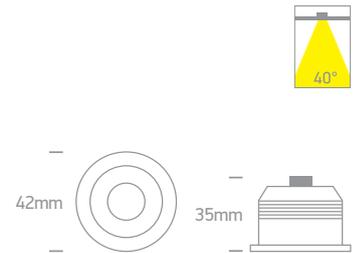


10103C/B/W

10103C | 3W | COB | Aluminium

new
IP20



Suitable for 89004 driver.

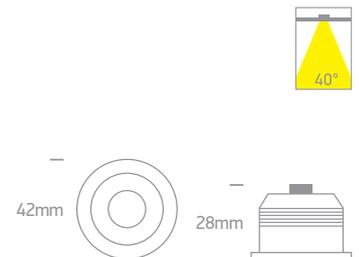


10103B/W/V

10103B | 3W | COB | Aluminium

new
IP20



Suitable for 89004 driver.

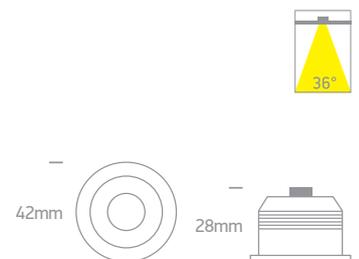


10103B/B/V

10103B | 3W | COB | Aluminium

new
IP20



Suitable for 89004 driver.

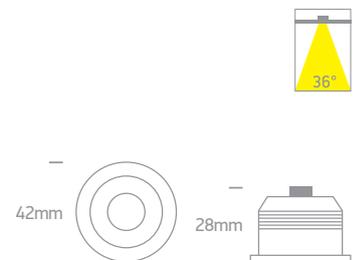

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	Ⓡ	Ⓜ	Ⓛ	Notes
10103B/W/C	White	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA	Ⓢ	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	Ⓢ	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103C/B/W	Black	Warm white	3000K	3W	300lm	40°	350mA	Ⓢ	40cm	36mm	38mm	100	Requires 350mA driver
10103B/W/V	White	CCT V	3000K-3500K-4000K	3W	300lm	36°	350mA	Ⓢ	40cm	35mm	38mm	100	Requires 350mA driver
10103B/B/V	Black	CCT V	3000K-3500K-4000K	3W	300lm	36°	350mA	Ⓢ	40cm	35mm	38mm	100	Requires 350mA driver



The 3W Dark Light Range
Aluminium



10103E/W/B/W



10103E/W/BS/W



10103E/B/BS/W

The 3W Dark Light Range

Aluminium



10103E/B/BS/W



10103E/W/B/W

10103E/W/BS/W




10103E/W/B/W

10103E | 3W | COB | Aluminium



10103E/W/BS/W

10103E | 3W | COB | Aluminium



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	⌘	⏏	📦	Notes
10103E/W/B/W	White	Black	Warm white	3000K	3W	240lm	36°	350mA	⚡	40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/BS/W	White	Brass	Warm white	3000K	3W	240lm	36°	350mA	⚡	40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/BS/W	Black	Brass	Warm white	3000K	3W	240lm	36°	350mA	⚡	40cm	44mm	60mm	50	Requires 350mA driver

The 7W/8W Range



10108R/W/W


IP20

10108R | 8W | COB | Aluminium

80 CRI
LED BUILT IN
CE
3 YEAR



10108R/B/W



10107DC/B/W

DARK LIGHT
IP20

10107DC | 7W | COB | Aluminium

80 CRI
LED BUILT IN
CE
2 YEAR



10108D1/W/W

DARK LIGHT
IP20

10108D1 | 8W | COB | Aluminium

80 CRI
LED BUILT IN
CE
3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10108R/W/W	White	Warm white	3000K	8W	750lm	60°	230V	□	-	68mm	50mm	50	Complete with 350mA driver
10108R/B/W	Black	Warm white	3000K	8W	750lm	60°	230V	□	-	68mm	50mm	50	Complete with 350mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V	□	15cm	55mm	110mm	50	Complete with 300mA driver
10108D1/W/W	White	Warm white	3000K	8W	560lm	36°	230V	□	-	73mm	105mm	50	Complete with 300mA driver



The 8W Asymmetric Range



10108A | 8W | COB | Aluminium | Asymmetric reflector

LED BUILT IN
80 CRI
CE
3 YEAR


DARK LIGHT
IP20



50108A | 8W | COB | Aluminium | Asymmetric reflector

LED BUILT IN
80 CRI
CE
3 YEAR

DARK LIGHT
IP20

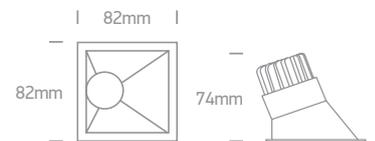

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		68mm	85mm	20	Complete with 350mA driver
50108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		73x73mm	85mm	50	Complete with 350mA driver

The 12W Dark Light Range Aluminium



10112TD | 12W | COB | Aluminium



10112TD/B/W

DARK LIGHT
IP20



LED
BUILT IN

80
CRI

CE

3
YEAR




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V		82mm	100mm	50	Complete with 300mA driver




The Mix & Match Range

10112HA | 12W | COB | Aluminium

GU10 version on page 7.



DARK LIGHT
IP20



10112HA/B/W



10112HA/W/W

050182 | Rings for 10112HA | Aluminium




IP20



050182/B Black



050182/BS Brass



050182/W White

050182R | Round base for 10112HA | Aluminium




IP20



050182R/B Black



050182R/BS Brass



050182R/W White

050182RA | Square base for 10112HA | Aluminium




IP20



050182RA/B Black



050182RA/BS Brass



050182RA/W White

050182RB | Double Square base for 10112HA | Aluminium




IP20



050182RB/B Black



050182RB/BS Brass



050182RB/W White

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA		40cm	66mm	135mm	50	Requires 700mA driver




The Dark Light Pro Range

Aluminium CCT V




10110FD/W/V

10110FD | 10W | COB | Aluminium

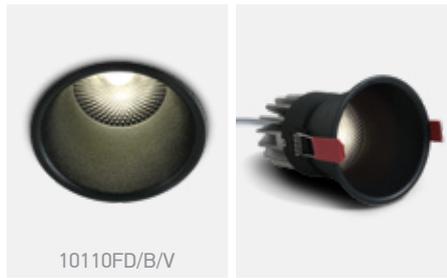


10110FD/B/V



10115FD/W/V

10115FD | 15W | COB | Aluminium

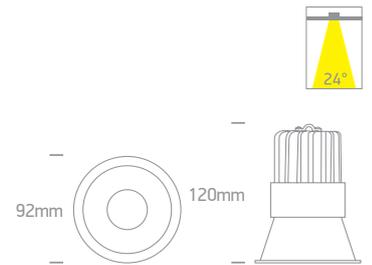

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110FD/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10110FD/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10115FD/W/V	White	CCT V	3000K-3500K-4000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver

The Dark Light Pro Range Aluminium



10105FD | 5W | COB | Aluminium




10105FD/B/W

DARK LIGHT
IP20



10105FD/W/W



10115FD | 15W | COB | Aluminium




10115FD/B/W

DARK LIGHT
IP20



10115FD/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105FD/W/W	White	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver



The Retro Dark Light Range



10107Z/B/W



10112Z/W/W



10120Z/B/W

The Retro Dark Light Range



10107Z/W/W

10107Z | 7W | COB | Aluminium + plastic

LED BUILT IN
80 CRI
CE
3 YEAR


IP20



10107Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378A/W.

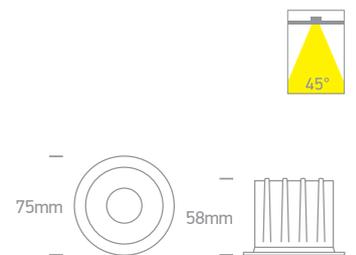

10112Z/W/W

10112Z | 12W | COB | Aluminium + plastic

LED BUILT IN
80 CRI
CE
3 YEAR


IP20



10112Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.

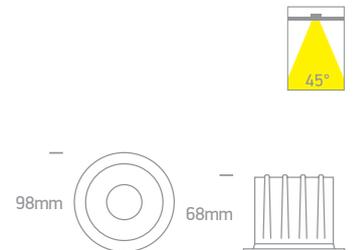

10120Z/W/W

10120Z | 20W | COB | Aluminium + plastic

LED BUILT IN
80 CRI
CE
3 YEAR


IP20



10120Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.

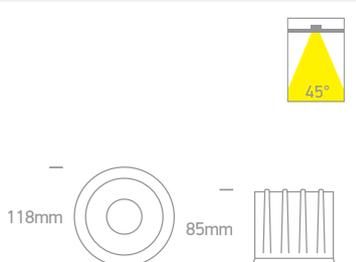

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	↓	📦	Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver



The COB Dark Light Range


10103LB | 3W | COB | Aluminium



10103LB/W/W

DARK LIGHT

IP20




10103LB | 3W | COB | Aluminium



10103LB/B/W

DARK LIGHT

IP20



10107RA | 7W | COB | Aluminium




10107RA/W/V

new

DARK LIGHT

IP20

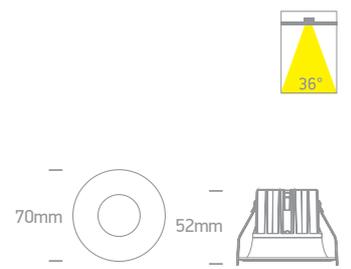

10112RA | 12W | COB | Aluminium




10112RA/W/V


new

DARK LIGHT

IP20

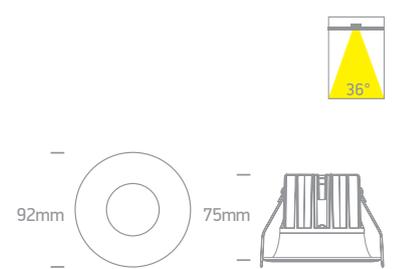

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆️	📦	Notes
10103LB/W/W	White	Warm white	3000K	3W	300lm	36°	350mA	⚡	40cm	38mm	55mm	100	Requires 350mA driver
10103LB/B/W	Black	Warm white	3000K	3W	300lm	36°	350mA	⚡	40cm	38mm	55mm	100	Requires 350mA driver
10107RA/W/V	White	CCT V	3000K-4000K-5000K	7W	500lm	36°	230V	⏏	-	55mm	80mm	50	Complete with 160mA driver
10112RA/W/V	White	CCT V	3000K-4000K-5000K	12W	900lm	36°	230V	⏏	-	75mm	90mm	50	Complete with 300mA driver

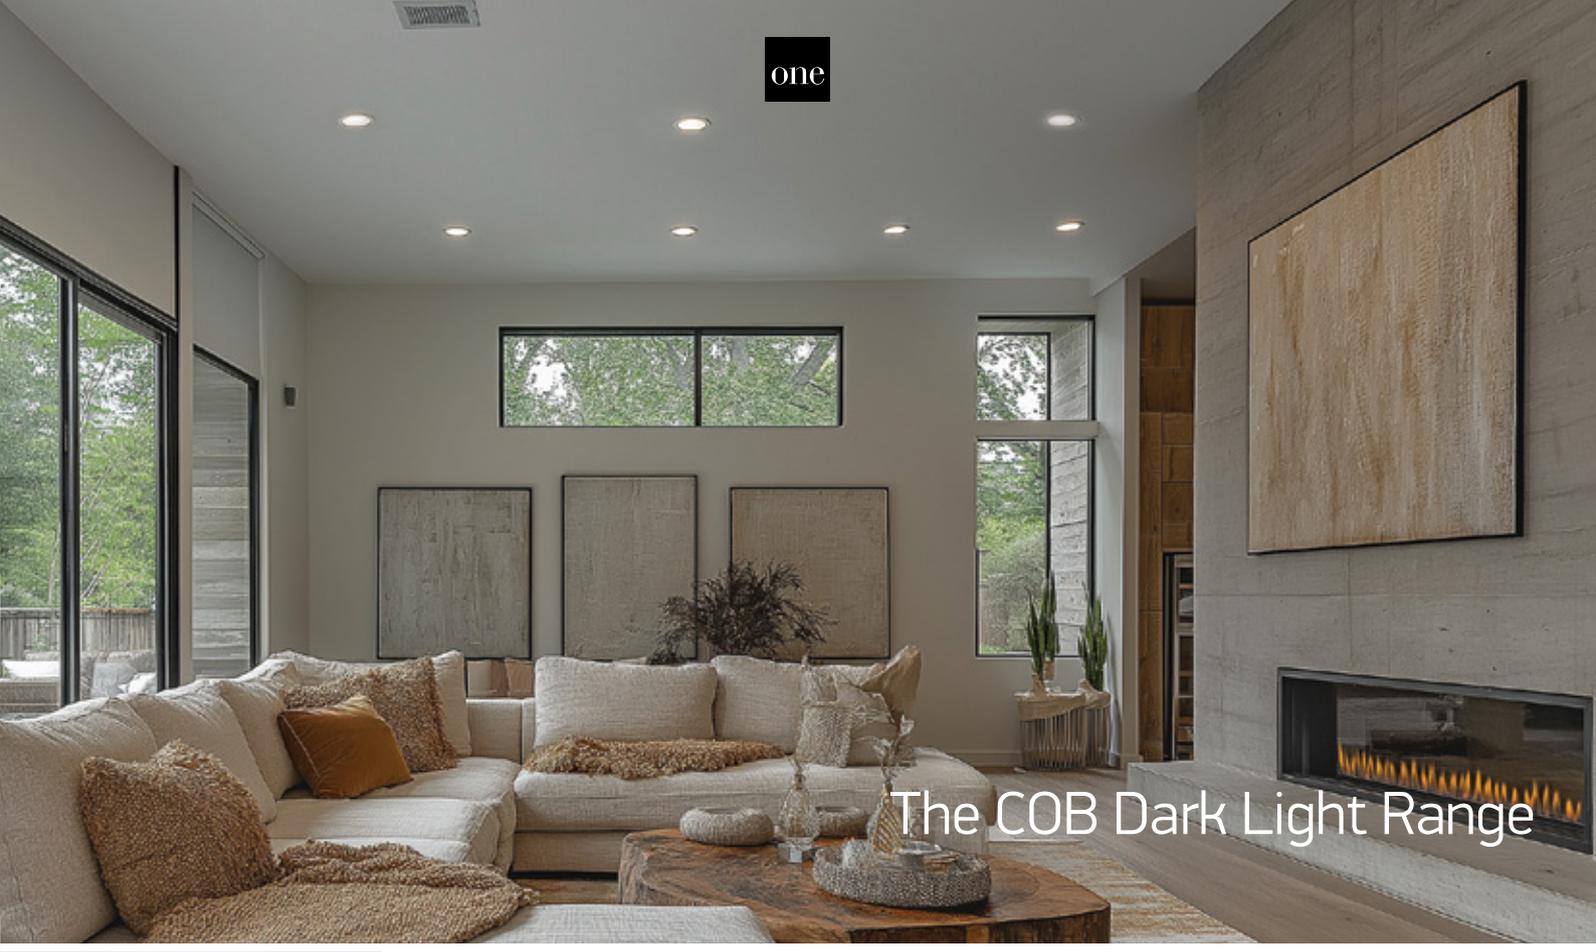


The COB Dark Light Range




10107D | 7W | COB | Aluminium

LED BUILT IN
new
90 CRI
3 YEAR
DARK LIGHT
IP20

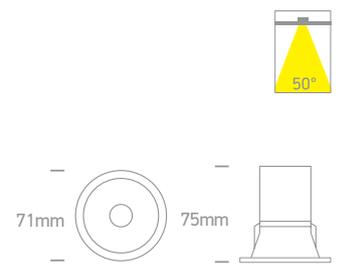


10112D | 12W | COB | Aluminium

LED BUILT IN
new
90 CRI
3 YEAR
DARK LIGHT
IP20

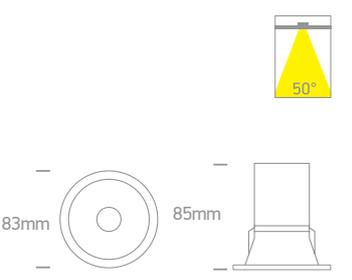

10115D | 15W | COB | Aluminium

LED BUILT IN
new
90 CRI
3 YEAR
DARK LIGHT
IP20

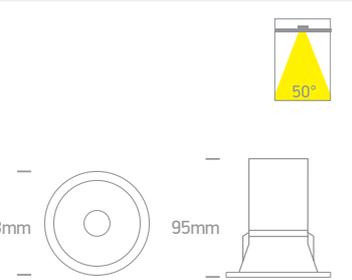

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107D/W/V	White	CCT V	3000K-4000K-5000K	7W	630lm	50°	230V		65mm	95mm	50	Complete with 160mA driver
10112D/W/V	White	CCT V	3000K-4000K-5000K	12W	1080lm	50°	230V		72mm	100mm	50	Complete with 300mA driver
10115D/W/V	White	CCT V	3000K-4000K-5000K	15W	1350lm	50°	230V		83mm	110mm	30	Complete with 350mA driver



The Super Deep Dark Light Range



10103J | 3W | LED | Aluminium

new
DARK LIGHT
IP20



LED BUILT IN
90 CRI
CE
3 YEAR



10107J | 7W | LED | Aluminium

new
DARK LIGHT
IP20


LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10107JTR | 7W | LED | Trimless | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Light	Height	Box	Notes
10103J/W/W	White	Warm white	3000K	3W	150lm	36°	230V	□	25mm	100mm	50	Complete with 700mA driver
10103J/B/W	Black	Warm white	3000K	3W	150lm	36°	230V	□	25mm	100mm	50	Complete with 700mA driver
10107J/W/V	White	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V	□	34mm	110mm	30	Complete with 160mA driver
10107J/B/V	Black	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V	□	34mm	110mm	30	Complete with 160mA driver
10107JTR/W/V	White	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V	□	45mm	130mm	30	Complete with 160mA driver



10118DX/W/V

10112DX/W/V

10107DX/W/V

The COB Dark Light Range


CCT V



10107DX/W/V

10107DX | 7W | COB | Aluminium


LED BUILT IN
 90 CRI
 CCT V
 CE
 5 YEAR
 DARK LIGHT
 IP20



10112DX/W/V

10112DX | 12W | COB | Aluminium


LED BUILT IN
 90 CRI
 CCT V
 CE
 5 YEAR
 DARK LIGHT
 IP20



10118DX/W/V

10118DX | 18W | COB | Aluminium


LED BUILT IN
 90 CRI
 CCT V
 CE
 5 YEAR
 DARK LIGHT
 IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DX/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	36°	230V		54mm	60mm	50	Complete with 160mA driver
10112DX/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	36°	230V		70mm	70mm	30	Complete with 300mA driver
10118DX/W/V	White	CCT V	3000K-3500K-4000K	18W	1440lm	36°	230V		82mm	80mm	20	Complete with 450mA driver





The Mirror Dark Light Range

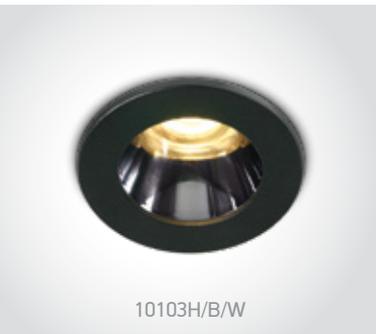

10103H | 3W | SMD | Aluminium

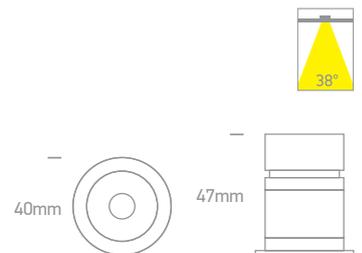


50103H | 3W | SMD | Aluminium

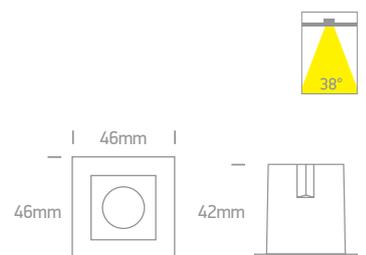

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Lighting Icon	Height	Box Icon	Notes
10103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	□	35mm	70mm	60	Complete with 700mA driver
10103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	□	35mm	70mm	60	Complete with 700mA driver
50103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	□	38x38mm	70mm	60	Complete with 700mA driver
50103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	□	38x38mm	70mm	60	Complete with 700mA driver




The Mirror Dark Light Range

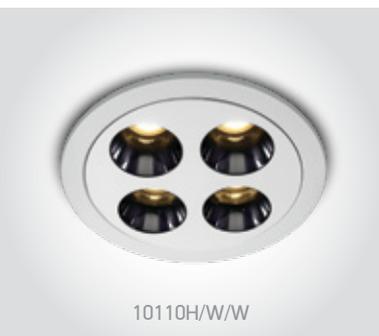

10110H | 10W | SMD | Aluminium

LED BUILT IN
 90 CRI
 CE
 5 YEAR


DARK LIGHT
IP20

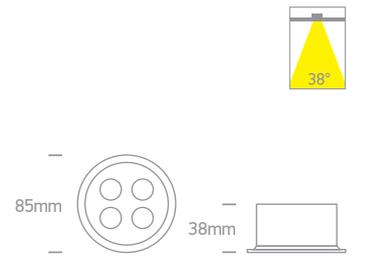

50110H | 10W | SMD | Aluminium

LED BUILT IN
 90 CRI
 CE
 5 YEAR


DARK LIGHT
IP20

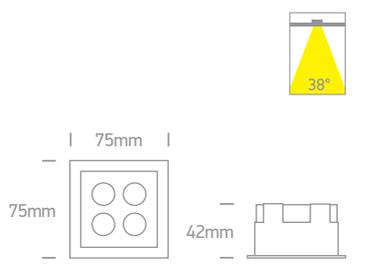

50012H | 12W | SMD | Aluminium

LED BUILT IN
 90 CRI
 CE
 5 YEAR

DARK LIGHT
IP20

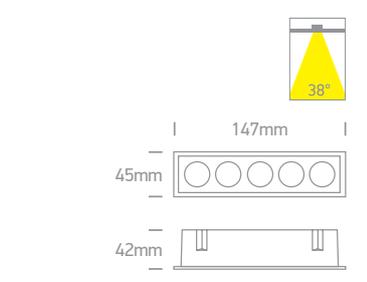


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/🔧	⬆️/⬆️	📦	Notes
10110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	75mm	60mm	40	Complete with 700mA driver
10110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V	□	75mm	60mm	40	Complete with 700mA driver
50110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	68x68mm	60mm	40	Complete with 700mA driver
50012H/W/W	White	Warm white	3000K	12W	840lm	38°	230V	□	140x36mm	80mm	40	Complete with 700mA driver
50012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V	□	140x36mm	80mm	40	Complete with 700mA driver

The COB Dark Light Range




10106DC/B/W

10106DC | 6W | COB | Aluminium

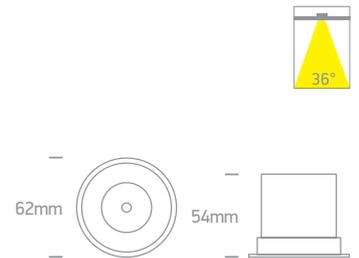


10118DC/W/W

10118DC | 18W | COB | Aluminium

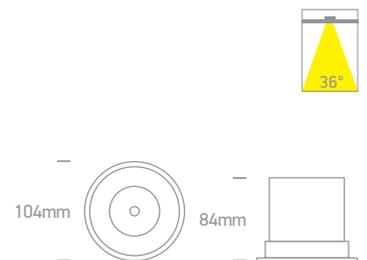

10118DC/B/W

10118DC | 18W | COB | Aluminium

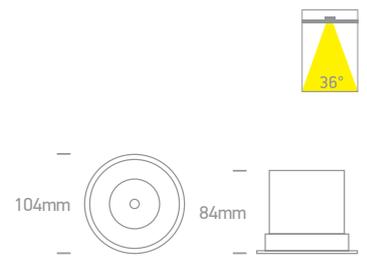

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DC/B/W	Black	Warm white	3000K	6W	570lm	36°	350mA		40cm	55mm	75mm	50	Requires 350mA driver
10118DC/W/W	White	Warm white	3000K	18W	1750lm	36°	500mA		40cm	94mm	100mm	30	Requires 500mA driver
10118DC/B/W	Black	Warm white	3000K	18W	1750lm	36°	500mA		40cm	94mm	100mm	30	Requires 500mA driver




The Round Mirror Range



10106X | 6W | SMD | Aluminium

LED BUILT IN
90 CRI
5 YEAR

DARK LIGHT
IP20

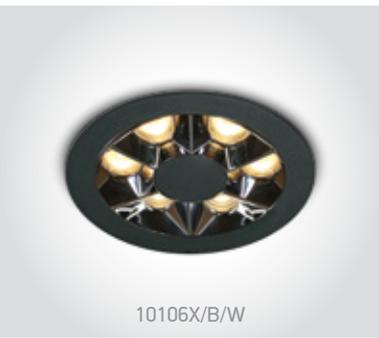

10106X | 6W | SMD | Aluminium

LED BUILT IN
90 CRI
5 YEAR

DARK LIGHT
IP20



10120X | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
5 YEAR

DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10106X/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		116mm	50mm	30	Complete with 450mA driver



The COB Dark Light Range Interchangeable Reflector

10107K | 6,5W | COB | Aluminium

Ring must be ordered separately.



10107K/W/W + 050104/B

DARK LIGHT
IP20



10107K/B/W + 050104/BS



050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	💡	⏏	📦	Notes
10107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	⚡	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	⚡	40cm	76mm	100mm	30	Requires 700mA driver



10112K/W/W + 050280/B

10112K/B/W + 050280/W

10107K/W/W + 050104/B

10107K/B/W + 050104/BS



The COB Dark Light Range Interchangeable Reflector



10112K/W/W + 050280/B

10112K | 12W | COB | Aluminium


Reflector must be ordered separately.

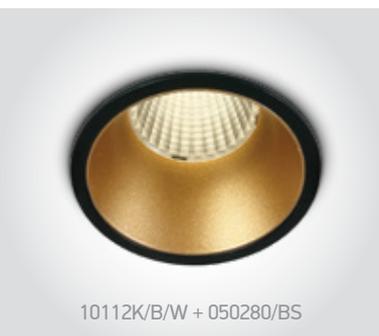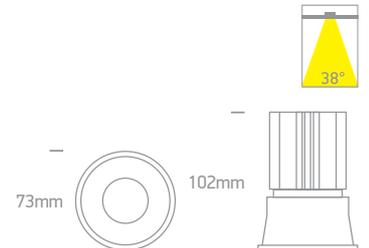

10112K/B/W + 050280/BS

10112K | 12W | COB | Aluminium


Reflector must be ordered separately.

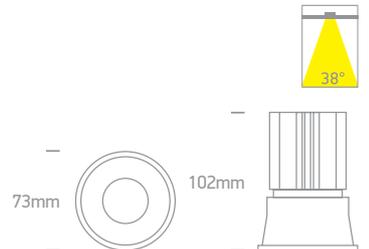

050280/W White



050280/B Black

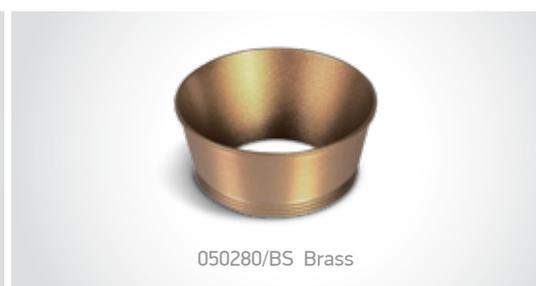

050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊞	⚡	⬆️	📦	Notes
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	⊞	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	⊞	40cm	67mm	120mm	50	Requires 700mA driver



50106B/B/W



50306B/W/W

Mirror Square Boxes Aluminium

50106B | 6W | COB | Aluminium




50106B/W/W

IP20



50106B/B/W

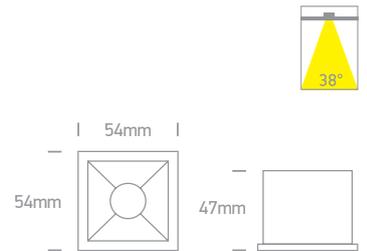

50306B | 12W | COB | Aluminium




50306B/W/W

IP20



50306B/B/W

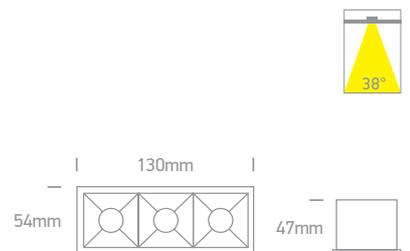


50406B | 16W | COB | Aluminium

Adjustable version page 145



50406B/W/W

IP20

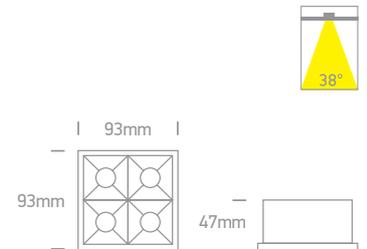

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes	
50106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V			50x45mm	70mm	50	Complete with 135mA driver
50106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V			50x45mm	70mm	50	Complete with 135mA driver
50306B/W/W	White	Warm white	3000K	12W	960lm	38°	230V			124x45mm	70mm	48	Complete with 300mA driver
50306B/B/W	Black	Warm white	3000K	12W	960lm	38°	230V			124x45mm	70mm	48	Complete with 300mA driver
50406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V			85x85mm	70mm	36	Complete with 400mA driver




Mirror Square Boxes Aluminium



50506B | 20W | COB | Aluminium

Adjustable version page 145



IP20



50006B | 40W | COB | Aluminium



IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50006B/W/W	White	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver

Mini Shop Square Boxes Aluminium




50102B/W/W

50102B | 2W | LED | Aluminium

LED BUILT IN
90 CRI

CE 3 YEAR

IP20

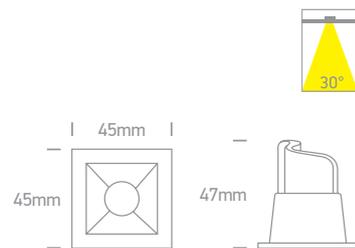


50102B/B/W

50102B | 2W | LED | Aluminium

LED BUILT IN
90 CRI

CE 3 YEAR

IP20

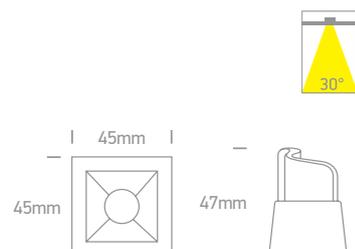


50202B/W/W

50202B | 2x2W | LED | Aluminium

LED BUILT IN
90 CRI

CE 3 YEAR

IP20

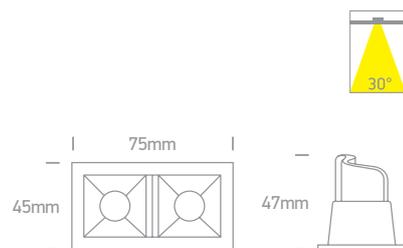


50202B/B/W

50202B | 2x2W | LED | Aluminium

LED BUILT IN
90 CRI

CE 3 YEAR

IP20

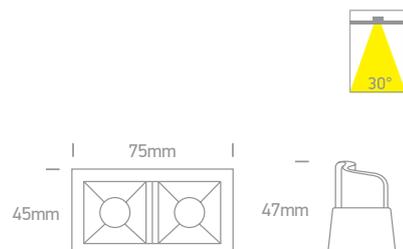

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89006PA driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89006PA driver

Mini Shop Square Boxes

Aluminium



50902B/W/W

50502B/B/W

50302B | 3x2W | LED | Aluminium




50302B/W/W

IP20



50302B/B/W

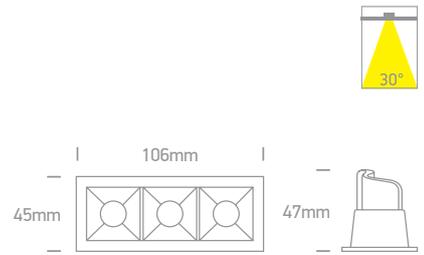

50502B | 5x2W | LED | Aluminium




50502B/W/W

IP20



50502B/B/W

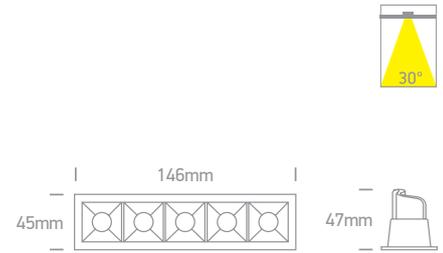

50902B | 10x2W | LED | Aluminium




50902B/W/W

IP20



50902B/B/W

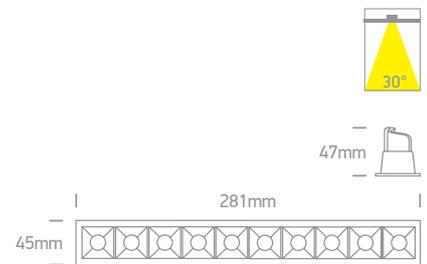

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⏏	⏏	📦	Notes
50302B/W/W	White	Warm white	3000K	3x2W	3x160lm	30°	700mA	⏏	30cm	97x36mm	60mm	50	Use 89008A driver
50302B/B/W	Black	Warm white	3000K	3x2W	3x160lm	30°	700mA	⏏	30cm	97x36mm	60mm	50	Use 89008A driver
50502B/W/W	White	Warm white	3000K	5x2W	5x160lm	30°	700mA	⏏	30cm	137x36mm	60mm	30	Use 89015A driver
50502B/B/W	Black	Warm white	3000K	5x2W	5x160lm	30°	700mA	⏏	30cm	137x36mm	60mm	30	Use 89015A driver
50902B/W/W	White	Warm white	3000K	10x2W	10x160lm	30°	700mA	⏏	30cm	272x36mm	60mm	20	Use 89030A driver
50902B/B/W	Black	Warm white	3000K	10x2W	10x160lm	30°	700mA	⏏	30cm	272x36mm	60mm	20	Use 89030A driver



50307B/W/W




50107B/W/W

Medium Shop Square Boxes

50107B | 6,5W | COB | Aluminium + steel

LED BUILT IN
90 CRI
DIMMABLE **QUICK FIX**
CE **3 YEAR**





50107B/W/W

IP20

50207B | 2x6,5W | COB | Aluminium + steel

LED BUILT IN
90 CRI
DIMMABLE **QUICK FIX**
CE **3 YEAR**

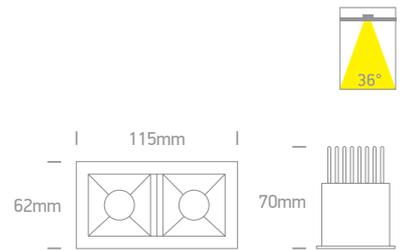


50207B/W/W

IP20

50307B | 3x6,5W | COB | Aluminium + steel

LED BUILT IN
90 CRI
DIMMABLE **QUICK FIX**
CE **3 YEAR**

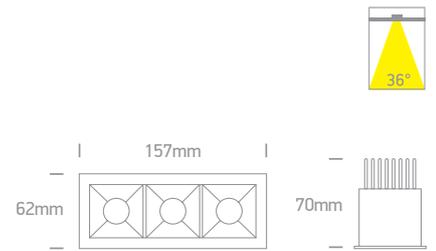


50307B/W/W

IP20

50507B | 5x6,5W | COB | Aluminium + steel

LED BUILT IN
90 CRI
DIMMABLE **QUICK FIX**
CE **3 YEAR**

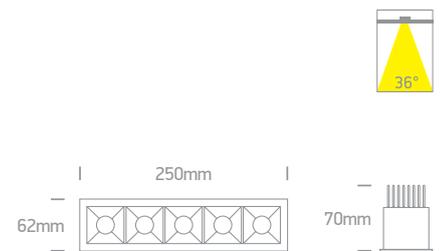

50507B/W/W

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA		40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA		40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA		40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA		40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers



Dark Light Tubes

50406C | 10W | SMD | Aluminium





50406C/W/W

LED BUILT IN
85 CRI
CE
3 YEAR

DARK LIGHT
IP20



50406C/B/W




50906C | 22W | SMD | Aluminium



50906C/W/W

LED BUILT IN
85 CRI
CE
3 YEAR

DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50906C/W/W	White	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver


The COB IP54 Range

10107WD | 6,5W | COB | Aluminium



10107WD/W/W

LED BUILT IN
 90 CRI
 DIMMABLE
 QUICK FIX
 DARK LIGHT
 IP54
 CE
 5 YEAR

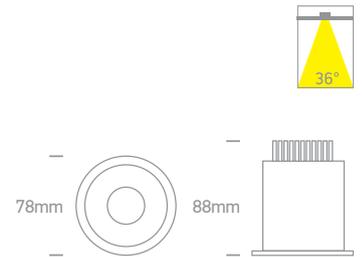


10107WD | 6,5W | COB | Aluminium



10107WD/W/V

LED BUILT IN
 90 CRI
 DIMMABLE
 CCT V
 DARK LIGHT
 IP54
 CE
 5 YEAR
 new

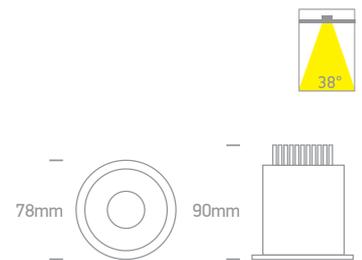


10107M | 7W | COB | Aluminium



10107M/W/W

LED BUILT IN
 90 CRI
 CE
 3 YEAR
 DARK LIGHT
 IP54

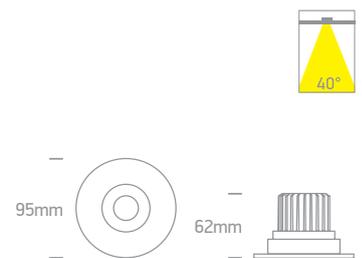




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107WD/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10107M/W/W	White	Warm white	3000K	7W	490lm	40°	230V		-	68mm	80mm	50	Complete with 300mA driver




The COB IP54 Dark Light Range



10108H | 8W | COB | Aluminium

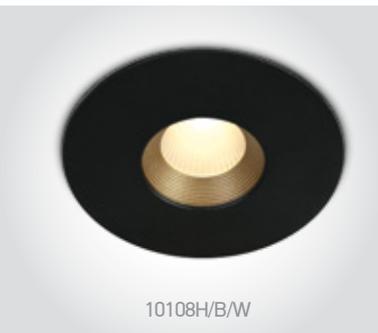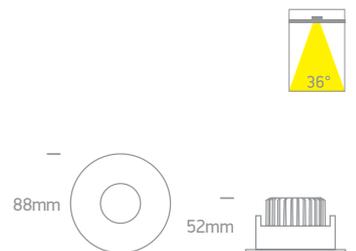

10108H | 8W | COB | Aluminium

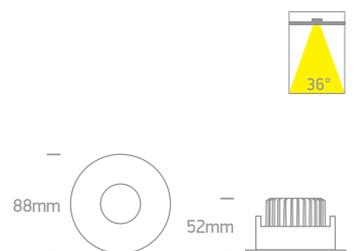

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108H/W/W	White	Warm white	3000K	8W	625lm	36°	230V		75mm	70mm	50	Complete with 200mA driver
10108H/B/W	Black	Warm white	3000K	8W	625lm	36°	230V		75mm	70mm	50	Complete with 200mA driver



The IP65 Mini Range





10103M/W/C

10103M | 3W | SMD | Aluminium





10103M/W/W





10103M/B/W

10103M | 3W | SMD | Aluminium



10103M/AL/W

10103M | 3W | SMD | Aluminium




10102H/W/W

10102H | 2W | LED | Aluminium



10102H/B/W

Driver can not pass through the cut-out hole.

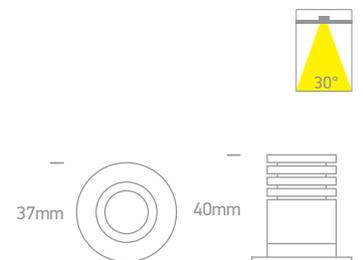

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103M/W/C	White	Cool white	4000K	3W	270lm	30°	700mA	II	60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/W	White	Warm white	3000K	3W	270lm	30°	700mA	II	60cm	38mm	55mm	50	Requires 700mA driver
10103M/B/W	Black	Warm white	3000K	3W	270lm	30°	700mA	II	60cm	38mm	55mm	50	Requires 700mA driver
10103M/AL/W	Aluminium	Warm white	3000K	3W	270lm	30°	700mA	II	60cm	38mm	55mm	50	Requires 700mA driver
10102H/W/C	White	Cool white	4000K	2W	160lm	30°	700mA	II	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	II	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	II	100cm	30mm	50mm	100	Requires 700mA driver

The 6,5W IP65 Project Range Aluminium




10107DL | 6,5W | COB | Aluminium



10107DL/W/W/V

new
DARK LIGHT
IP65

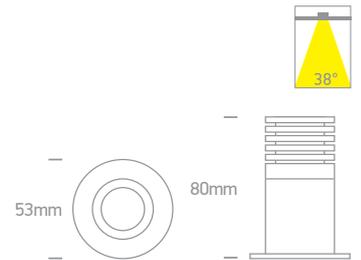


10107DL | 6,5W | COB | Aluminium



10107DL/W/B/V

new
DARK LIGHT
IP65

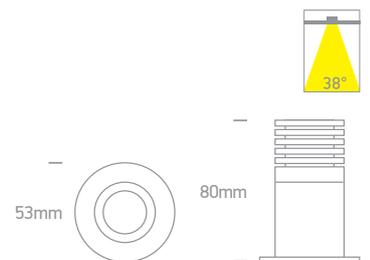

10107H | 6,5W | COB | Aluminium




10107H/W/W

DARK LIGHT
IP65




10107H/W/C

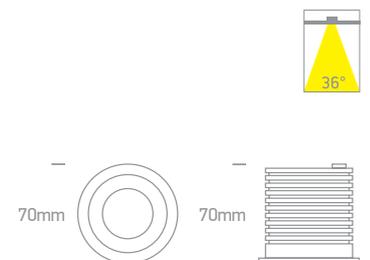

Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	⬆️	📦	Notes
10107DL/W/W/V	White	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	⚡	40cm	47mm	90mm	50	Requires 700mA driver
10107DL/W/B/V	White	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	⚡	40cm	47mm	90mm	50	Requires 700mA driver
10107H/W/C	White	-	Cool white	4000K	6,5W	600lm	36°	700mA	⚡	40cm	60mm	90mm	50	Requires 700mA driver
10107H/W/W	White	-	Warm white	3000K	6,5W	600lm	36°	700mA	⚡	40cm	60mm	90mm	50	Requires 700mA driver

The COB Curved Reflector IP65 Range

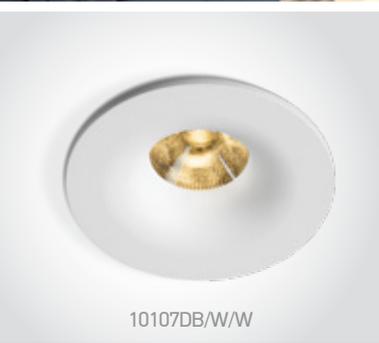


10107DB/W/W



10107DB | 6,5W | COB | Aluminium

LED BUILT IN
90 CRI
 DIMMABLE
 QUICK FIX
5 YEAR

DARK LIGHT
IP65



10107DB/B/W

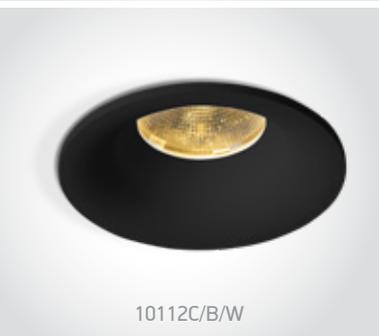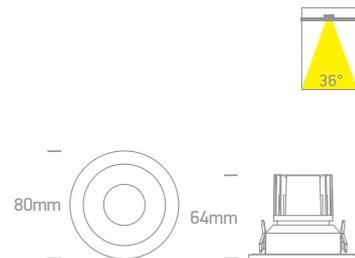


10112C/B/W

10112C | 12W | COB | Aluminium

LED BUILT IN
90 CRI
 DIMMABLE
 QUICK FIX
5 YEAR

DARK LIGHT
IP65

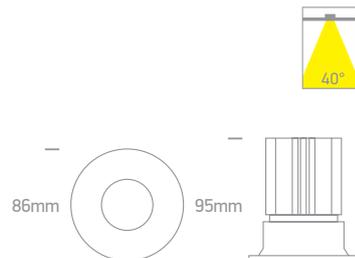


10112C/W/V

10112C | 12W | COB | Aluminium

LED BUILT IN
90 CRI
 DIMMABLE
cct v
 QUICK FIX
5 YEAR

new
DARK LIGHT
IP65

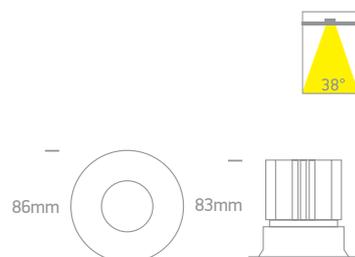

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DB/W/W	White	Warm white	3000K	6,5W	500lm	36°	700mA		40cm	60mm	80mm	50	Requires 700mA driver
10107DB/B/W	Black	Warm white	3000K	6,5W	500lm	36°	700mA		40cm	60mm	80mm	50	Requires 700mA driver
10112C/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA		40cm	75mm	120mm	50	Requires 700mA driver
10112C/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA		40cm	75mm	100mm	50	Requires 700mA driver



The COB IP64 & IP65 Range

10107PA | 6,5W | COB | Aluminium




10107PA/W/W

new
IP65



10107PA/W/C




10107PA | 6,5W | COB | Aluminium



10107PA/W/V

new
IP65



10112P | 12W | COB | Aluminium




10112P/W/W

DARK LIGHT
IP65



10112P/B/W




10112P | 12W | COB | Natural aluminium




10112P/AL/W

DARK LIGHT
IP64



	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚙	⏏	📦	Notes
10107PA/W/C	White	Cool white	4000K	6,5W	650lm	40°	700mA	⏏	40cm	54mm	70mm	50	Requires 700mA driver
10107PA/W/W	White	Warm white	3000K	6,5W	650lm	40°	700mA	⏏	40cm	54mm	70mm	50	Requires 700mA driver
10107PA/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	40°	700mA	⏏	40cm	54mm	70mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	⏏	40cm	68mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	⏏	40cm	68mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA	⏏	40cm	68mm	105mm	50	Requires 700mA driver

Floating Ring Range

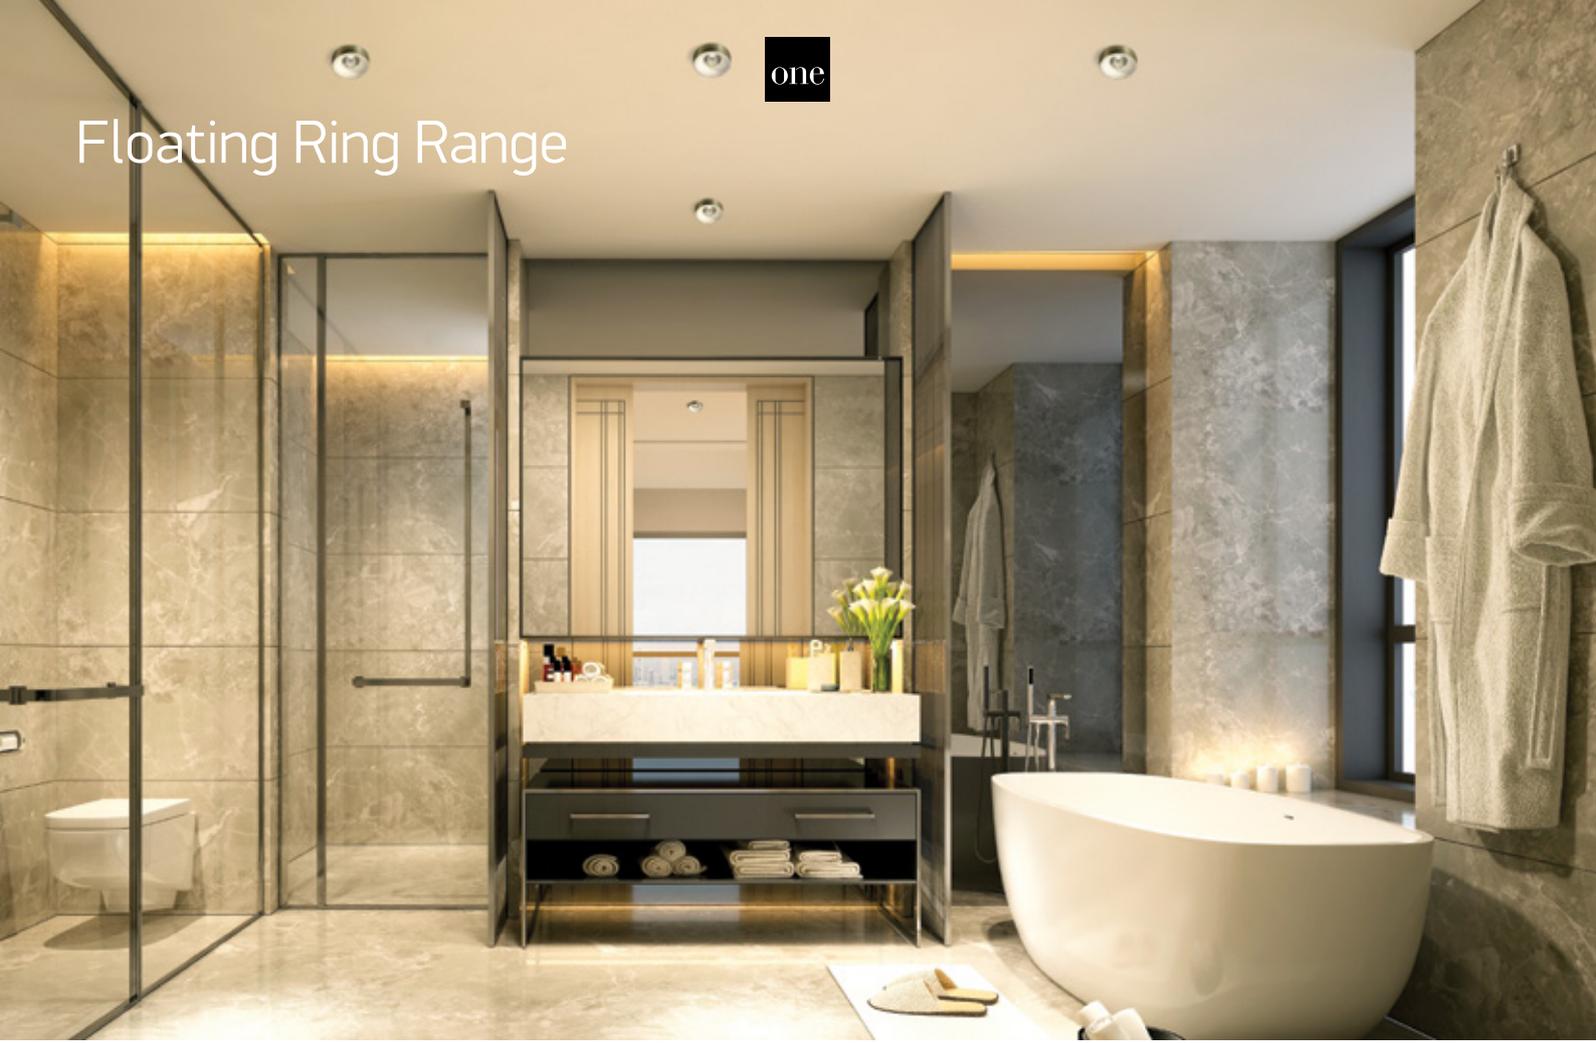


10112R | 12W | COB | Aluminium



10112R/W/W



10112R/W/W + 050162/B

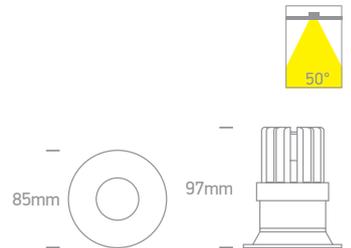


10112R | 12W | COB | Aluminium



10112R/B/W



10112R/B/W + 050162/W

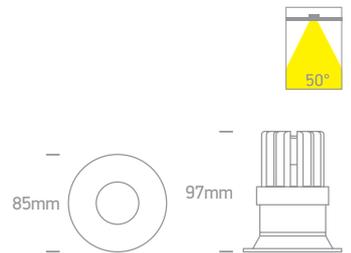

050162/W White



050162/B Black



050162/DC Dark Chrome

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⏏	⏏	⏏	⏏	Notes
10112R/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA	⏏	40cm	68mm	110mm	80mm	50	Requires 700mA driver
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA	⏏	40cm	68mm	110mm	80mm	50	Requires 700mA driver



10112TP/B/V

10112TP/W/W

The COB IP65 Dark Light Range

10107WP | 6,5W | COB | Aluminium



10107WP/W/V

new
DARK LIGHT
IP65



new



10107WP/B/V




10112TP | 12W | COB | Aluminium



10112TP/W/W

DARK LIGHT
IP65



10112TP/B/W



10112TP | 12W | COB | Aluminium



10112TP/W/V


new
DARK LIGHT
IP65



new



10112TP/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊕	⚡	⬆️	📦	Notes
10107WP/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	⊕	40cm	56mm	90mm	50	Requires 700mA driver
10107WP/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	⊕	40cm	56mm	90mm	50	Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	⊕	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA	⊕	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	⊕	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	⊕	40cm	75mm	100mm	50	Requires 700mA driver
10112TP/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	⊕	40cm	75mm	100mm	50	Requires 700mA driver



The IP65 Range



10106V | 6W | COB | Aluminium + glass




10103NP | 3x1W | LED | Natural aluminium

Suitable for 89004 driver.



10106P | 6W | SMD | Dimmable | Plastic

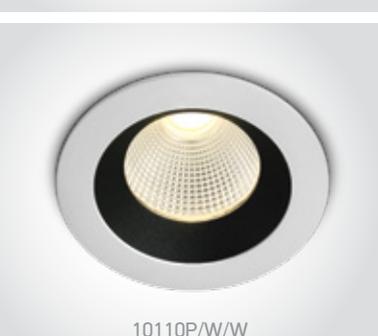

10110P | 12W | COB | Aluminium

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106V/W/W	White	Warm white	3000K	6W	460lm	25°	100-240V	⊕	-	94mm	100mm	12	Complete with 500mA driver
10106V/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V	⊕	-	94mm	100mm	12	Complete with 500mA driver
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	⊖	200cm	70mm	70mm	50	Requires 350mA driver
10106P/W/C	White	Cool white	4000K	6W	570lm	100°	230V	⊖	-	67mm	70mm	48	Complete with dimmable driver
10106P/W/W	White	Warm white	3000K	6W	570lm	100°	230V	⊖	-	67mm	70mm	48	Complete with dimmable driver
10110P/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	⊖	40cm	75mm	110mm	48	Requires 700mA driver
10110P/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	⊖	40cm	75mm	110mm	48	Requires 700mA driver

one



The IP65 CCT V



10107PV/W/V

10107PV | 7W | SMD | Dimmable | Plastic



LED
BUILT IN

85
CRI



CE

3
YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	Ⓜ	Ⓩ	📦	Notes
10107PV/W/V	White	CCT V	2700K-3000K-4000K	7W	600lm	38°	230V	□	30cm	72mm	40mm	48	AC LED




The Fire Rated IP65 Range



10106PF | 6W | COB | Fire Rated | Aluminium

Ring must be ordered separately.

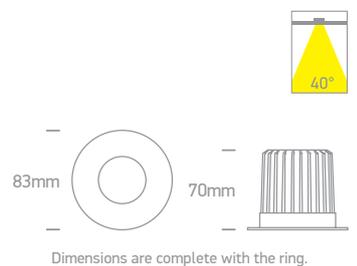

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	🔧	↕	📦	Notes
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver

The Fire Rated IP65 Range



10107DF/W + 050178/B

10106PF/W + 050042/C




10107DF/W

10107DF | 7W | SMD | Fire Rated | Metal + plastic

Complete with white ring.

80 CRI

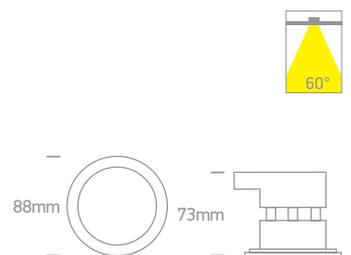


10107DFV/W/V

10107DFV | 7W | SMD | Fire Rated | Metal + plastic

Complete with white ring.

80 CRI

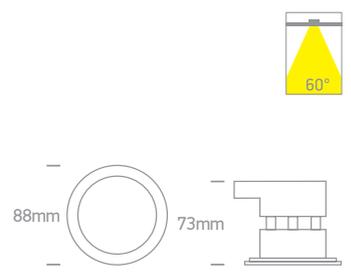

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DF/W	White	Warm white	3000K	7W	500lm	60°	230V		65mm	80mm	36	Complete with dimmable driver
10107DFV/W/V	White	CCT V	2700K-3200K-4000K	7W	510lm	60°	230V		65mm	80mm	36	Complete with dimmable driver

The LED Decorative Range



10108J | 8W | COB + SMD | Aluminium

Trim Lit.

80 CRI
LED BUILT IN
CE
3 YEAR




DARK LIGHT
IP40



10107HA | 6,5W | COB | Aluminium

90 CRI
LED BUILT IN
DIMMABLE
CCT V
CE
5 YEAR



new
IP20



10106L | 6W | LED | Aluminium

Use driver 89006P.

90 CRI
LED BUILT IN
DIMMABLE
QUICK FIX
CE
5 YEAR



DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	🔧	📏	📦	Notes
10108J/W/W	White	Warm white	3000K	8W	560lm	24°	230V	□	-	70mm	100mm	30	Complete with 200mA driver
10107HA/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	◇	40cm	68mm	80mm	50	Requires 700mA driver
10107HA/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	◇	40cm	68mm	80mm	50	Requires 700mA driver
10106L/W/W	White	Warm white	3000K	6W	360lm	40°	350mA	◇	40cm	33mm	80mm	50	Requires 350mA driver



10112A/W/W



10107A/B/W

Semi-Recessed Range




10107A/W/W

IP20

10107A | 7W | SMD | Aluminium

Semi-Recessed.

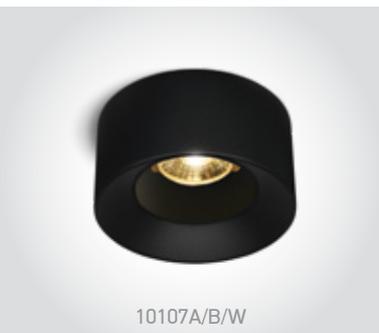

10107A/B/W

IP20

10107A | 7W | SMD | Aluminium

Semi-Recessed.




10112A/W/W

IP20

10112A | 12W | SMD | Aluminium

Semi-Recessed.

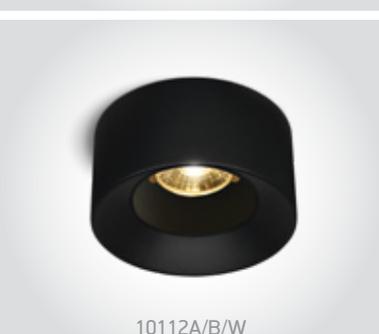

10112A/B/W

IP20

10112A | 12W | SMD | Aluminium

Semi-Recessed.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107A/W/W	White	Warm white	3000K	7W	600lm	38°	230V		54mm	40mm	50	Complete with 180mA driver
10107A/B/W	Black	Warm white	3000K	7W	600lm	38°	230V		54mm	40mm	50	Complete with 180mA driver
10112A/W/W	White	Warm white	3000K	12W	1100lm	38°	230V		72mm	40mm	50	Complete with 300mA driver
10112A/B/W	Black	Warm white	3000K	12W	1100lm	38°	230V		72mm	40mm	50	Complete with 300mA driver




10103BTR/W/W

10103BTR/B/W




10103BTR/BS/W

The Trimless 3W Range Aluminium

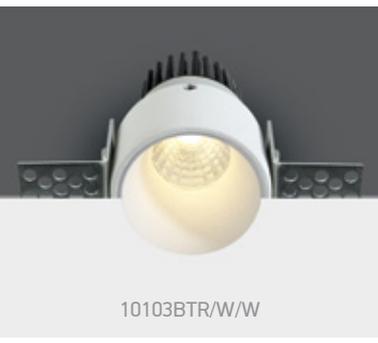




10103BTR/W/W

10103BTR | 3W | COB | Trimless | Aluminium

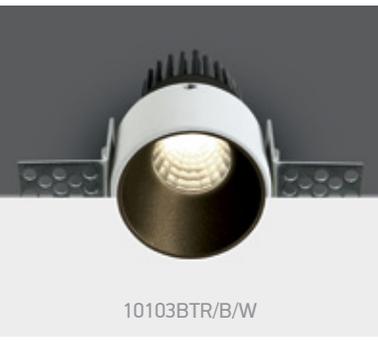


10103BTR/B/W

10103BTR | 3W | COB | Trimless | Aluminium

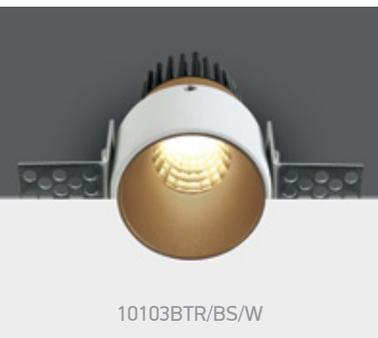

10103BTR/BS/W

10103BTR | 3W | COB | Trimless | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA		40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA		40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA		40cm	42mm	80mm	100	Requires 350mA driver



10107BT/B/V

10107BT/W/V


The Trimless 6,5W Range

CCT V




10107BT/W/V

10107BT | 6,5W | COB | Trimless | Aluminium

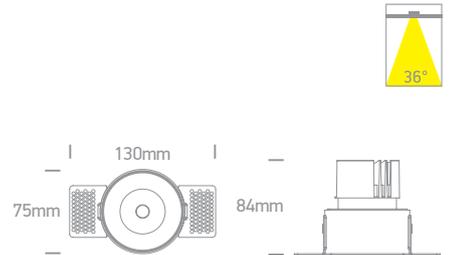

10107BT/B/V

10107BT | 6,5W | COB | Trimless | Aluminium

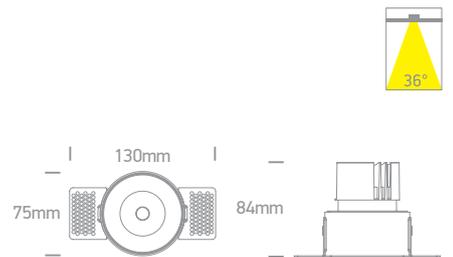

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊞	⊞	⊞	⊞	Notes
10107BT/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	700mA	⊞	40cm	83mm	100mm	30	Requires 700mA driver
10107BT/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	700mA	⊞	40cm	83mm	100mm	30	Requires 700mA driver

The Trimless 12W Range Aluminium




10112BTR/W/V

10112BTR | 12W | COB | Trimless | Aluminium

new
DARK LIGHT
IP20

90 CRI
DIMMABLE
CE
5 YEAR

LED BUILT IN
CCT V

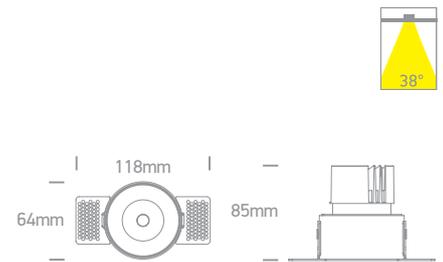



10112BTR/B/V

10112BTR | 12W | COB | Trimless | Aluminium

new
DARK LIGHT
IP20

90 CRI
DIMMABLE
CE
5 YEAR

LED BUILT IN
CCT V

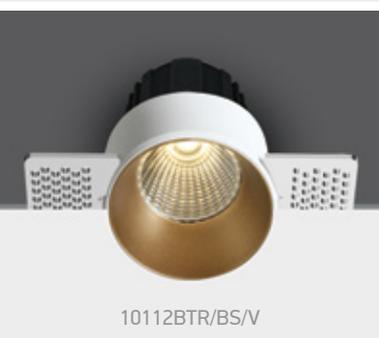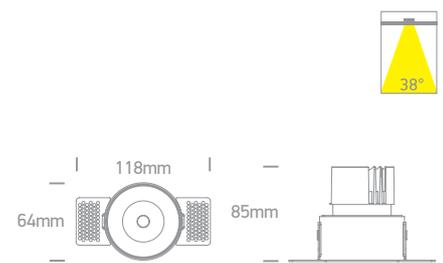


10112BTR/BS/V

10112BTR | 12W | COB | Trimless | Aluminium

new
DARK LIGHT
IP20

90 CRI
DIMMABLE
CE
5 YEAR

LED BUILT IN
CCT V


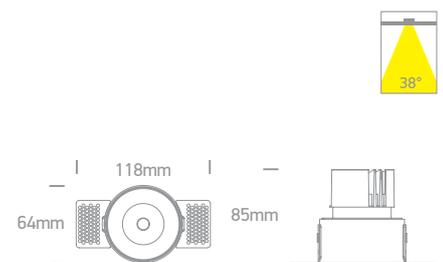


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112BTR/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA		40cm	70mm	100mm	48	Requires 700mA driver
10112BTR/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA		40cm	70mm	100mm	48	Requires 700mA driver
10112BTR/BS/V	Brass	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA		40cm	70mm	100mm	48	Requires 700mA driver

Trimless Dark Light Tubes



50103ATR | 3W | SMD | Trimless | Aluminium

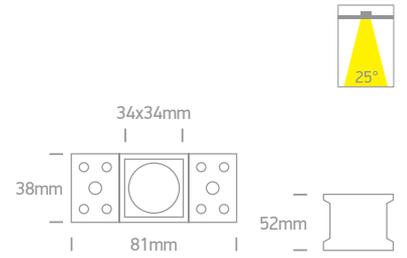

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌵	⬆️	📦	Notes
50103ATR/B/W	Black	Warm white	3000K	3W	200lm	25°	230V	□	50x38mm	70mm	50	Complete with 700mA driver




The Trimless Mirror Range Aluminium

10106XTR | 6W | SMD | Trimless | Aluminium



10106XTR/W/W

LED BUILT IN
90 CRI
5 YEAR
DARK LIGHT
IP20

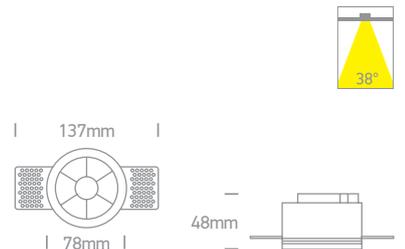


10112XTR | 12W | SMD | Trimless | Aluminium




10112XTR/W/W

LED BUILT IN
90 CRI
5 YEAR
DARK LIGHT
IP20

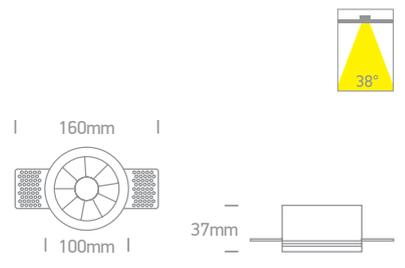

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106XTR/W/W	White	Warm white	3000K	6W	480lm	38°	230V		78mm	70mm	40	Complete with 150mA driver
10112XTR/W/W	White	Warm white	3000K	12W	960lm	38°	230V		100mm	60mm	40	Complete with 300mA driver

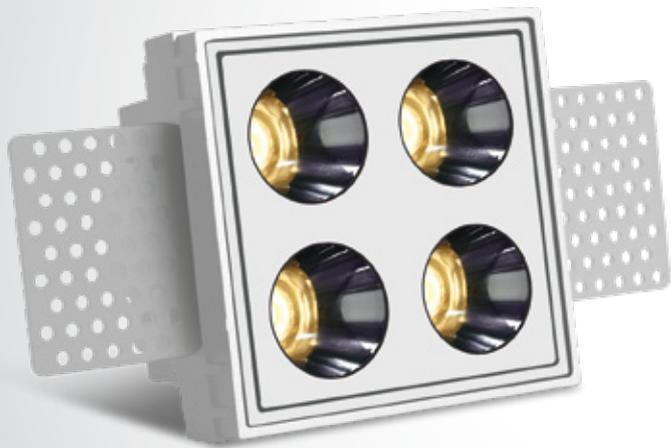

50110HTR/W/W




50012HTR/W/W

The Trimless Mirror Range Aluminium





10110HTR/W/W

10110HTR | 10W | SMD | Trimless | Aluminium

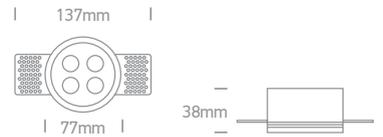


50110HTR/W/W

50110HTR | 10W | SMD | Trimless | Aluminium

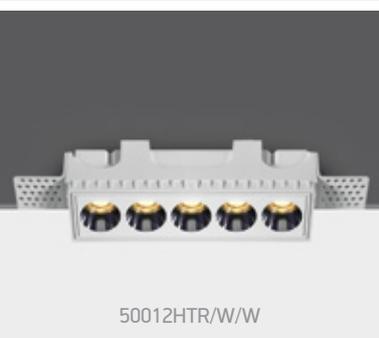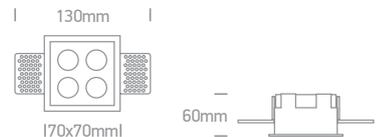

50012HTR/W/W

50012HTR | 12W | SMD | Trimless | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/🔧	↕	📦	Notes
10110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	78mm	80mm	40	Complete with 700mA driver
50110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	72x72mm	100mm	40	Complete with 700mA driver
50012HTR/W/W	White	Warm white	3000K	12W	840lm	38°	230V	□	145x41mm	100mm	40	Complete with 700mA driver