




Recessed Spots Fixed LED

Pages 39-90

02






The Super Mini Series

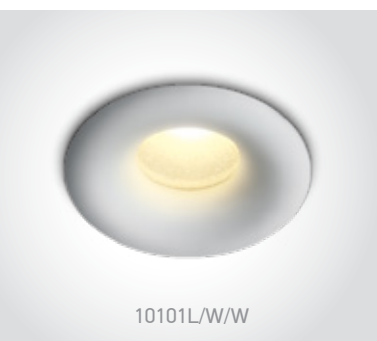





10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.





10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.

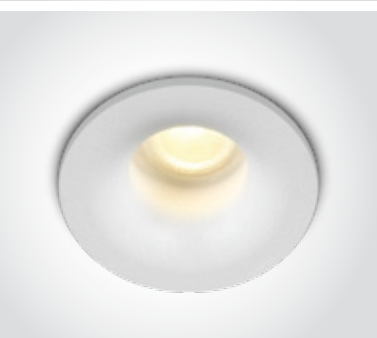

10101LA | 2W | COB LED | Die cast

Driver can not pass through the cut-out hole.

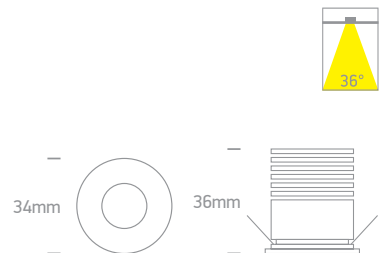

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	💡	📏	📦	Notes
10101L/W/W	White	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/B/W	Black	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101LA/W/W	White	Warm white	3000K	2W	190lm	36°	700mA	III	200cm	27mm	55mm	100	Requires 700mA driver



10103B | 1W/2W | COB LED | Aluminium 1W@350mA / 2W@700mA.

IP20

10103B/W/W



10103B | 1W/2W | COB LED | Aluminium 1W@350mA / 2W@700mA.

IP20



10103B | 1W/2W | COB LED | Aluminium 1W@350mA / 2W@700mA.

IP20


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⏏	📦	Notes
10103B/W/C	White	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA	⚡	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	⚡	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	⚡	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	⚡	40cm	35mm	50mm	100	Requires 350mA/700mA driver



10103E/W/W/W



10103E/W/BS/W

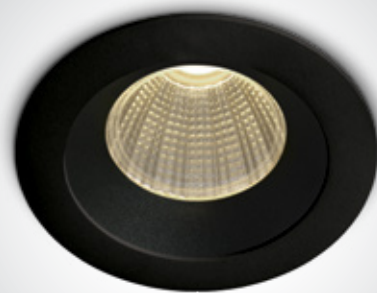

10103E/B/B/W

The 3W Dark Light Range

Aluminium




10103E | 3W | COB LED | Aluminium



10103E | 3W | COB LED | Aluminium



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆	📦	Notes
10103E/W/W/W	White	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/B/W	White	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/BS/W	White	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/B/W	Black	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/BS/W	Black	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver

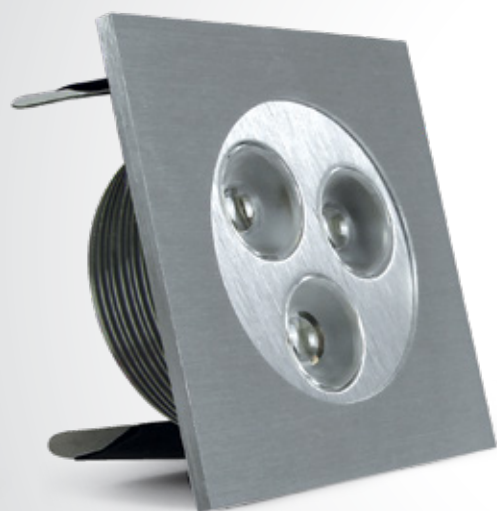

50103L/D/35



50401L/D/35



50601L/D/35

Fixed Spots



50103L | 3x1W | LED | Natural aluminium




IP20
offer

2
YEAR



Suitable for 89004 driver.




50401L | 4x1W | LED | Natural aluminium



IP20
offer

2
YEAR




50601L | 6x1W | LED | Natural aluminium



IP20
offer

2
YEAR

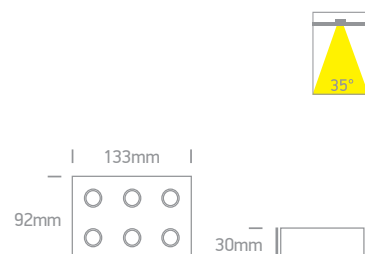


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡/⚡	⏏	📦	Notes
50103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50401L/D/35	Aluminium	Daylight	6000K	4x1W	240lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50401L/W/35	Aluminium	Warm white	3000K	4x1W	180lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50601L/D/35	Aluminium	Daylight	6000K	6x1W	360lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver
50601L/W/35	Aluminium	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver

3W LED Glass Lens Aluminium




10103N | 3x1W | LED | Aluminium



IP20
offer

2
YEAR




10103N | 3x1W | LED | Aluminium




IP20
offer

2
YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️	📦	Notes
10103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver

The 8W Range

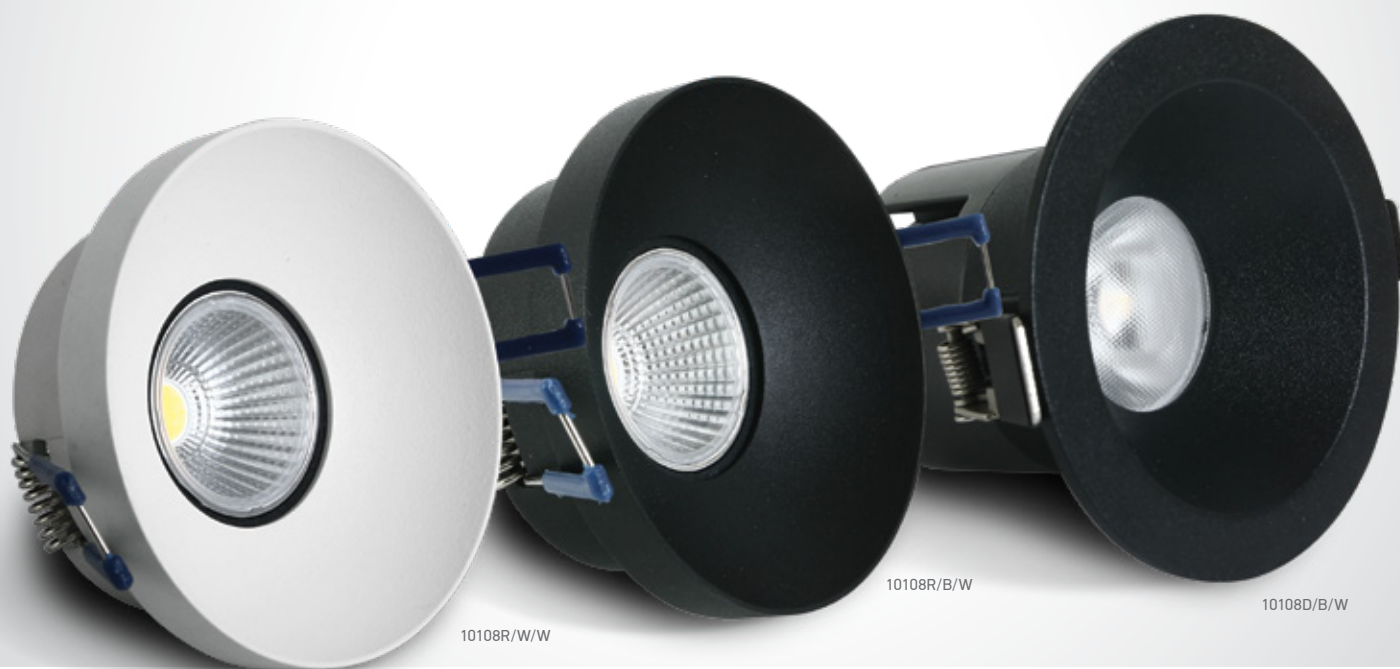


10108D | 8W | COB LED | Die cast



10108D | 8W | COB LED | Die cast



10108R | 8W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108D/W/W	White	Warm white	3000K	8W	600lm	36°	230V		73mm	90mm	50	Complete with 300mA driver
10108D/B/W	Black	Warm white	3000K	8W	600lm	36°	230V		73mm	90mm	50	Complete with 300mA driver
10108R/W/W	White	Warm white	3000K	8W	750lm	60°	230V		68mm	50mm	50	Complete with 350mA driver
10108R/B/W	Black	Warm white	3000K	8W	750lm	60°	230V		68mm	50mm	50	Complete with 350mA driver




The 8W Asymmetric Range



10108A | 8W | COB LED | Die cast | Asymmetric reflector




50108A | 8W | COB LED | Die cast | Asymmetric reflector



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		68mm	85mm	20	Complete with 350mA driver
50108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		73x73mm	85mm	50	Complete with 350mA driver



The Dark Light Range

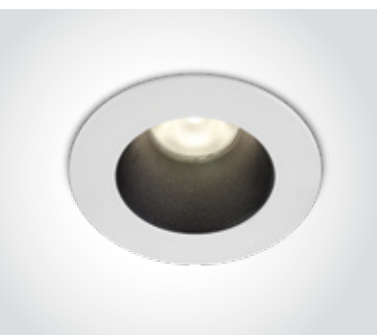

10108D1 | 8W | COB LED | Die cast



LED
BUILT IN

80
CRI

CE

3
YEAR

**DARK
LIGHT**
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108D1/W/W	White	Warm white	3000K	8W	560lm	36°	230V		-	73mm	105mm	50	Complete with 300mA driver

The Mix & Match Range



10112HA | 12W | COB LED | Die cast

GU10 version on page 13.




DARK LIGHT
IP20



10112HA/W/W



10112HA/B/W

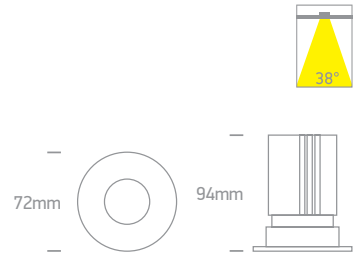

050182 | Rings for 10112HA | Aluminium



IP20




050182/W White



050182/B Black



050182/BS Brass



050182R | Round base for 10112HA | Aluminium



IP20




050182R/W White



050182R/B Black



050182R/BS Brass



050182RA | Square base for 10112HA | Aluminium



IP20




050182RA/W White



050182RA/B Black



050182RA/BS Brass



050182RB | Double Square base for 10112HA | Aluminium



IP20




050182RB/W White



050182RB/B Black



050182RB/BS Brass




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	💡	📏	📦	Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver

The 7W Dark Light Range


Die cast



10107DC | 7W | COB LED | Die cast



10107DC | 7W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆	📦	Notes
10107DC/W/W	White	Warm white	3000K	7W	560lm	50°	230V	□	15cm	55mm	110mm	50	Complete with 300mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V	□	15cm	55mm	110mm	50	Complete with 300mA driver



10112TD/W/C

10112TD/B/W



The 12W Dark Light Range

Die cast




10112TD/W/W

10112TD | 12W | COB LED | Die cast

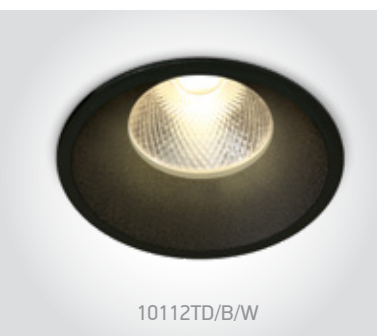

10112TD/B/W

10112TD | 12W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10112TD/W/C	White	Cool white	4000K	12W	960lm	20°	230V	□	82mm	100mm	50	Complete with 300mA driver
10112TD/W/W	White	Warm white	3000K	12W	960lm	20°	230V	□	82mm	100mm	50	Complete with 300mA driver
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V	□	82mm	100mm	50	Complete with 300mA driver

The Dark Light Pro Range

Aluminium






The Dark Light Pro Range Aluminium


10105FD | 5W | COB LED | Aluminium



10105FD/B/W




10105FD/W/W




10110FD | 10W | COB LED | Aluminium




10110FD/B/W




10110FD/W/W




10115FD | 15W | COB LED | Aluminium



10115FD/B/W



10115FD/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10105FD/W/W	White	Warm white	3000K	5W	300lm	24°	230V	□	50mm	120mm	50	Complete with 300mA driver
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V	□	50mm	120mm	50	Complete with 300mA driver
10110FD/W/W	White	Warm white	3000K	10W	800lm	24°	230V	□	68mm	130mm	50	Complete with 300mA driver
10110FD/B/W	Black	Warm white	3000K	10W	800lm	24°	230V	□	68mm	130mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V	□	82mm	150mm	20	Complete with 350mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V	□	82mm	150mm	20	Complete with 350mA driver



The Retro Dark Light Range



10107Z/B/W



10112Z/W/W



10120Z/B/W

The Retro Dark Light Range



10107Z/B/W

10112Z/B/W

10120Z/W/W



10107Z/W/W


10107Z | 7W | COB LED | Die cast + plastic



10107Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378A/W.

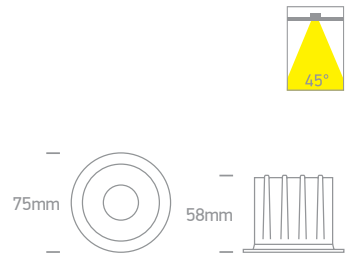

10112Z/W/W


10112Z | 12W | COB LED | Die cast + plastic



10112Z/B/W



Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.

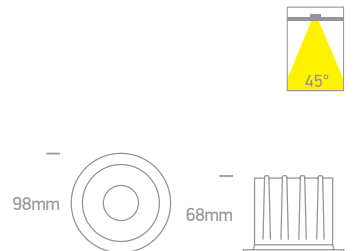

10120Z/W/W


10120Z | 20W | COB LED | Die cast + plastic



10120Z/B/W




Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.

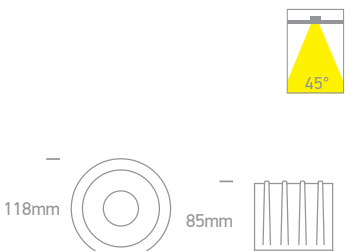

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	H	Box	Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver



The COB LED Dark Light Range

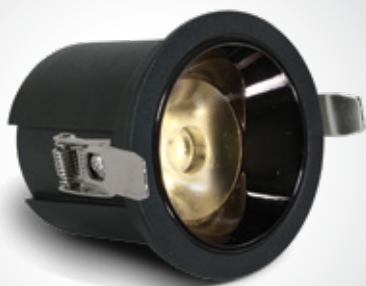

10106DC/B/W



10112DC/B/W



10118DC/B/W




The COB LED Dark Light Range

10106DC | 6W | COB LED | Die cast




10106DC/B/W



10106DC/W/W





Suitable for 89008 driver.

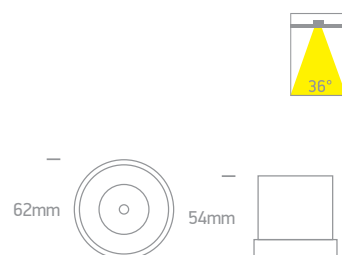

10112DC | 12W | COB LED | Die cast




10112DC/B/W



10112DC/W/W





Suitable for 89015A driver.

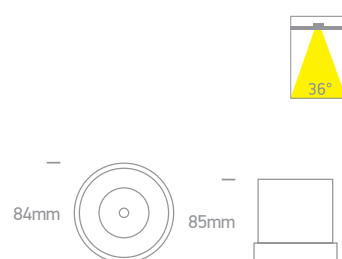

10118DC | 18W | COB LED | Die cast




10118DC/B/W



10118DC/W/W




Suitable for 89030C driver.

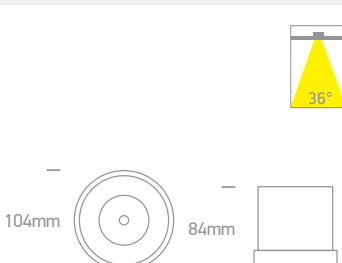




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10106DC/W/W	White	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10106DC/B/W	Black	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10112DC/W/W	White	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10112DC/B/W	Black	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10118DC/W/W	White	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver
10118DC/B/W	Black	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver





The Mirror Dark Light Range

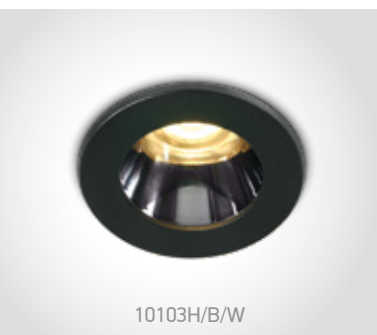

10103H | 3W | SMD 3535 | Aluminium

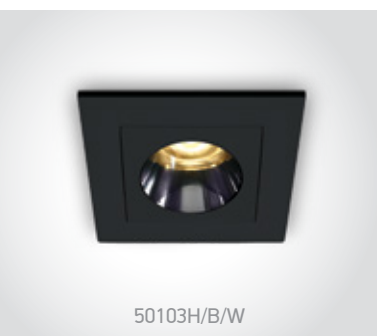

50103H | 3W | SMD 3535 | Aluminium






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/🔧	⬆️/⬆️	📦	Notes
10103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	□	35mm	70mm	60	Complete with 700mA driver
10103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	□	35mm	70mm	60	Complete with 700mA driver
50103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V	□	38x38mm	70mm	60	Complete with 700mA driver
50103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V	□	38x38mm	70mm	60	Complete with 700mA driver





The Mirror Dark Light Range





10110H | 10W | SMD 3535 | Aluminium

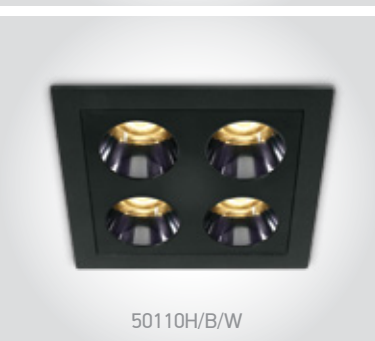

50110H | 10W | SMD 3535 | Aluminium



50012H | 12W | SMD 3535 | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀/4	⌈⌋	📦	Notes
10110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	75mm	60mm	40	Complete with 700mA driver
10110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V	□	75mm	60mm	40	Complete with 700mA driver
50110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	68x68mm	60mm	40	Complete with 700mA driver
50110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V	□	68x68mm	60mm	40	Complete with 700mA driver
50012H/W/W	White	Warm white	3000K	12W	840lm	38°	230V	□	140x36mm	80mm	40	Complete with 700mA driver
50012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V	□	140x36mm	80mm	40	Complete with 700mA driver


The Honeycomb Dark Light Range


10106DH | 6W | COB LED | Die cast

Complete with honeycomb.




Suitable for 89008 driver.


10112DH | 12W | COB LED | Die cast


Complete with honeycomb.




Suitable for 89015A driver.


10118DH | 18W | COB LED | Die cast

Complete with honeycomb.



Suitable for 89030C driver.

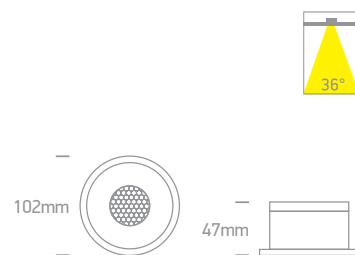

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚙	⏏	📦	Notes
10106DH/W/W	White	Warm white	3000K	6W	500lm	36°	350mA	III	40cm	63mm	60mm	50	Requires 350mA driver
10112DH/W/W	White	Warm white	3000K	12W	1000lm	36°	700mA	III	40cm	72mm	60mm	50	Requires 700mA driver
10118DH/W/W	White	Warm white	3000K	18W	1500lm	36°	500mA	III	40cm	91mm	70mm	30	Requires 500mA driver




The Round Mirror Range


10106X | 6W | SMD 3030 | Aluminium



10106X/B/W




10106X/W/W




10112X | 12W | SMD 3030 | Aluminium



10112X/B/W



10112X/W/W




10120X | 20W | SMD 3030 | Aluminium



10120X/B/W



10120X/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	↕	📦	Notes
10106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V	⚡	75mm	60mm	40	Complete with 150mA driver
10106X/B/W	Black	Warm white	3000K	6W	480lm	38°	230V	⚡	75mm	60mm	40	Complete with 150mA driver
10112X/W/W	White	Warm white	3000K	12W	960lm	38°	230V	⚡	100mm	50mm	40	Complete with 300mA driver
10112X/B/W	Black	Warm white	3000K	12W	960lm	38°	230V	⚡	100mm	50mm	40	Complete with 300mA driver
10120X/W/W	White	Warm white	3000K	20W	1600lm	38°	230V	⚡	116mm	50mm	30	Complete with 450mA driver
10120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V	⚡	116mm	50mm	30	Complete with 450mA driver




The COB Dark Light Range Interchangeable Reflector

10107K | 6,5W | COB LED | Aluminium

Ring must be ordered separately.



10107K/W/W + 050104/B



10107K/B/W + 050104/BS



050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver




10112K/W/W + 050280/B

10112K/B/W + 050280/W

10107K/W/W + 050104/B

10107K/B/W + 050104/BS




The COB Dark Light Range Interchangeable Reflector

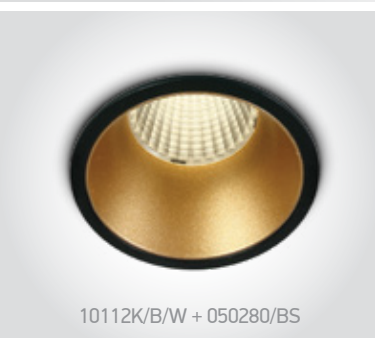

10112K/B/W + 050280/BS

10112K | 12W | COB LED | Die cast



Reflector must be ordered separately.

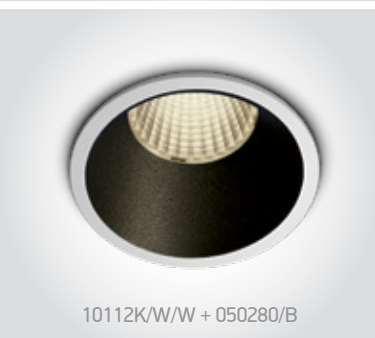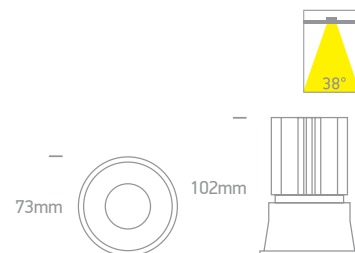


10112K/W/W + 050280/B

10112K | 12W | COB LED | Die cast


Reflector must be ordered separately.

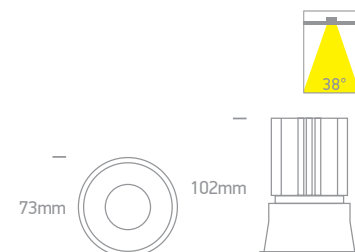

050280/W White

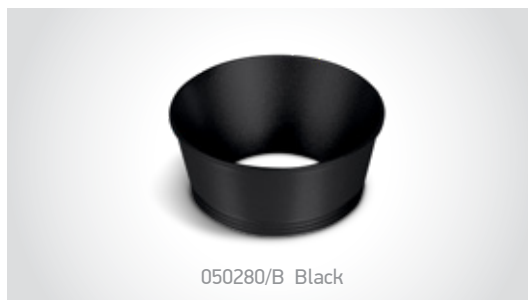

050280/B Black

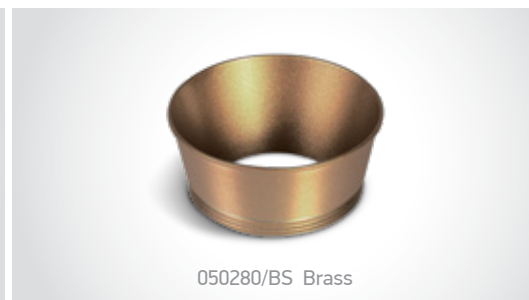

050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10112K/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/C	Black	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver



50106B/B/W



50306B/W/W

Mirror Square Boxes

Die cast





50106B/W/W



IP20




50106B/B/W




50306B/W/W



IP20



50306B/B/W

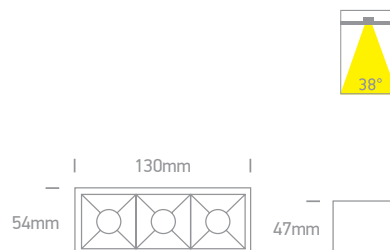


50406B/W/W



IP20



50406B/B/W



50406B | 16W | COB LED | Die cast

Adjustable version page 145.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Dimensions	Height	Weight	Notes
50106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V	□	50x45mm	70mm	50	Complete with 135mA driver
50106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V	□	50x45mm	70mm	50	Complete with 135mA driver
50306B/W/W	White	Warm white	3000K	12W	960lm	38°	230V	□	124x45mm	70mm	48	Complete with 300mA driver
50306B/B/W	Black	Warm white	3000K	12W	960lm	38°	230V	□	124x45mm	70mm	48	Complete with 300mA driver
50406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V	□	85x85mm	70mm	36	Complete with 400mA driver
50406B/B/W	Black	Warm white	3000K	16W	1280lm	38°	230V	□	85x85mm	70mm	36	Complete with 400mA driver



Mirror Square Boxes Die cast

50506B | 20W | COB LED | Die cast


Adjustable version page 145.




50506B/W/W



IP20



50506B/B/W




50006B | 40W | COB LED | Die cast




50006B/W/W



IP20



50006B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50006B/W/W	White	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver
50006B/B/W	Black	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver


Mini Shop Square Boxes

Die cast





50102B/W/W

50102B | 2W | LED | Die cast



IP20


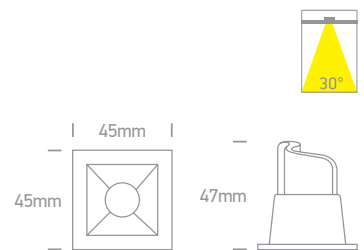


50102B/B/W

50102B | 2W | LED | Die cast




IP20

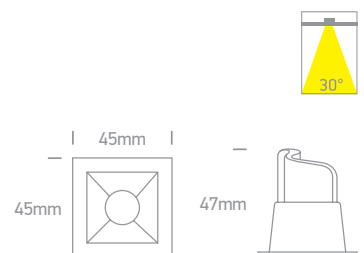


50202B/W/W

50202B | 2x2W | LED | Die cast




IP20

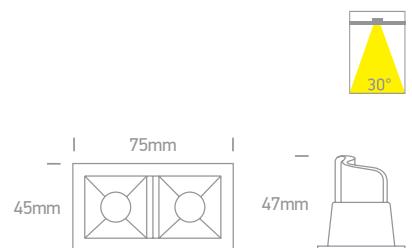


50202B/B/W

50202B | 2x2W | LED | Die cast



IP20

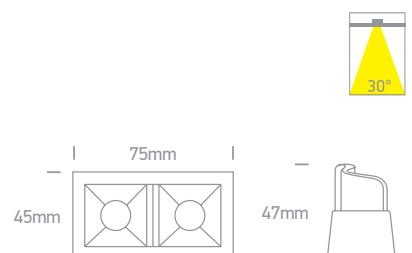

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89006PA driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89006PA driver

Mini Shop Square Boxes

Die cast



50902B/W/W

50502B/B/W

50302B | 3x2W | LED | Die cast




50302B/W/W


IP20



CE 3 YEAR



50302B/B/W



50502B | 5x2W | LED | Die cast



50502B/W/W


IP20



CE 3 YEAR



50502B/B/W



50902B | 10x2W | LED | Die cast



50902B/W/W

IP20



CE 3 YEAR



50902B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	T	↕	📦	Notes
50302B/W/W	White	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50302B/B/W	Black	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50502B/W/W	White	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50502B/B/W	Black	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50902B/W/W	White	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver
50902B/B/W	Black	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver



50307B/W/W




50107B/W/W

Medium Shop Square Boxes

50107B | 6,5W | COB LED | Aluminium + steel




IP20



50207B | 2x6,5W | COB LED | Aluminium + steel




IP20

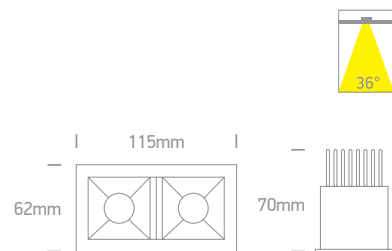

50307B | 3x6,5W | COB LED | Aluminium + steel




IP20

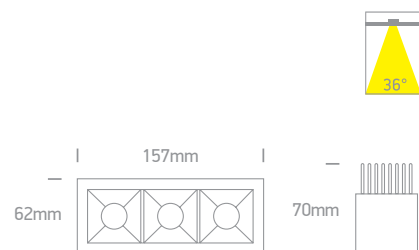

50507B | 5x6,5W | COB LED | Aluminium + steel



IP20

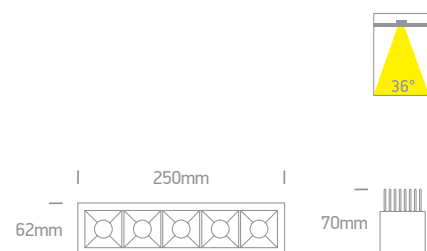



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA	III	40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA	III	40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA	III	40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA	III	40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers




Dark Light Tubes



50406C | 10W | SMD 3535 | Die cast




50906C | 22W | SMD 3535 | Die cast




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50906C/W/W	White	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver


The COB IP54 Range

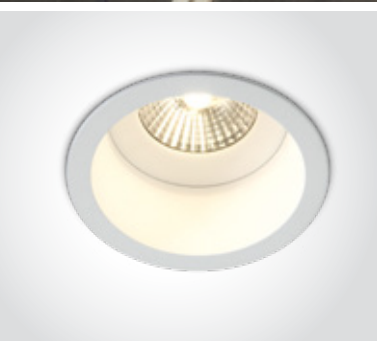

10107WD | 6,5W | COB LED | Die cast



10107M | 7W | COB LED | Die cast




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆	📦	Notes
10107WD/W/C	White	Cool white	4000K	6,5W	600lm	36°	700mA	⚡	40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	⚡	40cm	75mm	110mm	50	Requires 700mA driver
10107M/W/W	White	Warm white	3000K	7W	490lm	40°	230V	📦	-	68mm	80mm	50	Complete with 300mA driver

The COB IP54 Dark Light Range



10108H/W/W

10108H | 8W | COB LED | Die cast




10108H/B/W

10108H | 8W | COB LED | Die cast




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108H/W/W	White	Warm white	3000K	8W	625lm	36°	230V		-	75mm	70mm	50	Complete with 200mA driver
10108H/B/W	Black	Warm white	3000K	8W	625lm	36°	230V		-	75mm	70mm	50	Complete with 200mA driver

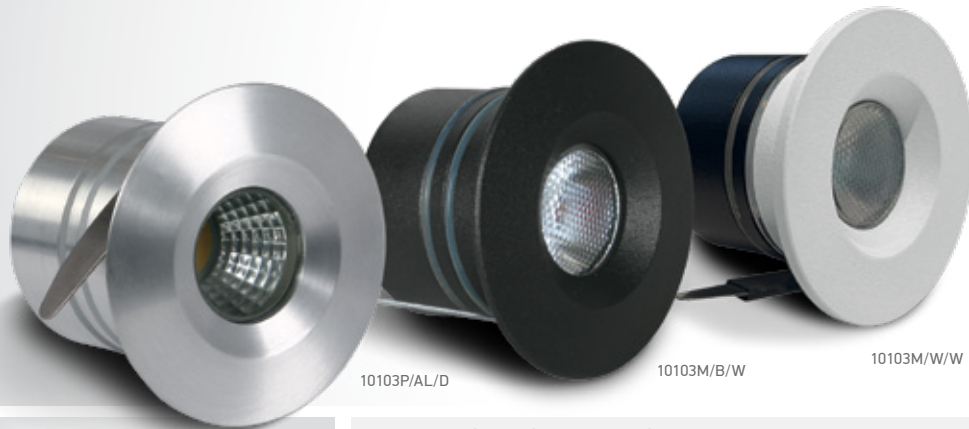


The IP65 Mini Range

10103M | 3W | SMD 3535 | Aluminium




IP65




10103M/W/W



Suitable for 89004A driver.



10103M | 3W | SMD 3535 | Aluminium




IP65



10103M/B/W



Suitable for 89004A driver.



10103M | 3W | SMD 3535 | Aluminium




IP65



10103M/AL/W



Suitable for 89004A driver.



10103P | 1W/3W | COB LED | Aluminium


1W@350mA / 3W@700mA



IP65




Suitable for 89004A driver.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	💡	📏	📦	Notes
10103M/W/C	White	Cool white	4000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/W	White	Warm white	3000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/B/W	Black	Warm white	3000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/AL/W	Aluminium	Warm white	3000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103P/AL/D	Aluminium	Daylight	6000K	1W/3W	210lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver

The IP65 Project Range Aluminium


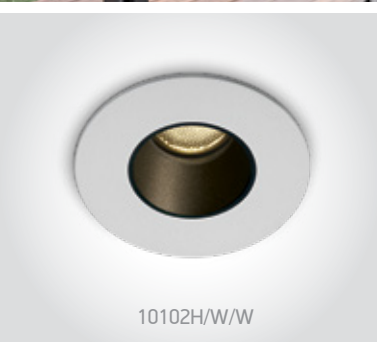


10102H | 2W | LED | Aluminium



Driver can not pass through the cut-out hole.

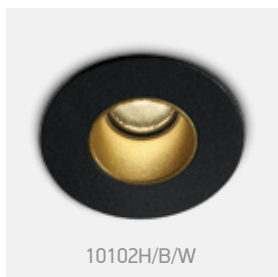

10107DL | 6,5W | COB LED | Aluminium




10107H | 6,5W | COB LED | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆	📦	Notes
10102H/W/C	White	Cool white	4000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10107DL/W/W	White	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	42mm	90mm	50	Requires 700mA driver
10107H/W/C	White	Cool white	4000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver
10107H/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver



The 6,5W COB IP65 Range

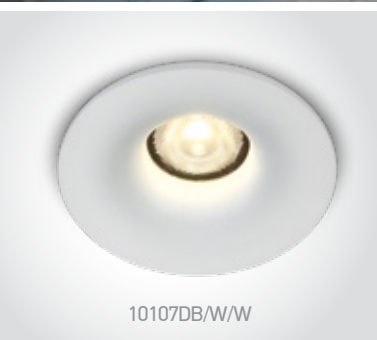

10107DB | 6,5W | COB LED | Aluminium

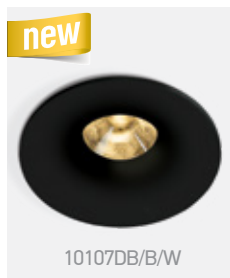

10107WP | 6,5W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	💡	📏	📦	Notes
10107DB/W/W	White	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/B/W	Black	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107WP/W/W	White	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver
10107WP/B/W	Black	Warm white	3000K	6,5W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver

10112P/B/W



10112P/W/W

The 12W COB IP65 & IP64 Range




10112P/W/W

10112P | 12W | COB LED | Die cast

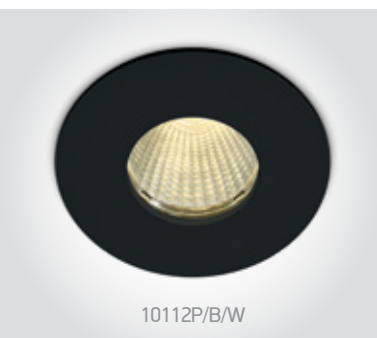



10112P/B/W

10112P | 12W | COB LED | Die cast



10112P/AL/W

10112P | 12W | COB LED | Natural aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10112P/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver





The 12W COB IP65


10112C | 12W | COB LED | Die cast




new




10112TP | 12W | COB LED | Die cast



10112TP | 12W | COB LED | Die cast



10110P | 12W | COB LED | Die cast




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	🔧	⬆	📦	Notes
10112C/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	120mm	50	Requires 700mA driver
10112C/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	120mm	50	Requires 700mA driver
10112TP/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10110P/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	48	Requires 700mA driver
10110P/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	48	Requires 700mA driver


Floating Ring Range




10112R | 12W | COB LED | Aluminium




10112R/W/W + 050162/B



10112R | 12W | COB LED | Aluminium



10112R/B/W + 050162/W



050162/W White





050162/B Black

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class						Notes
10112R/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA		40cm	68mm	110mm	80mm	50	Requires 700mA driver
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA		40cm	68mm	110mm	80mm	50	Requires 700mA driver



The IP65 Range




10106V | 6W | COB LED | Die cast + glass




10103NP | 3x1W | LED | Natural aluminium



10106P | 6W | SMD 2835 | Dimmable | Plastic



10106P | 6W | SMD 2835 | Dimmable | Plastic



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	💡	⬆️	📦	Notes
10106V/W/W	White	Warm white	3000K	6W	460lm	25°	100-240V	Ⓢ	-	94mm	100mm	12	Complete with 500mA driver
10106V/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V	Ⓢ	-	94mm	100mm	12	Complete with 500mA driver
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	⚡	200cm	70mm	70mm	50	Requires 350mA driver
10106P/W/C	White	Cool white	4000K	6W	570lm	100°	230V	Ⓢ	-	67mm	70mm	48	Complete with dimmable driver
10106P/W/W	White	Warm white	3000K	6W	570lm	100°	230V	Ⓢ	-	67mm	70mm	48	Complete with dimmable driver

one



The IP65 CCT V



10107PV | 7W | SMD 2835 | Dimmable | Plastic



LED
BUILT IN

85
CRI

TRIAC
DIMMABLE

CCT V

CE


3
YEAR

IP65




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
10107PV/W/V	White	CCT V	2700K-3000K-4000K	7W	600lm	38°	230V	□	30cm	72mm	40mm	48	AC LED

The Fire Rated IP65 Range

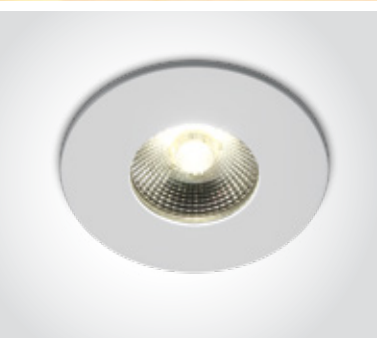

10106PF | 6W | COB LED | Fire Rated | Die cast


Ring must be ordered separately.



IP65



Dimensions are complete with the ring.



050042/W White



050042/B Black



050042/C Chrome

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⏏	📦	Notes
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver

The Fire Rated IP65 Range




10107DF/W + 050178/B

10106PF/W + 050042/C




10107DF | 7W | SMD LED | Fire Rated | Metal + plastic

Complete with white ring.

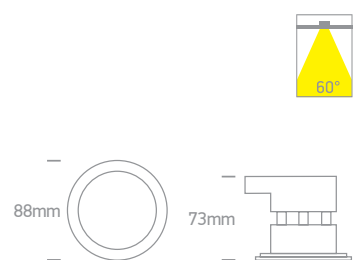

10107DFV | 7W | SMD LED | Fire Rated | Metal + plastic

Complete with white ring.

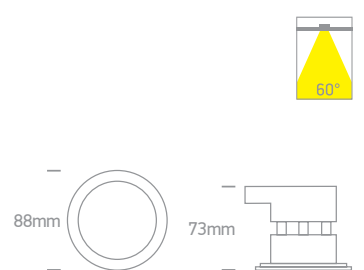

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	↑↓	📦	Notes
10107DF/W	White	Warm white	3000K	7W	500lm	60°	230V	⊕	65mm	80mm	36	Complete with dimmable driver
10107DFV/W/V	White	CCT V	2700K-3000K-4000K	7W	510lm	60°	230V	⊞	65mm	80mm	36	Complete with dimmable driver



10101C/C/D



50101/AL/D

LED Spots



10101C | 1W | LED | Cabinet light | Steel




IP20
offer



50101 | 9x0,2W | LED | Natural aluminium




IP20
offer



50101 | 9x0,2W | LED | Natural aluminium



IP20
offer




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10101C/C/D	Chrome	Daylight	6000K	1W	50lm	90°	12V AC	⚡	30cm	50mm	25mm	100	Requires 12V AC transformer
50101/AL/D	Aluminium	Daylight	6000K	9x0,2W	60lm	90°	230V	⚡	-	60mm	40mm	50	Complete with driver
50101/AL/BL	Aluminium	Blue	-	9x0,2W	-	90°	230V	⚡	-	60mm	40mm	50	Complete with driver

LED Spots




10106G | 6W | LED | Acrylic

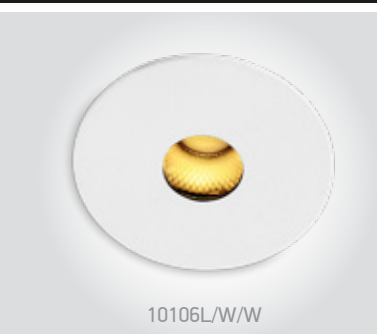


10106L | 6W | LED | Aluminium

Use driver 89006P.

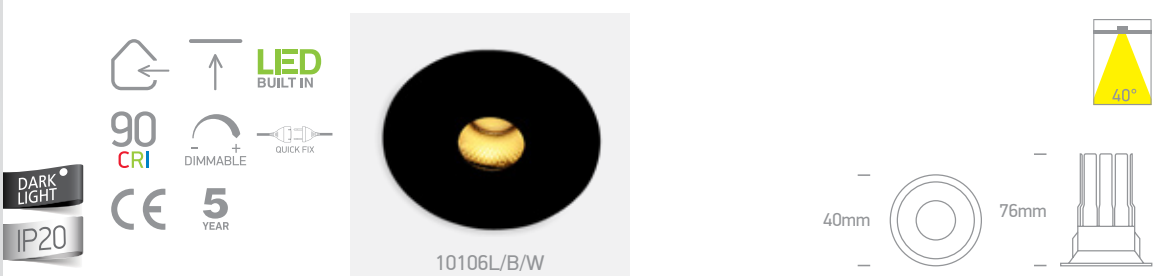

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️	📦	Notes
10106G/D	Clear	Daylight	6000K	6W	295lm	-	350mA	III	40cm	100mm	60mm	32	Requires 350mA driver
10106L/W/W	White	Warm white	3000K	6W	360lm	40°	350mA	III	40cm	33mm	80mm	50	Requires 350mA driver
10106L/B/W	Black	Warm white	3000K	6W	360lm	40°	350mA	III	40cm	33mm	80mm	50	Requires 350mA driver

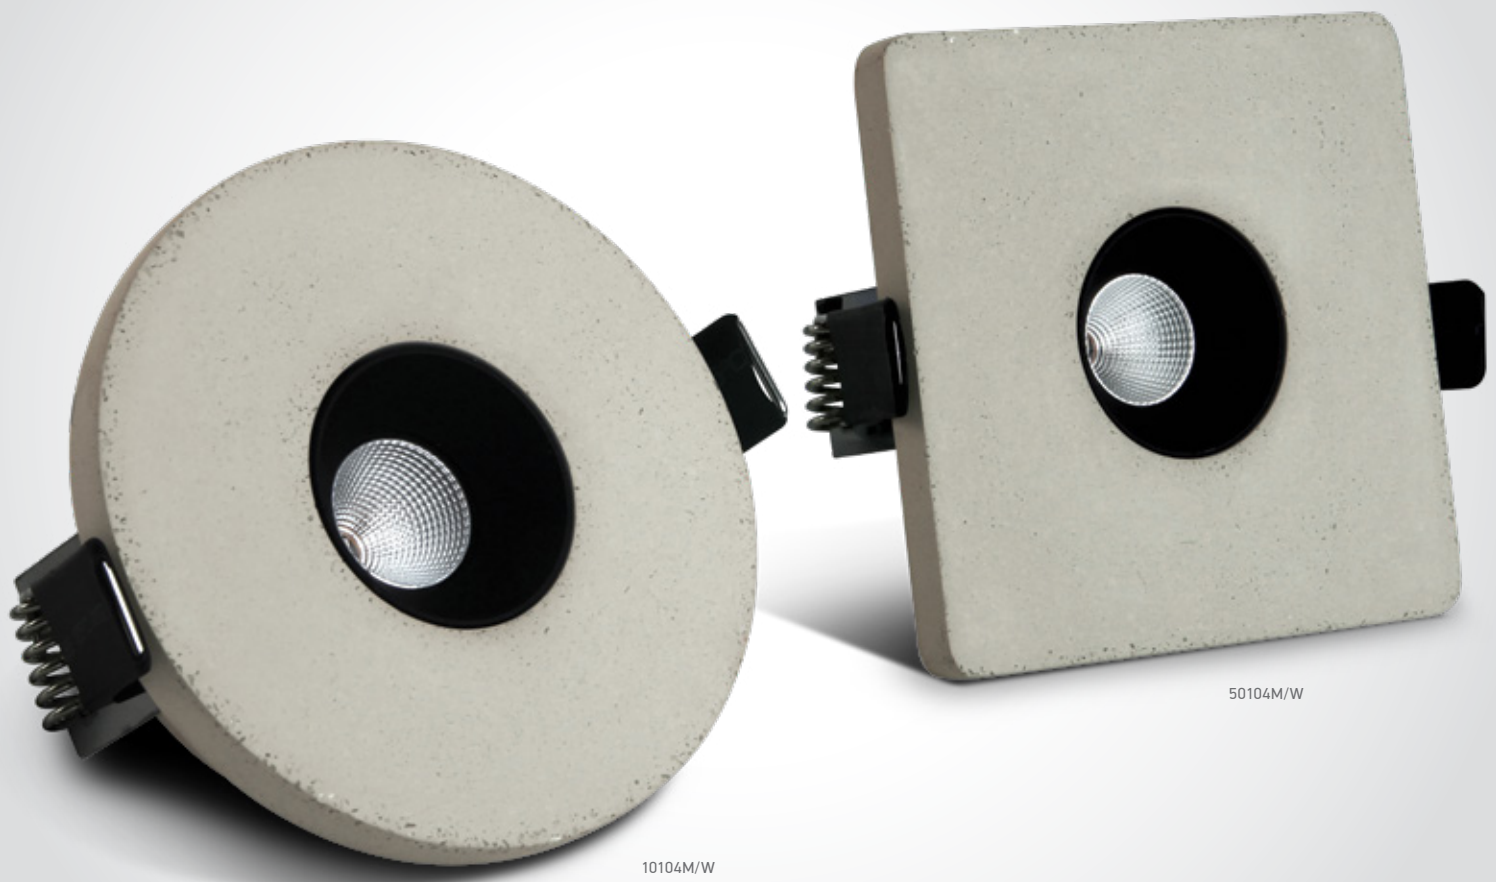


10104M/W

50104M/W


The Cement Look Recessed Black Reflector



10104M | 4,5W | COB LED | Cement + black reflector

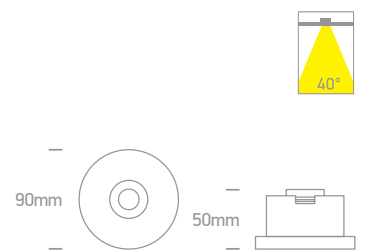

50104M | 4,5W | COB LED | Cement + black reflector

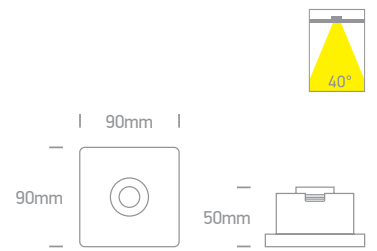


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver
50104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver

The LED Decorative Range



10103A | 3x1W + 18 SMD LED Ring | LED | Natural aluminium + PC


Colours can be switched separately.



2
YEAR



10108J | 8W | COB + SMD 4014 | Die cast

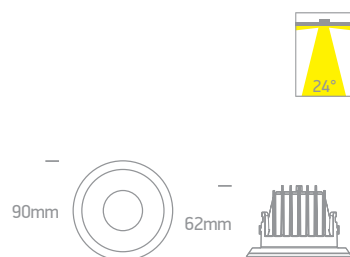

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	U	W	Box	Notes
10103A/W/D	Aluminium	Warm white+Daylight	3000K+6000K	3/1,8W	-	-	350mA	II	40cm	77mm	50mm	100	Requires 2x350mA drivers
10108J/W/W	White	Warm white	3000K	8W	560lm	24°	230V	I	-	70mm	100mm	30	Complete with 200mA driver




10103BTR/BS/W

10103BTR/B/W




10103BTR/W/W

The Trimless 3W Range Aluminium

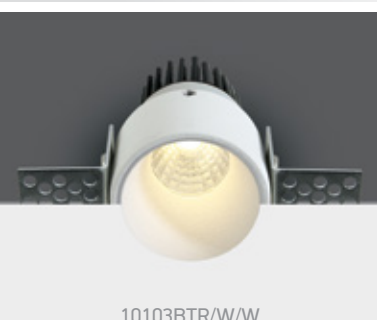




10103BTR/W/W

10103BTR | 3W | COB LED | Trimless | Aluminium




10103BTR/B/W

10103BTR | 3W | COB LED | Trimless | Aluminium

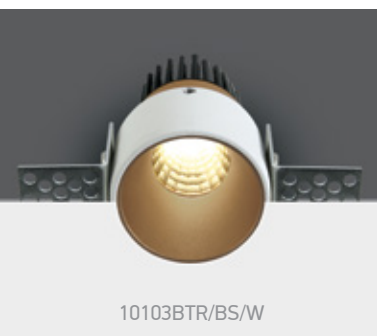

10103BTR/BS/W

10103BTR | 3W | COB LED | Trimless | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	Ⓜ	Ⓜ	Ⓜ	Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	Ⅲ	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA	Ⅲ	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA	Ⅲ	40cm	42mm	80mm	100	Requires 350mA driver




10107BT/B/W

10107BT/W/W


The Trimless 7W Range



10107BT | 6,5W | COB LED | Trimless | Die cast

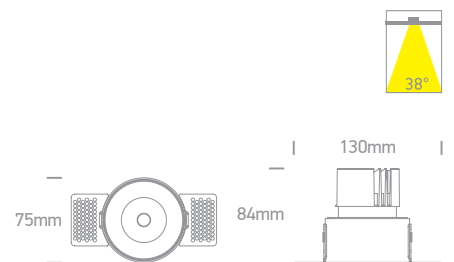

10107BT | 6,5W | COB LED | Trimless | Die cast

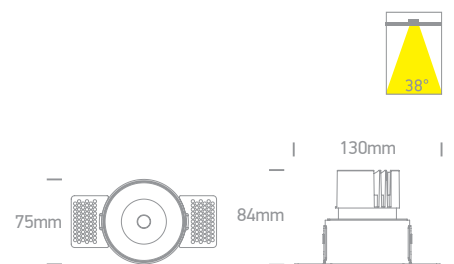


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10107BT/W/W	White	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver
10107BT/B/W	Black	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver



The Trimless 12W Range Aluminium




10112BTR | 12W | COB LED | Trimless | Aluminium



10112BTR | 12W | COB LED | Trimless | Aluminium

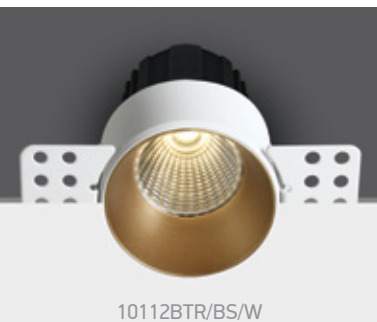


10112BTR | 12W | COB LED | Trimless | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	h	W	Box	Notes
10112BTR/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/BS/W	Brass	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver



Trimless Dark Light Tubes

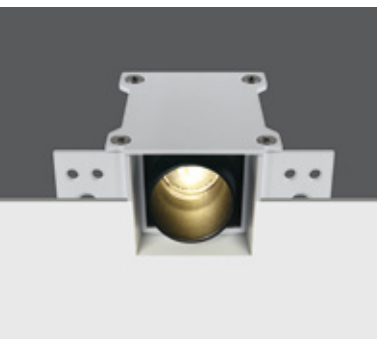



50103ATR | 3W | SMD 3535 | Trimless | Die cast

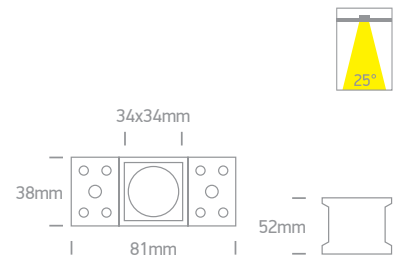

50203ATR | 6W | SMD 3535 | Trimless | Die cast

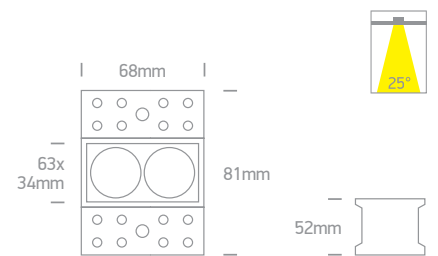



50403ATR | 10W | SMD 3535 | Trimless | Die cast

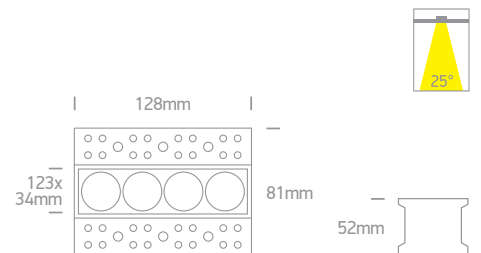


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50103ATR/B/W	Black	Warm white	3000K	3W	200lm	25°	230V		50x38mm	70mm	50	Complete with 700mA driver
50203ATR/B/W	Black	Warm white	3000K	6W	480lm	25°	230V		68x50mm	70mm	50	Complete with 700mA driver
50403ATR/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		128x50mm	70mm	20	Complete with 700mA driver

The Trimless Mirror Range Aluminium

10106XTR | 6W | SMD 3030 | Trimless | Aluminium

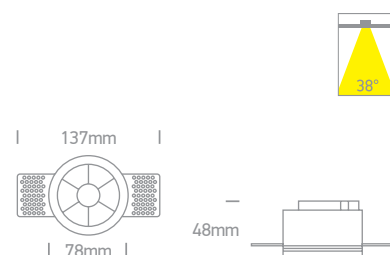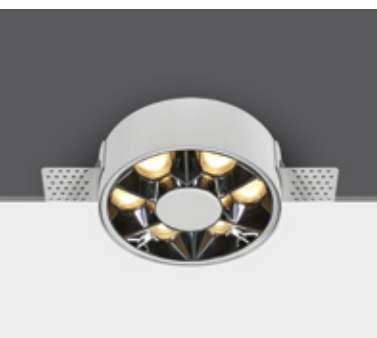

10112XTR | 12W | SMD 3030 | Trimless | Aluminium

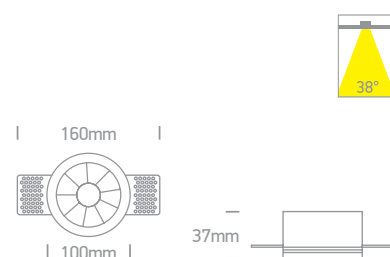

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106XTR/W/W	White	Warm white	3000K	6W	480lm	38°	230V	⚡	78mm	70mm	40	Complete with 150mA driver
10112XTR/W/W	White	Warm white	3000K	12W	960lm	38°	230V	⚡	100mm	60mm	40	Complete with 300mA driver





50110HTR/W/W






50012HTR/W/W

The Trimless Mirror Range Aluminium


10110HTR | 10W | SMD 3535 | Trimless | Aluminium

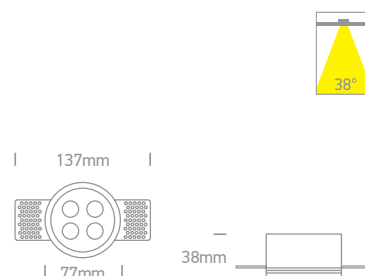



50110HTR | 10W | SMD 3535 | Trimless | Aluminium

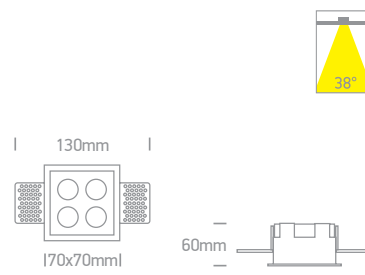

50012HTR | 12W | SMD 3535 | Trimless | Aluminium

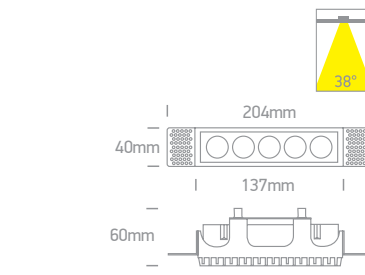

50024HTR | 24W | SMD 3535 | Trimless | Aluminium

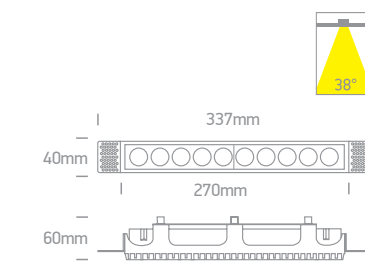

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/🔧	📏	📦	Notes
10110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	78mm	80mm	40	Complete with 700mA driver
50110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V	□	72x72mm	100mm	40	Complete with 700mA driver
50012HTR/W/W	White	Warm white	3000K	12W	840lm	38°	230V	□	145x41mm	100mm	40	Complete with 700mA driver
50024HTR/W/W	White	Warm white	3000K	24W	1700lm	38°	230V	□	278x41mm	100mm	20	Complete with 700mA driver