



Downlights Fixed LED

Pages 163-204

06



The 3-12W Round Recessed Panels

Die cast



10103FA | 3W | SMD LED | Die cast



IP40



super slim.



10108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 89008UT.




10108FA/W/W

IP40



10108FA/B/W



10112FA | 12W | SMD LED | Die cast

Optional dimmable driver code 89016UT.




10112FA/W/W

IP40



10112FA/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/C	White	Cool white	4000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/C	Black	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/W	Black	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10112FA/W/C	White	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/W/W	White	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver

The 18-30W Round Recessed Panels

Die cast



10112FA/W/W



10118FA/B/W



10118FA/W/W

10118FA | 18W | SMD LED | Die cast


Optional dimmable driver code 89024UT.




IP40



10118FA/B/W



10118FA/G/W



10130FA/W/C

10130FA | 30W | SMD LED | Die cast


Optional dimmable driver code 89030UT.



IP40



10130FA/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/D	White	Daylight	6000K	18W	1260lm	120°	230V	□	210mm	50mm	20	Complete with 450mA driver
10118FA/W/C	White	Cool white	4000K	18W	1260lm	120°	230V	□	210mm	50mm	20	Complete with 450mA driver
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V	□	210mm	50mm	20	Complete with 450mA driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V	□	210mm	50mm	20	Complete with 450mA driver
10118FA/G/W	Grey	Warm white	3000K	18W	1080lm	120°	230V	□	210mm	50mm	20	Complete with 450mA driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V	□	285mm	50mm	15	Complete with 700mA driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V	□	285mm	50mm	15	Complete with 700mA driver

The 3-12W Round Recessed Panels

CCT V



10103FA/W/V


10103FA | 3W | SMD 2835 | Die cast




new
IP20



10103FA/B/V



CCT Variable



10108FA/W/V


10108FA | 8W | SMD 2835 | Die cast




new
IP20



10108FA/B/V



CCT Variable



10112FA/W/V


10112FA | 12W | SMD 2835 | Die cast




new
IP20



10112FA/B/V



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10103FA/W/V	White	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V	□	70mm	50mm	30	Complete with 300mA driver
10103FA/B/V	Black	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V	□	70mm	50mm	30	Complete with 300mA driver
10108FA/W/V	White	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V	□	108mm	50mm	20	Complete with 200mA driver
10108FA/B/V	Black	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V	□	108mm	50mm	20	Complete with 200mA driver
10112FA/W/V	White	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V	□	155mm	50mm	20	Complete with 300mA driver
10112FA/B/V	Black	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V	□	155mm	50mm	20	Complete with 300mA driver

The 18W-30W Round Recessed Panels

CCT V



10118FA/W/V



10118FA/B/V



10118FA/W/V

10118FA | 18W | SMD 2835 | Die cast



new


IP20



10118FA/B/V



CCT Variable



10130FA/W/V

10130FA | 30W | SMD 2835 | Die cast



new


IP20



10130FA/B/V



CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/V	White	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10118FA/B/V	Black	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver
10130FA/B/V	Black	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver




50130FA/G/W

50130FA/W/C

The 16-30W Square Recessed Panels

Die cast


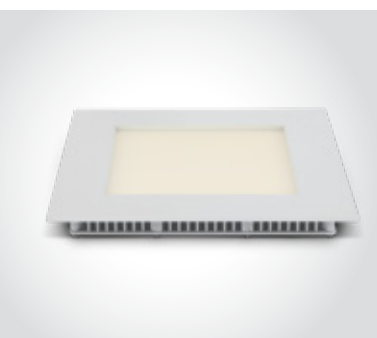


50116FA | 16W | SMD LED | Die cast

Optional dimmable driver code 89016UT.



IP40

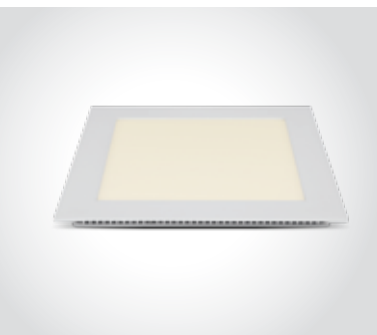



50122FA | 22W | SMD LED | Die cast

Optional dimmable driver code 89024UT.



IP40





50130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 89030UT.



IP40



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50116FA/W/C	White	Cool white	4000K	16W	1120lm	120°	230V		155x155mm	50mm	30	Complete with 350mA driver
50116FA/W/W	White	Warm white	3000K	16W	960lm	120°	230V		155x155mm	50mm	30	Complete with 350mA driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V		210x210mm	50mm	20	Complete with 500mA driver
50130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/G/W	Grey	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver

The 16-30W Square Recessed Panels


CCT V

50116FA | 16W | SMD LED | Die cast



new

IP20





50122FA | 22W | SMD LED | Die cast



new

IP20





50130FA | 30W | SMD LED | Die cast



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50116FA/W/V	White	CCT V	3000K-4000K-5700K	16W	1600lm	120°	230V		155X155mm	50mm	20	Complete with 400mA driver
50122FA/W/V	White	CCT V	3000K-4000K-5700K	22W	2200lm	120°	230V		210x210mm	50mm	16	Complete with 550mA driver
50130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3000lm	120°	230V		280x280mm	50mm	12	Complete with 800mA driver

The 40-48W Round Recessed Panels

Die cast




10140F | 40W | SMD LED | Die cast



IP40

super slim.



10148PE | 48W | SMD 2835 | 600mm | Die cast



IP20




Optional non-dimmable driver.
Order code 89048.



Optional TRIAC dimmable driver.
Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver.
Order code 89050TLD.



Driver must be ordered separately.




10148P | 48W | SMD 2835 | Die cast



IP20

offer

super slim.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10140F/W/C	White	Cool white	4000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10140F/W/W	White	Warm white	3000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA		585mm	80mm	4	Requires 1200mA driver
10148P/W/D	White	Daylight	6000K	48W	3200lm	120°	230V		585mm	80mm	2	Complete with 1200mA driver

The 40W Backlit Panel

600x600mm

50140B | 40W | SMD LED | 595x595mm | Aluminium + Steel

Backlit.



IP20




Optional suspension kit.
Order code 050017.



Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push to DIM driver.
Order code 89044L.



50140BU | 40W | SMD LED | 595x595mm | Aluminium + Steel | Microprismatic

Backlit.



IP20




Optional suspension kit.
Order code 050017.



Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push to DIM driver.
Order code 89044L.



50140BU/W/V | 40W | SMD LED | 595x595mm | Aluminium + steel | Microprismatic

Backlit.



IP20




Optional suspension kit.
Order code 050017.



Optional recessed kit (4pcs).
Order code 050108.





Optional DALI & Push to DIM driver.
Order code 89044L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↓↑	📦	Notes
50140B/W/D	White	Daylight	6000K	40W	4000lm	230V	□	50mm	4	Complete with 850mA driver
50140B/W/C	White	Cool white	4000K	40W	4000lm	230V	□	50mm	4	Complete with 850mA driver
50140B/W/W	White	Warm white	3000K	40W	4000lm	230V	□	50mm	4	Complete with 850mA driver
50140BU/W/C	White	Cool white	4000K	40W	4000lm	230V	□	60mm	6	Complete with 1000mA driver
50140BU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	□	60mm	4	Complete with 1000mA driver

Panels For Germany/Austria

620x620mm

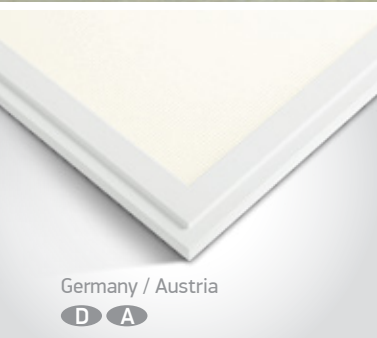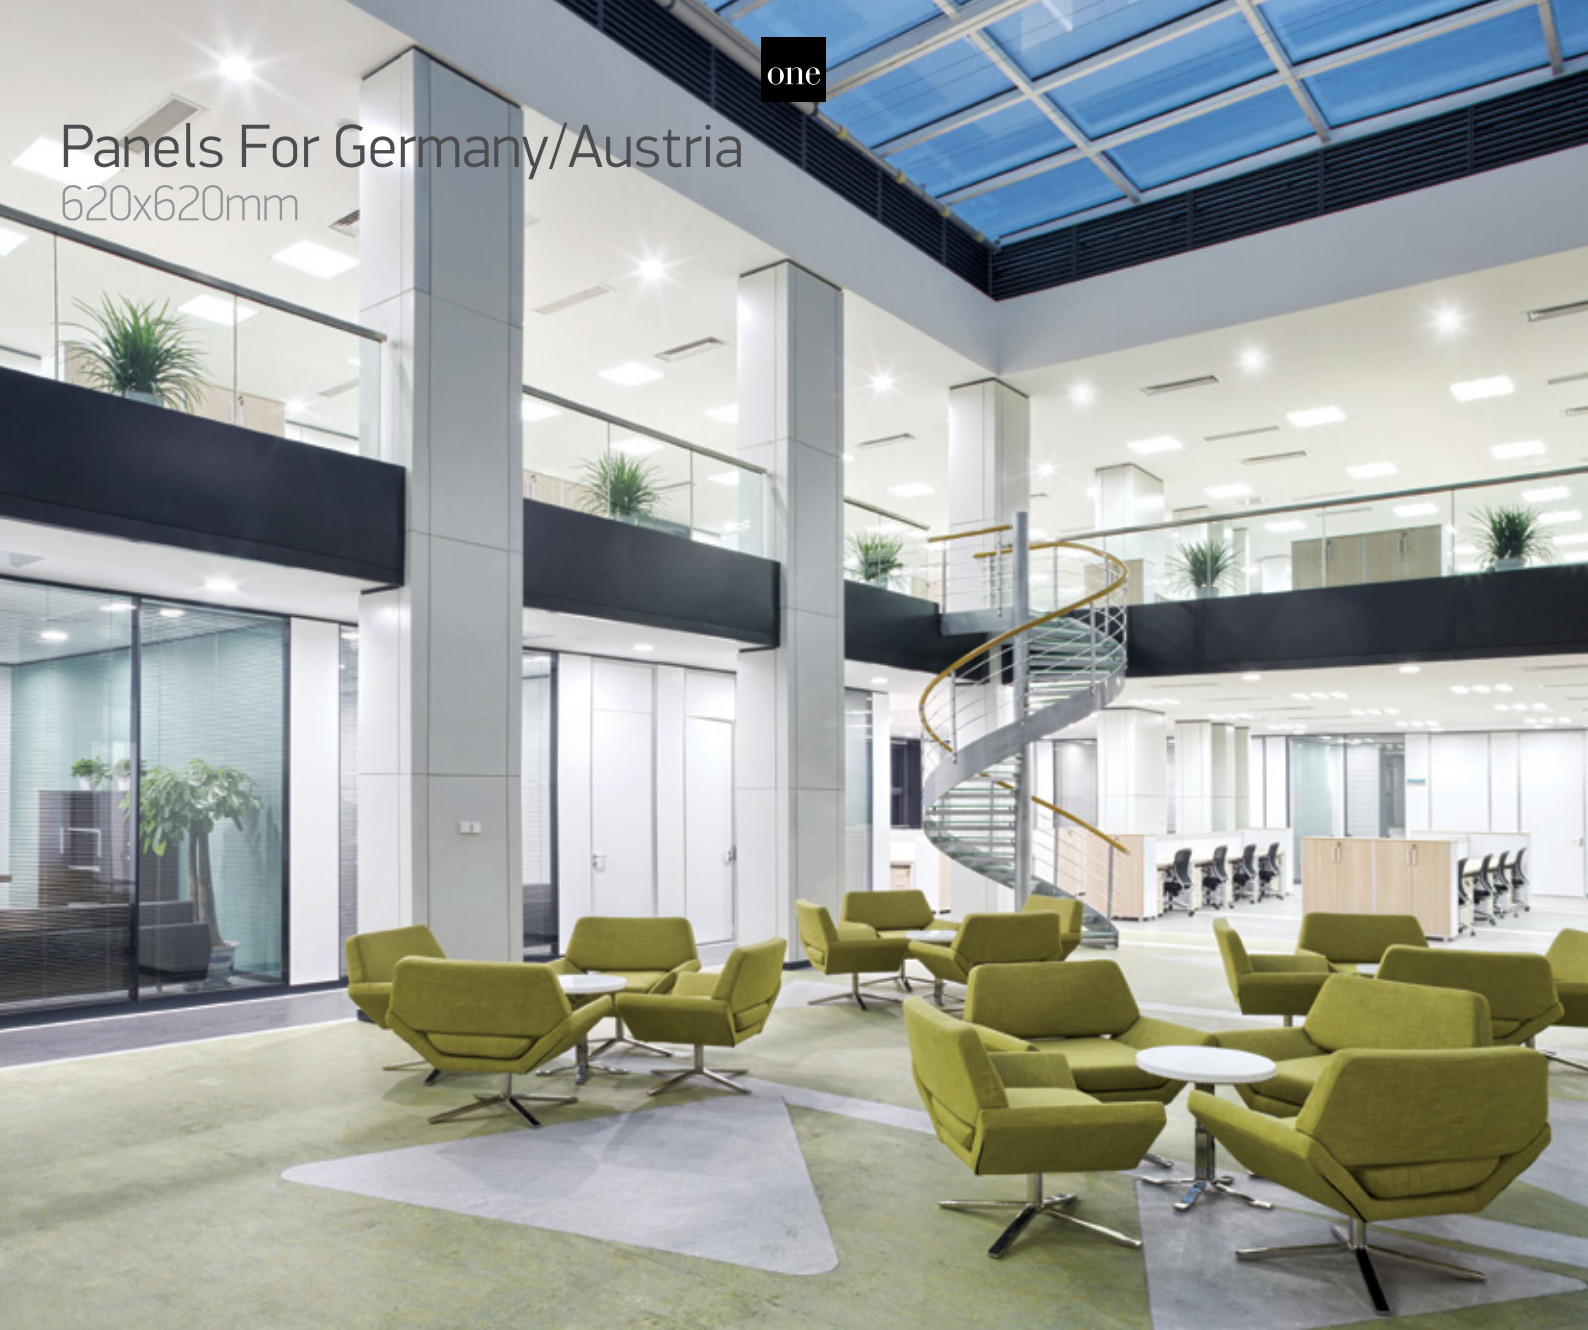

50148AU | 48W | SMD 2835 | 620x620mm | Aluminium | Microprismatic

Driver must be ordered separately.



Optional suspension kit.
Order code 050017.





Optional recessed kit (4pcs).
Order code 050108.



Optional non-dimmable driver.
Order code 89048.



Optional TRIAC dimmable driver.
Order code 89048T.

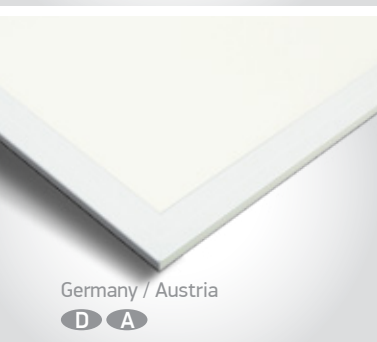

50140BAU | 40W | SMD 2835 | 620x620mm | Aluminium + Steel | Microprismatic

Backlit.




Optional suspension kit.
Order code 050017.



Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push to DIM driver.
Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↑↓	📦	Notes
50148AU/W/W	White	Warm white	3000K	48W	4000lm	1200mA	⬡	55mm	4	Requires 1200mA driver
50140BAU/W/V	White	CCT V	3000K-4000K-6000K	40W	3600lm-4000lm-3800lm	230V	□	60mm	4	Complete with 1000mA driver



one

The IP65 Recessed Panels 600X600mm



50140BW | 40W | SMD 2835 | 595x595mm | Aluminium + Steel


Backlit.



Optional suspension kit.
Order code 050017.



Optional
recessed kit (4pcs).
Order code 050108.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V		60mm	4	Complete with IP65 950mA driver

The Rectangular Panels 1200x300mm



50148RE | 48W | SMD LED | 1195x295mm | Aluminium

Driver must be ordered separately.



Optional suspension kit.
Order code 050017.





Requires 2 sets.

Optional recessed kit (4pcs).
Order code 050108.



Optional non-dimmable driver.
Order code 89048.
Optional TRIAC dimmable driver.
Order code 89048T.

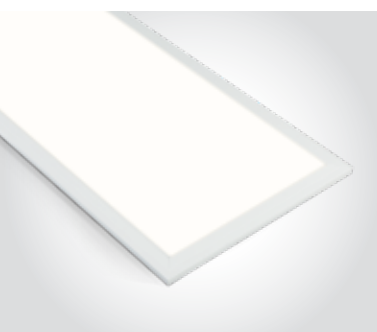

50140BR | 40W | SMD LED | Aluminium + steel

Backlit.



Optional suspension kit.
Order code 050017.





Requires 2 sets.

Optional recessed kit (4pcs).
Order code 050108.



Optional DALI & Push to DIM driver.
Order code 89040L.

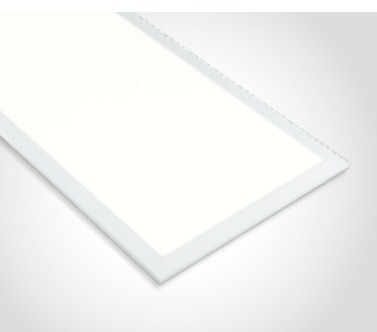

50140BRU | 40W | SMD LED | Aluminium + steel | Microprismatic

Backlit.



Optional suspension kit.
Order code 050017.




Requires 2 sets.

Optional recessed kit (4pcs).
Order code 050108.




Optional DALI & Push to DIM driver.
Order code 89040L.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	↓↑	📦	Notes
50148RE/W/D	White	Daylight	6000K	48W	4100lm	1200mA	⬢	50mm	4	Requires 1200mA driver
50140BR/W/C	White	Cool white	4000K	40W	4000lm	230V	□	50mm	4	Complete with 1000mA driver
50140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V	□	50mm	4	Complete with 1000mA driver




10105E | 5W | LED | Natural aluminium




10115E | 15W | LED | Natural aluminium



10130A | 30W | SMD LED | Aluminium





10112KD | 12W | SMD LED | Plastic




10108ED/W/BS/W

10108ED | 8W | SMD LED | Aluminium



10108ED/W/B/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	💡	⬆️	📦	Notes
10105E/AL/C	Aluminium	-	Cool white	4000K	5W	375lm	-	500mA	Ⅱ	40cm	85mm	110mm	20	Requires 500mA driver
10105E/AL/W	Aluminium	-	Warm white	3000K	5W	360lm	-	500mA	Ⅱ	40cm	85mm	110mm	20	Requires 500mA driver
10115E/AL/C	Aluminium	-	Cool white	4000K	15W	1125lm	-	700mA	Ⅱ	40cm	125mm	150mm	20	Requires 700mA driver
10115E/AL/W	Aluminium	-	Warm white	3000K	15W	1050lm	-	700mA	Ⅱ	40cm	125mm	150mm	20	Requires 700mA driver
10130A/AL/W	Aluminium	-	Warm white	3000K	30W	2300lm	80°	100-240V	Ⅲ	-	210mm	170mm	5	Complete with 350mA driver
10112KD/W/C	White	-	Cool white	4000K	12W	900lm	100°	350mA	Ⅱ	30cm	168mm	160mm	12	Requires 350mA driver
10108ED/W/B/W	White	Black	Warm white	3000K	8W	480lm	60°	230V	Ⅲ	-	75mm	80mm	50	Complete with 300mA driver
10108ED/W/BS/W	White	Brass	Warm white	3000K	8W	560lm	60°	230V	Ⅲ	-	75mm	80mm	50	Complete with 300mA driver



Surface/Recessed Panels Adjustable Cut Out Hole




IP20

62116F | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic



Adjustable cutout hole.



IP20

62116FA | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic




Adjustable cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver

The Chrome Bezel Range

Aluminium

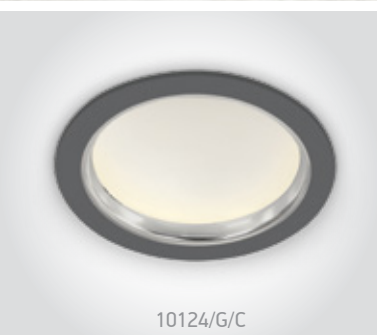

10124 | 24W | SMD 2835 | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124/G/C	Grey	Cool white	4000K	24W	1550lm	120°	230V					Complete with 600mA driver

The Budget Downlight Range

Aluminium




10103T | 3W | SMD 2835 | Aluminium



10107T | 7W | SMD 2835 | Aluminium




10115T | 15W | SMD 2835 | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10107T/W/W	White	Warm white	3000K	7W	490lm	120°	230V		85mm	60mm	60	Complete with 250mA driver
10115T/W/C	White	Cool white	4000K	15W	1100lm	120°	230V		130mm	60mm	30	Complete with 300mA driver
10115T/W/W	White	Warm white	3000K	15W	1050lm	120°	230V		130mm	60mm	30	Complete with 300mA driver

The Budget Downlight Range

Aluminium

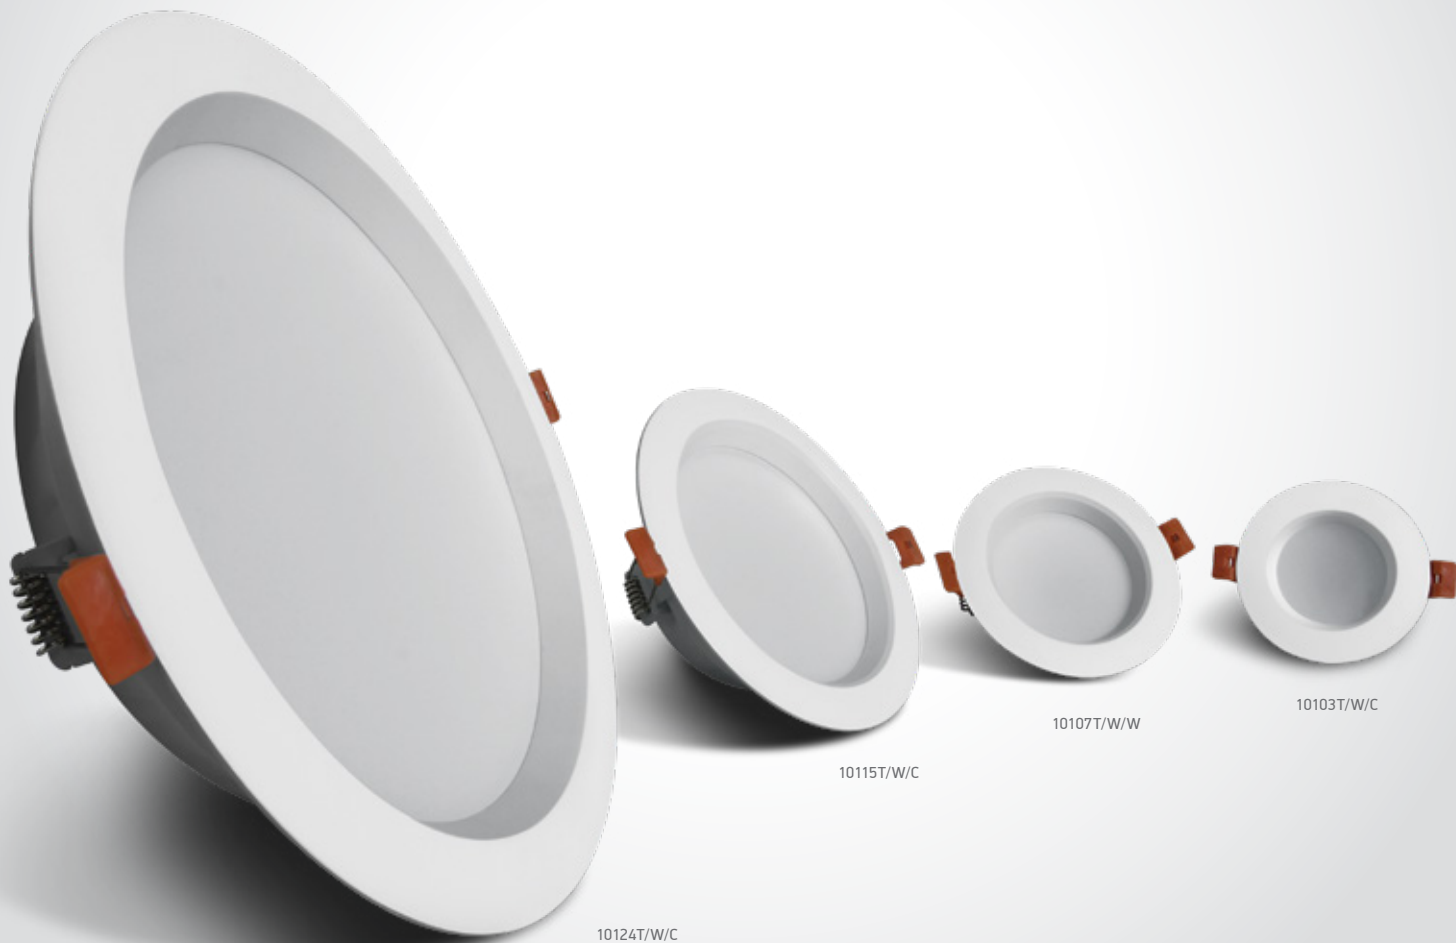

10124T/W/C

10115T/W/C

10107T/W/W

10103T/W/C



10124T | 24W | SMD 2835 | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124T/W/C	White	Cool white	4000K	24W	1800lm	120°	230V		210mm	75mm	20	Complete with 600mA driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V		210mm	75mm	20	Complete with 600mA driver

Floating Round Panels Range

Adjustable Cut Out Hole




10120CE/C

10114CE/C


10110CE/C

10110CE | 10W | SMD 4014 | Aluminium + PC

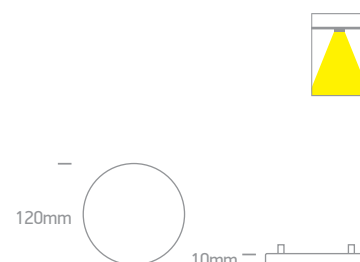


IP20

10114CE | 14W | SMD 4014 | Aluminium + PC

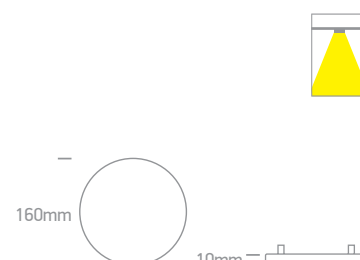

IP20

10120CE | 20W | SMD 4014 | Aluminium + PC

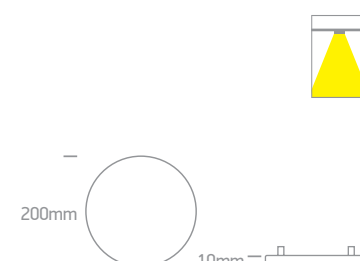

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110CE/C	White	Cool white	4000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10110CE/W	White	Warm white	3000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10114CE/C	White	Cool white	4000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10114CE/W	White	Warm white	3000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver
10120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver

Floating Square Panels Range


Adjustable Cut Out Hole



50110CE | 10W | SMD 4014 | Aluminium + PC




IP20

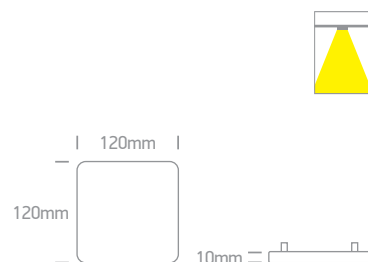

50114CE | 14W | SMD 4014 | Aluminium + PC




IP20

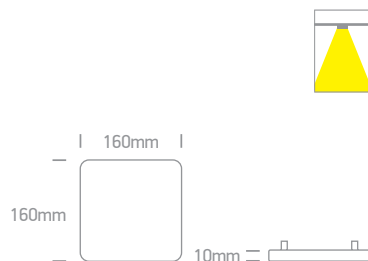

50120CE | 20W | SMD 4014 | Aluminium + PC



IP20

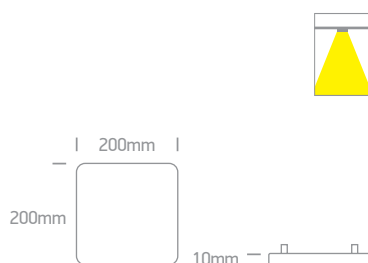

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110CE/C	White	Cool white	4000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50110CE/W	White	Warm white	3000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50114CE/C	White	Cool white	4000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50114CE/W	White	Warm white	3000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver
50120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver



10160CA/W/C



10115CA/W/C



10107CA/W/C

The COB Downlight Range

Die cast



10107CA | 7W | COB LED | Die cast




IP20



10110CA | 10W | COB LED | Die cast



IP20



10115CA | 15W | COB LED | Die cast



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/C	White	Cool white	4000K	7W	560lm	60°	230V		75mm	70mm	50	Complete with 300mA driver
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V		75mm	70mm	50	Complete with 300mA driver
10110CA/W/C	White	Cool white	4000K	10W	850lm	60°	230V		95mm	100mm	50	Complete with 300mA driver
10110CA/W/W	White	Warm white	3000K	10W	850lm	60°	230V		95mm	100mm	50	Complete with 300mA driver
10115CA/W/C	White	Cool white	4000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver

The COB Downlight Range

Die cast



10120CA | 20W | COB LED | Die cast



IP20



10130CA | 30W | COB LED | Die cast



IP20



10160CA | 60W | COB LED | Die cast



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10120CA/W/W	White	Warm white	3000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver



The Dark Light Dome Reflector

Die cast



10116FD | 16W | SMD 2835 | Die cast



10116FD | 16W | SMD 2835 | Die cast



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10116FD/W/BS	White	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver



10122FD/W/C



10116FD/W/C

10108FD/W/W


The Dark Light Dome Reflector Die cast




10108FD | 8W | SMD 2835 | Die cast



10116FD | 16W | SMD 2835 | Die cast




10122FD | 22W | SMD 2835 | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V		94mm	60mm	45	Complete with 300mA driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V		210mm	90mm	20	Complete with 600mA driver



10112/G/D

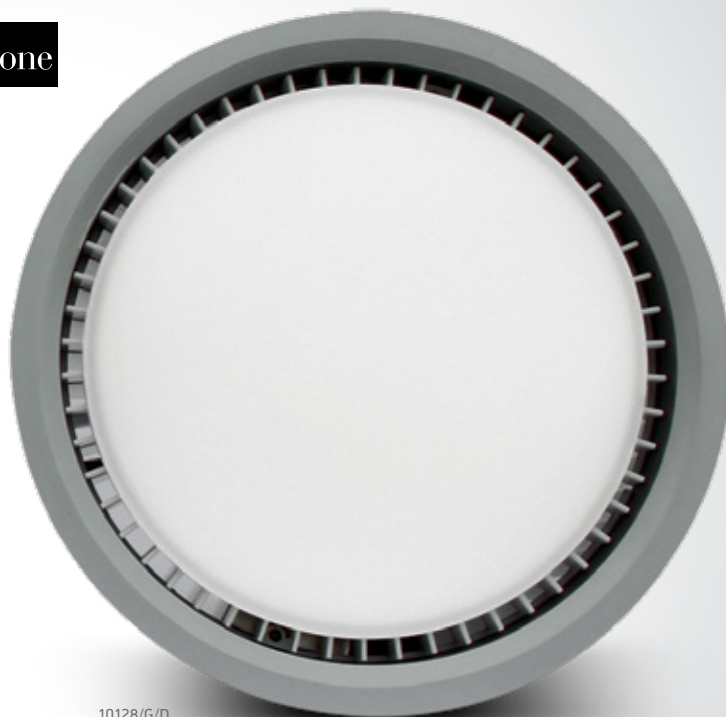

10128/G/D

Architectural Downlights

Die cast



10112/G/D | 9W | LED | Die cast



10112/G/W | 12W | LED | Die cast




10128 | 28W | LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112/G/D	Grey	Daylight	6000K	9W	400lm	90°	230V		89mm	110mm	10	Complete with driver
10112/G/W	Grey	Warm white	3000K	12W	400lm	90°	230V		89mm	110mm	10	Complete with driver
10128/G/D	Grey	Daylight	6000K	28W	1400lm	90°	230V		169mm	110mm	10	Complete with driver
10128/G/W	Grey	Warm white	3000K	28W	1150lm	90°	230V		169mm	110mm	10	Complete with driver

Round Downlights

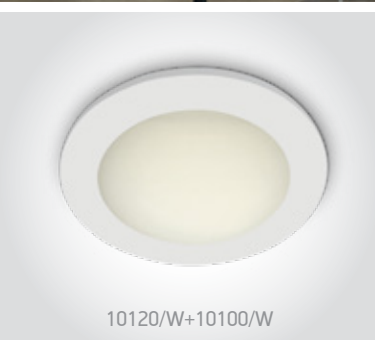

10120 | 20W | LED | Aluminium

Ring must be ordered separately.



IP44
offer

offer



10120/W+10100/AL



10142 | 42W | COB LED | Aluminium

Ring must be ordered separately.




IP20
offer

offer



10142/W+10100/AL



10100 | Rings for 10120 & 10142



offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Qty	Notes
10120/C	-	Cool white	4000K	20W	1800lm	110°	230V	□	180mm	70mm	10	Complete with 320mA driver
10120/W	-	Warm white	3000K	20W	1800lm	110°	230V	□	180mm	70mm	10	Complete with 500mA driver
10142/W	-	Warm white	3000K	42W	3225lm	60°	100-240V	□	180mm	170mm	4	Complete with 1000mA driver

The COB Project Round Range




10105K | 5W | COB LED | Die cast



10105K/W/W



IP53
offer



10105K/W/C



10105K | 5W | COB LED | Die cast



10105K/G/W



IP53
offer



10110K | 10W | COB LED | Die cast



IP53
offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105K/W/C	White	Cool white	4000K	5W	410lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/W/W	White	Warm white	3000K	5W	350lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/C	Grey	Cool white	4000K	5W	410lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/W	Grey	Warm white	3000K	5W	350lm	100°	230V		107mm	130mm	24	Complete with 400mA driver
10110K/G/W	Grey	Warm white	3000K	10W	600lm	100°	230V		122mm	150mm	24	Complete with 250mA dimmable driver



The COB Project Round Range


Dimmable



10120K | 20W | COB LED | Die cast

IP53
offer


80 CRI
2 YEAR
LED BUILT IN
TRIAC DIMMABLE
CE



10130K | 30W | COB LED | Die cast

IP53
offer


80 CRI
2 YEAR
LED BUILT IN
TRIAC DIMMABLE
CE



10130KA | 30W | COB LED | Die cast

IP53
offer

80 CRI
2 YEAR
LED BUILT IN
TRIAC DIMMABLE
CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10120K/G/W	Grey	Warm white	3000K	20W	1500lm	100°	230V	□	150mm	170mm	24	Complete with 500mA dimmable driver
10130K/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	□	175mm	195mm	12	Complete with 700mA dimmable driver
10130KA/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	□	210mm	210mm	12	Complete with 700mA dimmable driver



The COB Project Square Range

Die cast



50105K | 5W | COB LED | Die cast




LED
BUILT IN

80
CRI

CE

2
YEAR

IP53
offer




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50105K/G/C	Grey	Cool white	4000K	5W	310lm	100°	230V			85x85mm	115mm	24	Complete with 400mA driver

Shop Square Boxes




IP20

50120B | 20W | COB LED | Aluminium + metal



IP20

50130B | 30W | COB LED | Aluminium + metal



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50120B/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		105x105mm	120mm	20	Complete with 500mA driver
50130B/W/C	White	Cool white	4000K	30W	2700lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver
50130B/W/W	White	Warm white	3000K	30W	2600lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver



10115CD/W/W

10107CD/W/C


The COB Pro Range



10107CD | 7W | COB LED | Die cast




IP20
offer



10115CD | 15W | COB LED | Die cast



IP20
offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CD/W/C	White	Cool white	4000K	7W	560lm	120°	230V		100mm	70mm	30	Complete with 300mA driver
10115CD/W/W	White	Warm white	3000K	15W	1095lm	120°	230V		160mm	90mm	18	Complete with 400mA driver


The SMD Dark Light Range




10109D | 9W | SMD 2835 | Die cast



10122D | 22W | SMD 2835 | Die cast



50122D | 22W | SMD 2835 | Die cast




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/🔧	⬆️/⬆️	📦	Notes
10109D/W/C	White	Cool white	4000K	9W	765lm	100°	230V	□	110mm	70mm	50	Complete with 300mA driver
10109D/B/W	Black	Warm white	3000K	9W	765lm	100°	230V	□	110mm	70mm	50	Complete with 300mA driver
10122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V	□	165mm	75mm	20	Complete with 500mA driver
10122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V	□	165mm	75mm	20	Complete with 500mA driver
10122D/B/C	Black	Cool white	4000K	22W	1870lm	100°	230V	□	165mm	75mm	20	Complete with 500mA driver
10122D/B/W	Black	Warm white	3000K	22W	1870lm	100°	230V	□	165mm	75mm	20	Complete with 500mA driver
50122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V	□	160x160mm	75mm	20	Complete with 500mA driver
50122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V	□	160x160mm	75mm	20	Complete with 500mA driver




10113UV/W/V

UGR19 CCT V Range White

10107UV | 7W | SMD 2835 | Die cast




CCT Variable




10113UV | 13W | SMD 2835 | Die cast




CCT Variable



10120UV | 20W | SMD 2835 | Die cast




CCT Variable



10130UV | 30W | SMD 2835 | Die cast





CCT Variable





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10107UV/W/V	White	CCT V	3000K-4000K-6000K	7W	525lm	230V		70mm	60mm	40	Complete with 180mA driver
10113UV/W/V	White	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/W/V	White	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

UGR19 CCT V Range Black



10113UV | 13W | SMD 2835 | Die cast

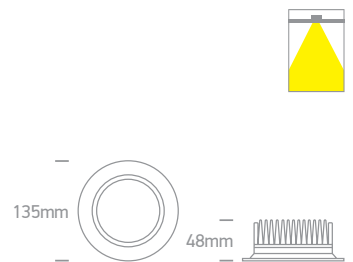

10120UV | 20W | SMD 2835 | Die cast

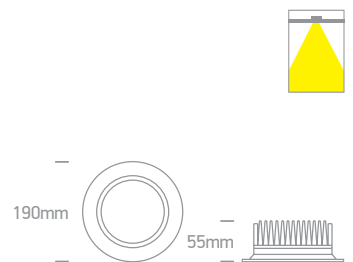

10130UV | 30W | SMD 2835 | Die cast

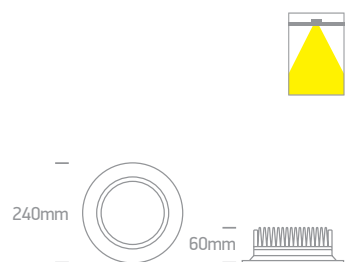


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Light	Height	Box	Notes
10113UV/B/V	Black	CCT V	3000K-4000K-6000K	13W	975lm	230V	□	120mm	70mm	20	Complete with 300mA driver
10120UV/B/V	Black	CCT V	3000K-4000K-6000K	20W	1500lm	230V	□	170mm	75mm	20	Complete with 500mA driver
10130UV/B/V	Black	CCT V	3000K-4000K-6000K	30W	2250lm	230V	□	210mm	80mm	20	Complete with 700mA driver

UGR19 CCT V Office Range Round




10110U | 10W | SMD LED | Die cast

new
IP44




10124U | 24W | SMD LED | Die cast

new
IP44




10130U | 30W | SMD LED | Die cast

new
IP44



10130U | 30W | SMD LED | Die cast

IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/V	White	CCT V	3000K-4000K-6000K	10W	850lm	230V		86mm	55mm	40	Complete with 200mA driver
10124U/W/V	White	CCT V	3000K-4000K-6000K	24W	2000lm	230V		160mm	55mm	20	Complete with 500mA driver
10130U/W/V	White	CCT V	3000K-4000K-6000K	30W	2500lm	230V		205mm	65mm	10	Complete with 750mA driver
10130U/W/C	White	Cool white	4000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver



10110U/W/V



50110UV/V




10124U/W/V

UGR19 CCT V Office Range Square

50110UV | 10W | SMD 2835 | Die cast




CCT Variable



50115UV | 15W | SMD 2835 | Die cast




CCT Variable



50125UV | 25W | SMD 2835 | Die cast




CCT Variable



50130UV | 30W | SMD 2835 | Die cast



CCT Variable




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Lighting	Mounting	Box	Notes
50110UV/W/V	White	CCT V	3000K-4000K-6000K	10W	1100lm	230V	□	85x85mm	70mm	40	Complete with 200mA driver
50115UV/W/V	White	CCT V	3000K-4000K-6000K	15W	1650lm	230V	□	130x130mm	70mm	20	Complete with 350mA driver
50125UV/W/V	White	CCT V	3000K-4000K-6000K	25W	2750lm	230V	□	160x160mm	70mm	20	Complete with 500mA driver
50130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	3300lm	230V	□	205x205mm	80mm	10	Complete with 750mA driver

The IP54 Bathroom Downlights

10107B | 7W | SMD 2835 | Die cast




IP54



10113B | 13W | SMD 2835 | Die cast



IP54

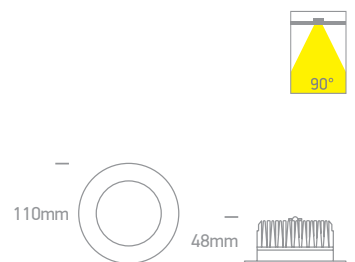

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/C	White	Cool white	4000K	7W	540lm	90°	230V		65mm	70mm	50	Complete with 180mA driver
10107B/W/W	White	Warm white	3000K	7W	500lm	90°	230V		65mm	70mm	50	Complete with 180mA driver
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	230V		95mm	70mm	24	Complete with 300mA driver



The IP54 Bathroom Downlights



10118B | 18W | SMD 2835 | Die cast



IP54



10125B | 25W | SMD 2835 | Die cast



IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118B/W/C	White	Cool white	4000K	18W	1400lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10118B/W/W	White	Warm white	3000K	18W	1300lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 720mA driver



The Dark Light Project Range



10110TD/W/C



10118TD/W/C




10125TD/W/C




The Dark Light Project Range




10110TD | 10W | SMD 2835 | Aluminium



10118TD | 18W | SMD 2835 | Aluminium



10125TD | 25W | SMD 2835 | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110TD/W/C	White	Cool white	4000K	10W	950lm	60°	230V		95mm	110mm	30	Complete with 250mA driver
10118TD/W/C	White	Cool white	4000K	18W	1710lm	60°	230V		150mm	120mm	24	Complete with 450mA driver
10118TD/W/W	White	Warm white	3000K	18W	1710lm	60°	230V		150mm	120mm	24	Complete with 450mA driver
10125TD/W/C	White	Cool white	4000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver
10125TD/W/W	White	Warm white	3000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver





The IP54 Dark Light Bathroom Downlights


Die cast



10109FD | 9W | SMD 2835 | Die cast



10120FD | 20W | SMD 2835 | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	100°	230V		111mm	70mm	40	Complete with 300mA driver
10109FD/W/W	White	Warm white	3000K	9W	765lm	100°	230V		111mm	70mm	40	Complete with 300mA driver
10120FD/W/W	White	Warm white	3000K	20W	1700lm	100°	230V		166mm	70mm	20	Complete with 300mA driver

one

10108CF/C


10115CF/C

The Frameless IP65 Range

10108CF | 8W | SMD 4014 | Die cast + PC




IP65



10115CF | 15W | SMD 4014 | Die cast + PC




IP65



10130CF | 30W | SMD 4014 | Die cast + PC



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108CF/C	White	Cool white	4000K	8W	660lm	120°	230V		80mm	50mm	40	Complete with 500mA driver
10108CF/W	White	Warm white	3000K	8W	660lm	120°	230V		80mm	50mm	40	Complete with 500mA driver
10115CF/C	White	Cool white	4000K	15W	1250lm	120°	230V		135mm	50mm	20	Complete with 500mA driver
10115CF/W	White	Warm white	3000K	15W	1250lm	120°	230V		135mm	50mm	20	Complete with 500mA driver
10130CF/C	White	Cool white	4000K	30W	2500lm	120°	230V		195mm	50mm	20	Complete with 700mA driver
10130CF/W	White	Warm white	3000K	30W	2500lm	120°	230V		195mm	50mm	20	Complete with 700mA driver



The Outdoor/Bathroom IP65 Range


Die cast



10110G | 10W | COB LED | Die cast




IP65



10115G | 15W | COB LED | Die cast



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10115G/W/W	White	Warm white	3000K	15W	1125lm	60°	230V		200cm	100mm	95mm	20	Complete with 350mA driver



The Outdoor/Bathroom IP65 Range


Die cast



10120G | 20W | COB LED | Die cast




IP65



10150G | 50W | COB LED | Die cast



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10120G/W/C	White	Cool white	4000K	20W	1880lm	60°	230V	☐	200cm	120mm	105mm	10	Complete with 500mA driver
10120G/W/W	White	Warm white	3000K	20W	1880lm	60°	230V	☐	200cm	120mm	105mm	10	Complete with 500mA driver
10150G/W/W	White	Warm white	3000K	50W	4000lm	60°	230V	☐	200cm	210mm	140mm	4	Complete with 1200mA driver