

NEW PRODUCTS 2022

EDITION 2

Recessed Spots Fixed LED



10112K/B/W + 050280/BS

10112K | 12W | COB LED | Die cast

new
DARK LIGHT
IP20

90 CRI
DIMMABLE
CE 5 YEAR

LED BUILT IN
QUICK FIX



10112K/W/W + 050280/B

Reflector must be ordered separately.





050280/W White



050280/B Black



050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Light	Height	Box	Notes
10112K/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/C	Black	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver



10112HA/W/W

10112HA | 12W | COB LED | Die cast

new
DARK LIGHT
IP20


90 CRI
DIMMABLE
CE 5 YEAR

LED BUILT IN
QUICK FIX



10112HA/B/W

Accessories on page 16.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Light	Height	Box	Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver



11105ABG | 10W | MR16 | GU10 | Aluminium







CE 5 YEAR



Complete with 0950GB.

92mm

30mm



Order Code	Colour	Watts	Input	Class					Notes
11105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



51105ABG | 10W | MR16 | GU10 | Aluminium







CE 5 YEAR



Complete with 0950GB.

94mm

30mm



Order Code	Colour	Watts	Input	Class					Notes
51105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



51205ABG | 2x10W | MR16 | GU10 | Aluminium







CE 5 YEAR



Complete with 0950GB.

176mm

30mm





Order Code	Colour	Watts	Input	Class					Notes
51205ABG/B	Black	2x10W	100-240V		15cm	162x82mm	100mm	20	-

Downlights Fixed LED



50140BU | 40W | SMD 2835 | 595x595mm | Aluminium + Steel

Backlit


Optional suspension kit.
Order code 050017.Optional
recessed kit (4pcs).
Order code 050108.Optional DALI & Push
to DIM driver.
Order code 89042L.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BU/W/C	White	Cool white	4000K	40W	4000lm	230V		60mm	6	Complete with 1000mA driver



50140BW | 40W | SMD 2835 | 595x595mm | Aluminium + Steel


Backlit

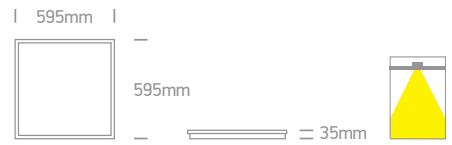Optional suspension kit.
Order code 050017.Optional
recessed kit (4pcs).
Order code 050108.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/C	White	Cool white	4000K	40W	4000lm	230V		60mm	6	Complete with IP65 950mA driver


7843 | 4W/m | COB LED | Ultra slim

3M Double face adhesive.




Supplied in 5m roll.


 Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7843/C	Cool white	4000K	4W/m	440lm/m	24V DC	III	50	Requires 24V DC driver
7843/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	50	Requires 24V DC driver


7846/RGB | 15W/m | COB LED | RGB

3M Double face adhesive.



Supplied in 5m roll.


 Dimming remote control.
Order code 20034.


Order Code	Light Colour	Watts	Input	Class		Notes
7846/RGB	RGB	15W/m	24V DC	III	50	Requires 24V DC driver



7846RB Corner connector for 7846/RGB




7846RC Connector for 7846/RGB



7846RP Power supply for 7846/RGB


7884 | 33W/m | SMD 2835 | 320LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7884/C	Cool white	4000K	33W/m	4700lm/m	24V DC	III	20	Requires 24V DC driver
7884/W	Warm white	3000K	33W/m	4100lm/m	24V DC	III	20	Requires 24V DC driver




Strips & Profiles



7904R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm




new

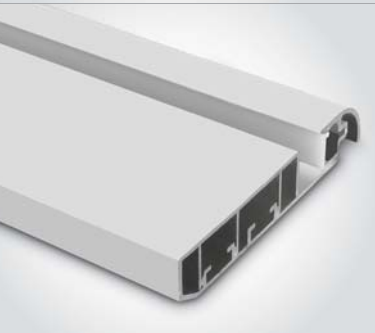

7922/W | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 8mm




new

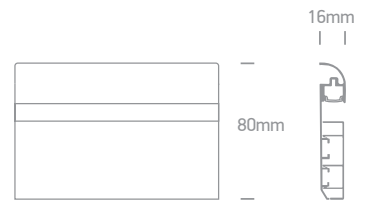

7922/B | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 8mm





new

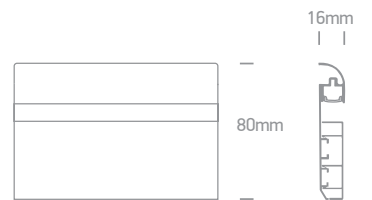

Track Lights



65168T | 50W | SMD 2835 | Linear track light | Aluminium

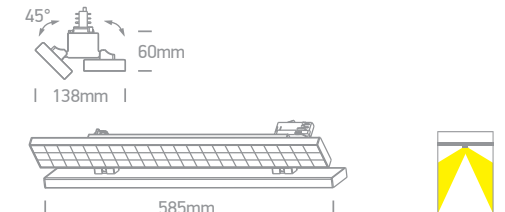

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65168T/W/W	White	Warm white	3000K	50W	6250lm	230V	⊕	6	Complete with 1400mA driver
65168T/B/W	Black	Warm white	3000K	50W	6250lm	230V	⊕	6	Complete with 1400mA driver


42001 | 48V | 1m Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit




CE 5 YEAR

new


 Optional suspension kit.
Order code 42026.

 Complete with
2pcs end cups.


Complete with cover.



Order Code	Colour	Input	Class		Notes
42001/B	Black	48V	III	1	-


42002 | 48V | 2m Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit




CE 5 YEAR

new


 Optional suspension kit.
Order code 42026.

 Complete with
2pcs end cups.


Complete with cover.




Order Code	Colour	Input	Class		Notes
42002/B	Black	48V	III	1	-


42012A/B | Corner for 42001 & 42002 | Aluminium



CE 5 YEAR

new


42012B/B | Corner wall to wall (IN) for 42001 & 42002 | Aluminium



CE 5 YEAR

new


42012C/B | Corner wall to wall (OUT) for 42001 & 42002 | Aluminium


CE 5 YEAR

new




Tracks & Magnetic

42032 | Mechanical connector for 42001 & 42002




new



42004A/B | 48V | Power supply cable for 42001 & 42002 | ON/OFF / DALI | Plastic




new



42004C/B | 48V | Live connector/corner for 42001 & 42002 | ON/OFF / DALI | Plastic



new



42022/B | End cups for 42001 & 42002




new



42100A | 15W | SMD 2835 | Linear light | Aluminium + polycarbonate



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100A/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-



42100B | 25W | SMD 2835 | Linear light | Aluminium + polycarbonate



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100B/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-



42120B | 12W | SMD 3535 | Linear light | Assymetric | Aluminium + polycarbonate



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42120B/B/W	Black	Warm white	3000K	12W	960lm	90°	48V	III	40	-



42100E | 25W | SMD 2835 | Corner light | Aluminium + polycarbonate



new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100E/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-

Tracks & Magnetic




42102A | 12W | SMD 3535 | Linear spots | Aluminium

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	40	-




42102B | 22W | SMD 3535 | Linear spots | Aluminium

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-




42104B | 12W | SMD 3535 | Linear spots | Aluminium

new
DARK LIGHT
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42104B/B/W	Black	Warm white	3000K	12W	840lm	36°	48V	III	40	-




42106A | 12W | SMD 3535 | Linear spots | Adjustable | Aluminium

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	30	-



42106B | 22W | SMD 3535 | Linear spots | Adjustable | Aluminium




new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42108 | 6W | COB LED | Aluminium




new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42108/B/W	Black	Warm white	3000K	6W	480lm	38°	48V	III	30	-



42108A | 2x6W | COB LED | Aluminium




new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42108A/B/W	Black	Warm white	3000K	2x6W	960lm	38°	48V	III	40	-



42110 | 8W | COB LED | Honeycomb | Aluminium



new
DARK LIGHT
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42110/B/W	Black	Warm white	3000K	8W	640lm	15°	48V	III	30	-

Tracks & Magnetic



42114A | 12W | COB LED | Aluminium

new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	24	-



42114B | 24W | COB LED | Aluminium

new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114B/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-



42114C | 30W | COB LED | Aluminium

new

IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114C/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-



42134 | 7W | COB LED | Aluminium



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-



42134A | 2x7W | COB LED | Aluminium



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134A/B/W	Black	Warm white	3000K	2x7W	1120lm	36°	48V	III	30	-



42118 | 26W | COB LED | Aluminium



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42118/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-



42116C | 15W | COB LED | Aluminium



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42116C/B/W	Black	Warm white	3000K	15W	1200lm	38°	48V	III	16	-

Tracks & Magnetic




42130A | 5W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130A/B/W	Black	Warm white	3000K	5W	350lm	38°	48V	III	30	-



42130B | 9W | COB LED | Aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130B/B/W	Black	Warm white	3000K	9W	630lm	38°	48V	III	30	-



42132 | 7W | COB LED | Aluminium

With removable tube.




With tube.

Without tube.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42132/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-



42134B | 7W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134B/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-



42100BL | 25W | SMD 2835 | Linear light | DALI | Aluminium + polycarbonate



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100BL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-



42102BL | 22W | SMD 3535 | Linear spots | DALI | Aluminium



new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42106BL | 22W | SMD 3535 | Linear spots | DALI | Adjustable | Aluminium



new
IP20

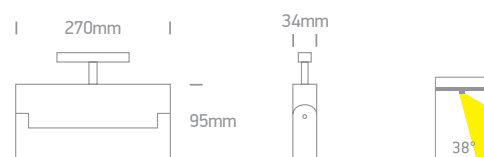

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42114BL | 24W | COB LED | DALI | Aluminium

new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114BL/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-



42114CL | 30W | COB LED | DALI | Aluminium

new

IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114CL/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-



42118L | 26W | COB LED | DALI | Aluminium

new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42118L/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-



67426D/W

67426D | 10W | MR16 | GU10 | Die cast



new
IP54



67426D/AN




67426D/B



67426D/G



67426D/BR



Order Code	Colour	Watts	Input	Class		Notes
67426D/W	White	10W	100-240V	⌚	18	-
67426D/AN	Anthracite	10W	100-240V	⌚	18	-
67426D/B	Black	10W	100-240V	⌚	18	-
67426D/G	Grey	10W	100-240V	⌚	18	-
67426D/BR	Rust brown	10W	100-240V	⌚	18	-



67426B/W

67426B | 10W | MR16 | GU10 | Die cast



new
IP54



67426B/AN




67426B/B



67426B/G



67426B/BR



Order Code	Colour	Watts	Input	Class		Notes
67426B/W	White	10W	100-240V	⌚	18	-
67426B/AN	Anthracite	10W	100-240V	⌚	18	-
67426B/B	Black	10W	100-240V	⌚	18	-
67426B/G	Grey	10W	100-240V	⌚	18	-
67426B/BR	Rust brown	10W	100-240V	⌚	18	-



67426C/W

67426C | 2x10W | MR16 | GU10 | Die cast



new
IP54



67426C/AN




67426C/B



67426C/G




67426C/BR







Order Code	Colour	Watts	Input	Class		Notes
67426C/W	White	2x10W	100-240V	⌚	18	-
67426C/AN	Anthracite	2x10W	100-240V	⌚	18	-
67426C/B	Black	2x10W	100-240V	⌚	18	-
67426C/G	Grey	2x10W	100-240V	⌚	18	-
67426C/BR	Rust brown	2x10W	100-240V	⌚	18	-

Wall & Ceiling

 67400D/BR		67400D 20W PAR30 E27 Die cast								
				 Suitable for PAR30 LED lamp.						
Order Code	Colour	Watts	Input	Class						Notes
67400D/BR	Rust brown	20W	100-240V						6	-

Wall & Ceiling LED


 67524A/AN/W		67524A 6W COB LED Die cast								
				 67524A/W/W						
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524A/W/W	White	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver
67524A/AN/W	Anthracite	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver

 67524B/AN/W		67524B 2x6W COB LED Die cast								
				 67524B/W/W						
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524B/W/W	White	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver
67524B/AN/W	Anthracite	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver



62130L/BBS/W

62130L | 30W | SMD 2835 | Aluminium

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62130L/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver



62148L/BBS/W

62148L | 48W | SMD 2835 | Aluminium

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148L/BBS/W	Brushed brass	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver



62134N/BBS/W

62134N | 30W | SMD 2835 | Metal

new
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver




62144N/BBS/W

62144N | 50W | SMD 2835 | Metal


new
IP20


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62144N/BBS/W	Brushed brass	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver




Plafo

 62132N 32W SMD 2835 Aluminium     new IP20  62132N/MG/W  										
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132N/BBS/W	Brushed brass	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/MG/W	Metal grey	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver

Decorative

 62144NB 50W SMD 2835 Metal  new IP20   									
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62144NB/BBS/W	Brushed brass	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver

 62156C 65W SMD 2835 Aluminium  new IP20   									
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62156C/BBS/W	Brushed brass	Warm white	3000K	65W	4300lm	230V		1	Complete with 1600mA driver

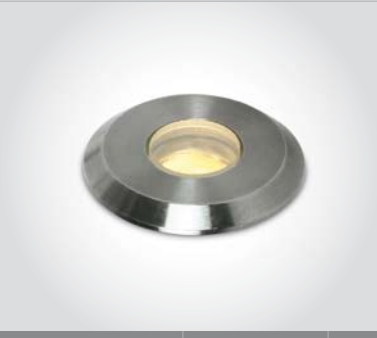
		69064B 6x1W SMD 3030 Stainless steel 316						Underwater only / 2m max depth.																																																
     		<table><tr><th>Order Code</th><th>Colour</th><th>Light Colour</th><th>CCT (K)</th><th>Watts</th><th>Lumen (lm)</th><th>Input</th><th>Class</th><th></th><th></th><th colspan="3">Notes</th></tr><tr><td>69064B/W</td><td>Stainless steel</td><td>Warm white</td><td>3000K</td><td>6x1W</td><td>400lm</td><td>24V DC</td><td></td><td>500cm</td><td>10</td><td colspan="3">Requires 24V DC driver</td></tr></table>													Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes			69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC		500cm	10	Requires 24V DC driver																		
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes																																														
69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC		500cm	10	Requires 24V DC driver																																														
		69064C 9x1W SMD 3030 Stainless steel 316						Underwater only / 2m max depth.																																																
     		<table><tr><th>Order Code</th><th>Colour</th><th>Light Colour</th><th>CCT (K)</th><th>Watts</th><th>Lumen (lm)</th><th>Input</th><th>Class</th><th></th><th></th><th colspan="3">Notes</th></tr><tr><td>69064C/W</td><td>Stainless steel</td><td>Warm white</td><td>3000K</td><td>9x1W</td><td>600lm</td><td>24V DC</td><td></td><td>500cm</td><td>8</td><td colspan="3">Requires 24V DC driver</td></tr></table>													Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes			69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC		500cm	8	Requires 24V DC driver																		
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes																																														
69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC		500cm	8	Requires 24V DC driver																																														
		69066M 0,3W SMD 2835 Stainless steel 316						Underwater only / 2m max depth.																																																
     		<table><tr><th>Order Code</th><th>Colour</th><th>Light Colour</th><th>CCT (K)</th><th>Watts</th><th>Lumen (lm)</th><th>Input</th><th>Class</th><th></th><th></th><th></th><th></th><th colspan="2">Notes</th></tr><tr><td>69066M/C</td><td>Stainless steel</td><td>Cool white</td><td>4000K</td><td>0,3W</td><td>30lm</td><td>24V DC</td><td></td><td>500cm</td><td>22mm</td><td>45mm</td><td>100</td><td colspan="2">Requires 24V DC driver</td></tr><tr><td>69066M/W</td><td>Stainless steel</td><td>Warm white</td><td>3000K</td><td>0,3W</td><td>30lm</td><td>24V DC</td><td></td><td>500cm</td><td>22mm</td><td>45mm</td><td>100</td><td colspan="2">Requires 24V DC driver</td></tr></table>													Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes		69066M/C	Stainless steel	Cool white	4000K	0,3W	30lm	24V DC		500cm	22mm	45mm	100	Requires 24V DC driver		69066M/W	Stainless steel	Warm white	3000K	0,3W	30lm	24V DC		500cm	22mm	45mm	100	Requires 24V DC driver	
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes																																												
69066M/C	Stainless steel	Cool white	4000K	0,3W	30lm	24V DC		500cm	22mm	45mm	100	Requires 24V DC driver																																												
69066M/W	Stainless steel	Warm white	3000K	0,3W	30lm	24V DC		500cm	22mm	45mm	100	Requires 24V DC driver																																												
		69066 1W SMD 3030 Stainless steel 316						Underwater only / 2m max depth.																																																
     		<table><tr><th>Order Code</th><th>Colour</th><th>Light Colour</th><th>CCT (K)</th><th>Watts</th><th>Lumen (lm)</th><th>Input</th><th>Class</th><th></th><th></th><th></th><th></th><th colspan="2">Notes</th></tr><tr><td>69066/W</td><td>Stainless steel</td><td>Warm white</td><td>3000K</td><td>1W</td><td>70lm</td><td>24V DC</td><td></td><td>500cm</td><td>46mm</td><td>90mm</td><td>20</td><td colspan="2">Requires 24V DC driver</td></tr></table>													Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes		69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC		500cm	46mm	90mm	20	Requires 24V DC driver															
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes																																												
69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC		500cm	46mm	90mm	20	Requires 24V DC driver																																												

Garden & Underwater



69066B | 6x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066B/W	Stainless steel	Warm white	3000K	6x1W	420lm	24V DC		500cm	140mm	110mm	8	Requires 24V DC driver

Industrial & Floodlights



38280 | 80W | SMD 3030 & SMD 2835 | Aluminium



Supermarket / Surface / Suspended.

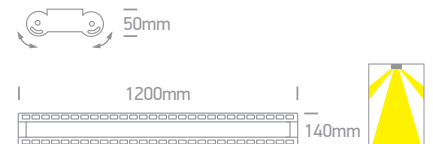

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V		4	Complete with 600mA & 1500mA drivers
38280/B/C	Black	Cool white	4000K	80W	7400lm	230V		4	Complete with 600mA & 1500mA drivers



7028CF | 250W | SMD 2835 | Die cast + tempered glass

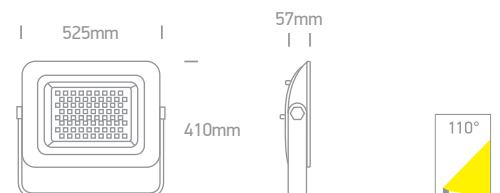

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED




89200X | 200W | 48V DC



new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200X	230V	200W	48V DC		NO	25	-



89320X | 320W | 48V DC



new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89320X	230V	320W	48V DC		NO	20	-




89200XN | 200W | 48V DC



new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200XN	100-240V	200W	48V DC		NO	40	-



89350XN | 350W | 48V DC



new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89350XN	100-240V	350W	48V DC		NO	27	Cooling fan

Drivers




89240XR | 240W | DIN RAIL driver 48V DC



new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89240XR	100-240V	240W	48V DC		NO	20	-



89042L | DALI and Push to DIM | Dimmable

Adjustable output using DIP switches.




new

IP20

LED Current Selection

Current (mA)	1	2	3	4	5
1050mA	●	●	●	●	●
1000mA	●	●	●	●	○
950mA	●	○	●	●	●
900mA	●	○	○	●	○
800mA	●	●	●	○	○
700mA	●	○	●	○	○
600mA	●	●	○	○	○
500mA	●	○	○	○	○
350mA	○	○	○	○	○



Output Current	350mA	500mA	600mA	700mA	800mA	900mA	950mA	1000mA	1050mA
Output Power	3,5-19W	5-27W	6-32W	7-38W	8-42W	9-45W	9,5-45W	10-45W	10,5-44W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89042L	230V	Refer to table	Adjustable		YES	18	DALI, Push to DIM

Control & Dimming




22022 | 400W (LED) / 800W (Incandescent) | IR Motion Sensor

Sensor head IP65 / Sensor controller IP20.



new

Detection Range: 120° / 360°
 Detection Distance: 3m / 6m (adjustable) (<24°C)
 Ambient Light: <10-2000lux (adjustable)
 Time Delay: 5s, 30s, 1min, 3min, 5min, 8min (adjustable)
 Detection Moving Speed: 0,6-1,5m/s
 Working Humidity: <93% RH
 Ambient Temperature: -20 up to +40°C
 Installation height: 1,8-2,5m (wall mount)
 Installation height: 2,2-4m (ceiling mount)



Order Code	Colour	Power	Input	Class		Notes
22022	White	400W (LED) / 800W (Incandescent)	230V		100	-

7107ALG | 7W | SMD 2835 | G9



new



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7107ALG/C	G9	Cool white	4000K	7W	700lm	230V	NO	100
7107ALG/W	G9	Warm white	3000K	7W	700lm	230V	NO	100

Accessories & Gadgets

61134A | 10W | LED | Variable colour temperature | ABS + PC + Metal tripod

Includes phone/camera bracket.




new

IP20



Includes 7cm table tripod & 150cm floor tripod.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61134A	Black	Warm white - Cool white - Daylight	3000K - 4000K - 6000K	10W	800lm	100-240V		1	AC adaptor




new

IP20



Complete with remote control.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61134B	Black	Warm white - Cool white - Daylight	3000K - 4000K - 6500K	40W	3600lm	100-240V		1	AC adaptor

Marketing

060048 | ONE LIGHT Catalogue 2022 | Edition 1



new

