

NEW PRODUCTS 2023

EDITION 3



Recessed Spots Fixed LED

Downlights Fixed LED

<


50140BU | 40W | SMD2835 | Aluminium + steel | Microprismatic


Backlit.

new
IP20
Optional suspension kit.
Order code 050017.
Optional recessed kit (4pcs).
Order code 050108.
Optional DALI & Push
to DIM driver.
Order code 89040L.


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BU/W/V	White	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		60mm	4	Complete with 1000mA driver


Downlights Adjustable LED


51130 | 30W | COB LED | Aluminium + metal

new
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51130/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver


51230 | 2x30W | COB LED | Aluminium + metal

new
IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51230/W/C	White	Cool white	4000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 750mA drivers

Strips & Profiles



7839 | 4W/m | COB LED | 320 LED/m

3M Double face adhesive.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839/C	Cool white	4000K	4W/m	400lm	24V DC	III	40	Requires 24V DC driver
7839/W	Warm white	3000K	4W/m	380lm	24V DC	III	40	Requires 24V DC driver
7839/EW	Extra warm white	2700K	4W/m	360lm	24V DC	III	40	Requires 24V DC driver




Track Lights




65660BTL | 35W | COB LED | Push to DIM | DALI | Aluminium

Use standard 3 phase track.

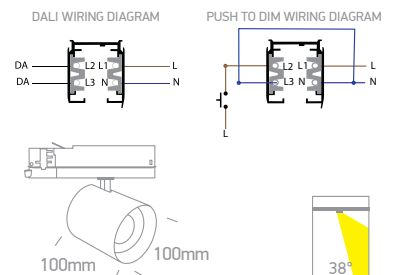

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660BTL/W/C	White	Cool white	4000K	35W	4200lm	38°	230V		10	Complete with DALI driver
65660BTL/W/W	White	Warm white	3000K	35W	4200lm	38°	230V		10	Complete with DALI driver
65660BTL/B/C	Black	Cool white	4000K	35W	4200lm	38°	230V		10	Complete with DALI driver
65660BTL/B/W	Black	Warm white	3000K	35W	4200lm	38°	230V		10	Complete with DALI driver




65664AT | 30W | SMD 2835 | Linear track light | Aluminium + PC


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65664AT/W/V	White	CCT V	3000K / 3500K / 4000K	30W	3600lm	100°	230V	⚡	20	Complete with 700mA driver
65664AT/B/V	Black	CCT V	3000K / 3500K / 4000K	30W	3600lm	100°	230V	⚡	20	Complete with 700mA driver


65664BT | 40W | SMD 2835 | Linear track light | Aluminium + PC


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65664BT/W/V	White	CCT V	3000K / 3500K / 4000K	40W	4800lm	100°	230V	⚡	12	Complete with 1000mA driver
65664BT/B/V	Black	CCT V	3000K / 3500K / 4000K	40W	4800lm	100°	230V	⚡	12	Complete with 1000mA driver



Tracks & Magnetic



40003R | 16A | 3m Recessed track | 3-phase | Aluminium



new




Order Code	Colour	Input	Ampere	Class				Notes
40003R/B	Black	100 - 240V	16A		40x3000mm	35mm	6	-




41016A | 16A | T Connector for square track | Left | Plastic



new




Order Code	Colour	Direction	Input	Ampere	Class		Notes
41016A/W/L	White	Left	100 - 240V	16A		25	-
41016A/B/L	Black	Left	100 - 240V	16A		25	-



41018A | 16A | X Connector for square track | Plastic



new



Order Code	Colour	Input	Ampere	Class		Notes
41018A/W	White	100 - 240V	16A		10	-
41018A/B	Black	100 - 240V	16A		10	-



42001TR | 48V | 1m Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.



new




Complete with 2 pcs
mechanical connectors &
4 pcs side connectors.



Complete with 2 pcs
end caps.



Complete with cover.



Order Code	Colour	Input	Class				Notes
42001TR/B	Black	48V		42x1000mm	120mm	1	-



42002TR | 48V | 2m Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.



new




Complete with 2 pcs
mechanical connectors &
4 pcs side connectors.



Complete with 2 pcs
end caps.



Complete with cover.



Order Code	Colour	Input	Class				Notes
42002TR/B	Black	48V		42x2000mm	120mm	1	-




42012ATR | Trimless recessed corner for 42001TR & 42002TR | Aluminium

Can not pass through cut out hole.



new



Order Code	Colour				Notes
42012ATR/B	Black	95x42x55mm / L Shaped	120mm	1	-




42012BTR | Trimless recessed corner wall to wall for 42001TR & 42002TR | Aluminium

Can not pass through cut out hole.



new






Order Code	Colour				Notes
42012BTR/B	Black	42x42mm (x2)	120mm	1	-

Office & Kitchen




38161A | 50W | SMD 2835 | Linear System | Diffuser | Aluminium

Can be connected in line.







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38161A/W/C	White	Cool white	4000K	50W	4250lm	230V	⊥	300cm	9	Complete with 1250mA driver
38161A/W/W	White	Warm white	3000K	50W	4250lm	230V	⊥	300cm	9	Complete with 1250mA driver
38161A/B/C	Black	Cool white	4000K	50W	4250lm	230V	⊥	300cm	9	Complete with 1250mA driver
38161A/B/W	Black	Warm white	3000K	50W	4250lm	230V	⊥	300cm	9	Complete with 1250mA driver


Wall & Ceiling


67536A | 6W | MR16 | GU10 | ABS + PC


Order Code	Colour	Watts	Input	Class		Notes
67536A/W	White	6W	100-240V	⊥	24	-
67536A/AN	Anthracite	6W	100-240V	⊥	24	-
67536A/B	Black	6W	100-240V	⊥	24	-


67536B | 2x6W | MR16 | GU10 | ABS + PC



Order Code	Colour	Watts	Input	Class		Notes
67536B/W	White	2x6W	100-240V	⊥	20	-
67536B/AN	Anthracite	2x6W	100-240V	⊥	20	-
67536B/B	Black	2x6W	100-240V	⊥	20	-




62140BAU/W/V

62140BAU | 40W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.



62140BAU/B/V





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BAU/W/V	White	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver
62140BAU/B/V	Black	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver



62140BF | 30W | SMD 2835 | Aluminium + steel

Backlit.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BF/W/C	White	Cool white	4000K	30W	3000lm	230V		4	Complete with 800mA driver




62140BFU/W/V

62140BFU | 30W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.



62140BFU/B/V




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BFU/W/V	White	CCT V	3000K / 4000K / 5700K	30W	2700lm / 3000lm / 2850lm	230V		4	Complete with 800mA driver
62140BFU/B/V	Black	CCT V	3000K / 4000K / 5700K	30W	2700lm / 3000lm / 2850lm	230V		4	Complete with 800mA driver

Plafo



62140BRU | 40W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BRU/W/V	White	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver
62140BRU/B/V	Black	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver



62150BFU | 40W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62150BFU/W/V	White	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver
62150BFU/B/V	Black	CCT V	3000K / 4000K / 5700K	40W	3600lm / 4000lm / 3800lm	230V		4	Complete with 1000mA driver



62150BRU | 50W | SMD 2835 | Aluminium + steel | Microprismatic

Backlit.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62150BRU/W/V	White	CCT V	3000K / 4000K / 5700K	50W	4500lm / 5000lm / 4750lm	230V		4	Complete with 1200mA driver
62150BRU/B/V	Black	CCT V	3000K / 4000K / 5700K	50W	4500lm / 5000lm / 4750lm	230V		4	Complete with 1200mA driver





63108B/W

63108B | 6W | COB LED | Die cast



63108B/B

63108B | 6W | COB LED | Die cast



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108B/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V	⌚	12	Complete with 700mA driver
63108B/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V	⌚	12	Complete with 700mA driver

Decorative



61082/W

61082 | 3.5W | SMD LED | Touch Switch | Dimmable | Aluminium + steel

Rechargeable USB Socket.



LED BUILT IN

80 CRI



DIMMABLE



CE



2 YEAR

new


IP54



61082/B



Charging time: 3-5Hrs
Working time: 6-7 Hrs



110mm
88mm
380mm
100mm
100mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082/W	White	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/B	Black	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery



61082 | 3.5W | SMD LED | Touch Switch | Dimmable | Aluminium + steel

Rechargeable USB Socket.



LED BUILT IN

80 CRI



DIMMABLE



CE



2 YEAR

new


IP54







Charging time: 3-5Hrs
Working time: 6-7 Hrs



110mm
88mm
380mm
100mm
100mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082/W/RGBW	White	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery



61082 | 3.5W | SMD LED | Touch Switch | Dimmable | Aluminium + steel

Rechargeable USB Socket.



LED BUILT IN

80 CRI



DIMMABLE



CE




2 YEAR

new


IP54







Charging time: 3-5Hrs
Working time: 6-7 Hrs



110mm
88mm
380mm
100mm
100mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082/B/RGBW	Black	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery



68032 | 3W | LED | Die Cast

new
DARK
LIGHT
IP54




Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68032/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver



68080B | 3W | SMD 2835 | ABS + PC


Supplied with box for concrete installation.

new
IP65

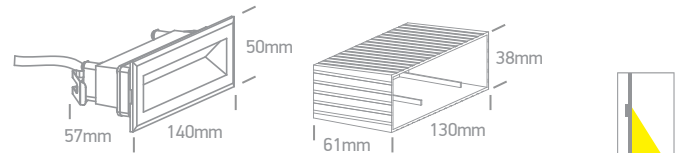


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation		Notes
68080B/B/W	Black	Warm white	3000K	3W	150lm	230V		131x39mm	125x35mm	70mm	40 AC LED


Wall Recessed & Inground

**69015A** | 3W | Aluminium

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚡	⏏	⏏	Notes
69015A/AL/W	Aluminium	Warm white	3000K	3W	30lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver

**69015B** | 3W | Aluminium


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚡	⏏	⏏	Notes
69015B/AL/W	Aluminium	Warm white	3000K	3W	60lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver

**69015C** | 3W | Aluminium

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚡	⏏	⏏	Notes
69015C/AL/W	Aluminium	Warm white	3000K	3W	80lm	24V DC	III	200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver


67204E | 10W | PAR30 | E27 | ABS + PC


Supplied with spike.



Order Code	Colour	Watts	Input	Class	Cable		Notes
67204E/B	Black	10W	100-240V		200cm	16	-


67204G | 10W | MR16 | GU10 | ABS + PC

Supplied with spike.




Order Code	Colour	Watts	Input	Class	Cable		Notes
67204G/B	Black	10W	100-240V		200cm	16	-

Garden & Underwater




67534A | 6W | MR16 | GU10 | ABS + PC



Order Code	Colour	Watts	Input	Class		Notes
67534A/AN	Anthracite	6W	100-240V		20	-




67534B | 6W | MR16 | GU10 | ABS + PC



Order Code	Colour	Watts	Input	Class		Notes
67534B/AN	Anthracite	6W	100-240V		6	-




67534C | 2x6W | MR16 | GU10 | ABS + PC



Order Code	Colour	Watts	Input	Class		Notes
67534C/AN	Anthracite	2x6W	100-240V		4	-

63100NA | 100W | SMD 2835 | AC LED | Aluminium


new
IP65

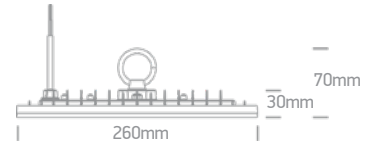

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100NA/C	Black	Cool white	4000K	100W	10000lm	90°	230V	⚡	150cm	10	-

63150NA | 150W | SMD 2835 | AC LED | Aluminium


new
IP65

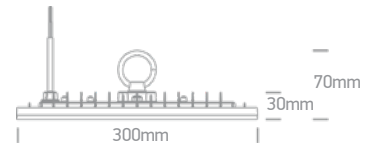

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63150NA/C	Black	Cool white	4000K	150W	15000lm	90°	230V	⚡	150cm	10	-

63200NA | 200W | SMD 2835 | AC LED | Aluminium

new
IP65

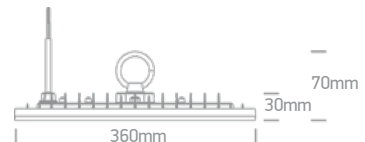


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63200NA/C	Black	Cool white	4000K	200W	20000lm	90°	230V	⚡	150cm	10	-

7058A | 36W / 60W / 90W / 120W | SMD 2835 | Surface mounted | Aluminium

CCT and power adjustable.



new
IP65



Ideal for petrol stations,
showrooms & warehouses.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7058A/W/V	White	CCT V	3000K / 4000K / 5000K	36W / 60W / 90W / 120W	18000lm (120W)	120°	230v	⚡	1		Complete with driver

Drivers

**89050LL** | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.

new
IP20

CE 5 YEAR

PUSH TO DIM

DALI DIMMABLE

LED Current Selection

550mA	●	●	●	●
600mA	●	●	●	●
650mA	●	●	●	●
700mA	●	●	●	●
750mA	●	●	●	●
800mA	●	●	●	●
850mA	●	●	●	●
900mA	●	●	●	●
950mA	●	●	●	●
1000mA	●	●	●	●
1050mA	●	●	●	●
1100mA	●	●	●	●
1150mA	●	●	●	●
1200mA	●	●	●	●
1250mA	●	●	●	●
1300mA	●	●	●	●



Order Code	Input	Power	Output	Dimmable		Notes
89050LL	230V	Refer to table	Adjustable	YES	20	DALI & Push to dim

Output Current	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA
Output Power	3,3-23,1W	3,6-25,2W	3,9-27,3W	4,2-29,4W	4,5-31,5W	4,8-33,6W	5,1-35,7W	5,4-37,8W
Output Current	950mA	1000mA	1050mA	1100mA	1150mA	1200mA	1250mA	1300mA
Output Power	5,7-39,9W	6-42W	6,3-44,1W	6,6-46,2W	6,9-48,3W	7,2-50,4W	7,5-50W	7,8-49,4W

Lamps

**7305EG** | 5W | COB LED | MR16 | GU10

Suitable for high ambient temperature enclosed fittings.

new
IP44

LED 80 CRI

CE 3 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305EG/W	GU10	Warm white	3000K	5W	500lm	38°	230V	NO	100

**7305EGD** | 5W | COB LED | MR16 | GU10 | Dimmable

Suitable for high ambient temperature enclosed fittings.

new
IP44

LED 80 CRI

CE 3 YEAR

TRIAC DIMMABLE



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305EGD/W	GU10	Warm white	3000K	5W	500lm	38°	230V	YES	100