

02 Recessed Spots Fixed LED>The IP65 Range

## 10106P/W/C



IP65 6W COB LED recessed spot suitable for installation in bathroom.

Complete with driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

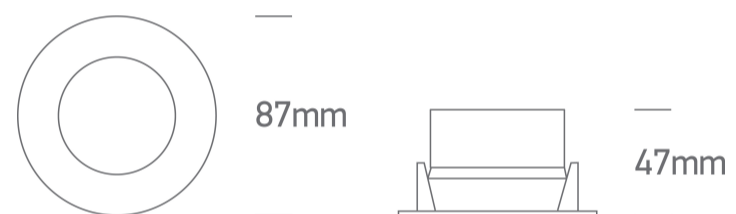

Gallery



Physical Specification

Item Group

02 Recessed Spots Fixed LED

Family

The IP65 Range

Order Code

10106P/W/C

Material

Plastic

Diffuser Material

PC

Shape

Circular

Height



47mm

|                      |      |
|----------------------|------|
| Diameter             | 87mm |
| Cutout Hole Diameter | 67mm |
| Recessed Ceiling     | Yes  |
| Depth Required       | 70mm |
| Indoor               | Yes  |
| Outdoor              | Yes  |
| Adjustable           | No   |

## Electrical Characteristics

|      |          |
|------|----------|
| Gear | Built In |
|------|----------|

### Fitting + Driver

|               |   |
|---------------|---|
| Input Voltage | 220-240V  |
| 50 Hz         | Yes   |
| 60 Hz         | Yes   |
| Safety Class  |  |
| Power(Watts)  | 6W  |
| IP Rating     | IP65  |
| Light Source  | LED built in  |
| F Mark        |  |

### Fitting

|               |                  |
|---------------|------------------|
| Input Type    | Constant Current |
| Input Current | 75mA             |
| Voltage       | 72V              |
| Power(Watts)  | 5,4W             |
| Light Source  | LED built in     |
| LED Type      | SMD 2835         |
| LED Brand     | Smalite          |
| LED Number    | 8                |

## Gear

|               |            |
|---------------|------------|
| Gear Type     | Led Driver |
| Input Voltage | 220-240V   |
| 50 Hz         | Yes        |
| 60 Hz         | Yes        |
| Power(Watts)  | 6W         |
| Power Factor  | 0,5        |
| Voltage Range | 72V        |
| Dimmable      | Yes        |
| Dimmer type   | Triac      |

## Illumination Data

|                      |   |
|----------------------|---|
| Colour Temperature   | 4000K   |
| Lumen Output         | 570lm   |
| Light Efficiency     | 95lm/W  |
| CRI                  | 80  |
| Beam Angle           | 100°  |
| Illumination Diagram |  |

## Packing Info

|            |               |
|------------|---------------|
| Box Length | 9cm           |
| Box Width  | 9cm           |
| Box Height | 7,5cm         |
| Box Weight | 0.108kg       |
| Pcs/Carton | 48            |
| Barcode    | 5291889046035 |
| HS Code    | 9405114090    |

## Certification & Warranty

switch to  
**one light!**

one  
LIGHT

