

06 Downlights Fixed LED>The COB Downlight Range Die Cast

10107CA/W/W



7W LED recessed downlight, IP20. Ideal for general lighting applications.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

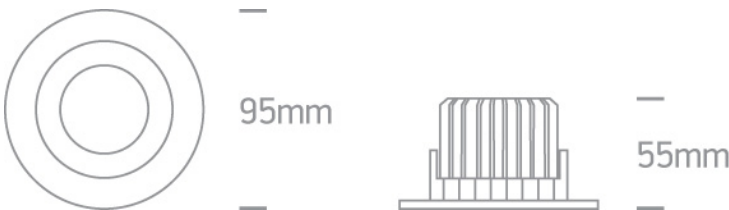

Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Die Cast
Order Code	10107CA/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	95mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	21V
Safety Class	
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-7,2W

Power Factor

0,9

Constant Current

Yes

300mA

14-24V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

3000K

Lumen Output

560lm

Light Efficiency

80lm/W

CRI

90

Beam Angle

60°

Illumination Diagram



Packing Info

Box Length

12,5cm

Box Width

6cm

Box Height

10,5cm

Box Weight

0.244kg

Pcs/Carton

50

Barcode

5291889051961

HS Code

9405413990

Certification & Warranty

Warranty

2 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

