

06 Downlights Fixed LED>The COB Downlight Range Aluminium

## 10110C/G/W



10W COB LED recessed downlight, IP20.

Complete with 260mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

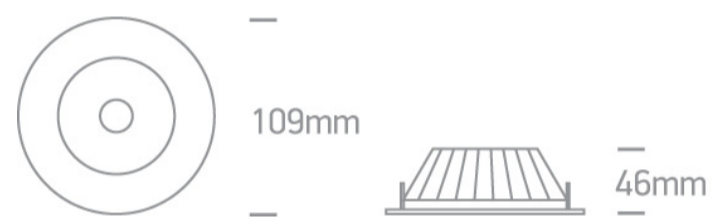

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10110C/G/W
Colour	Grey
Material	Aluminium
Shape	Circular
Height	46mm
Diameter	109mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	90mm
Indoor	Yes

Adjustable

No

## Electrical Characteristics

Gear

External-Included

### Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



### Fitting

Input Type

Constant Current

Input Current

260mA

Voltage

36V

Safety Class



Power(Watts)

9,4W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark




### Gear

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	7-11W
Power Factor	0,8
Constant Current	Yes
Output	260mA
Voltage Range	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

#### Illumination Data

Colour Temperature	3000K
Lumen Output	700lm
Light Efficiency	70lm/W
CRI	80
Beam Angle	80°
Illumination Diagram	

#### Packing Info

Box Length	12cm
Box Width	12cm
Box Height	7,5cm
Box Weight	0,330kg
Pcs/Carton	40
Barcode	5291889040354
HS Code	9405409900

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

