


06 Downlights Fixed LED>The 3-12W Round Recessed Panels CCT V

## 10112FA/W/V

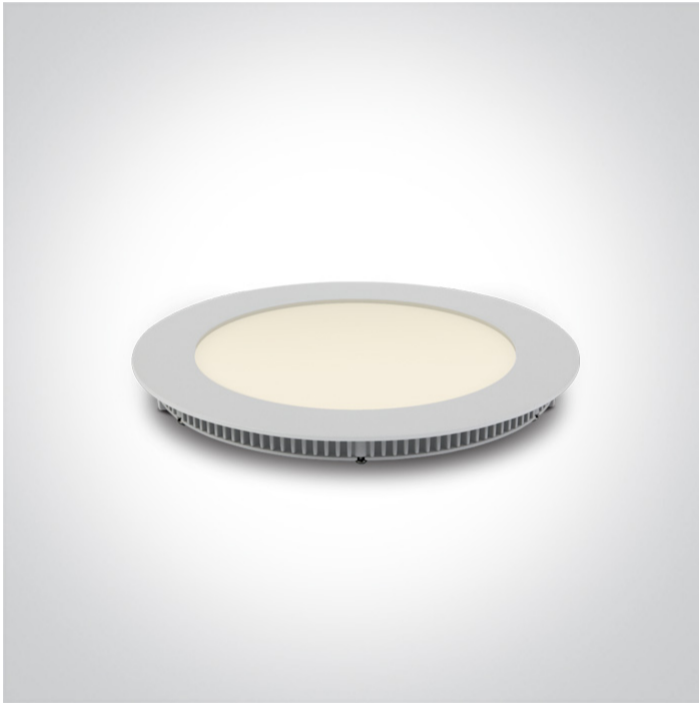

CCT Variable 12W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




### Downloads




### Dimensions

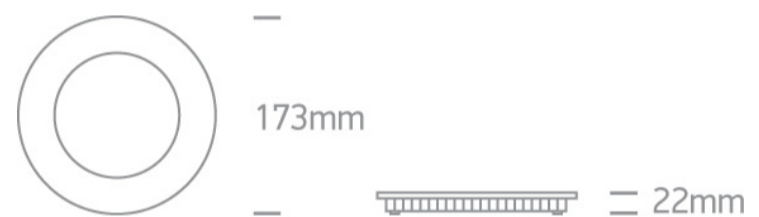

### Gallery

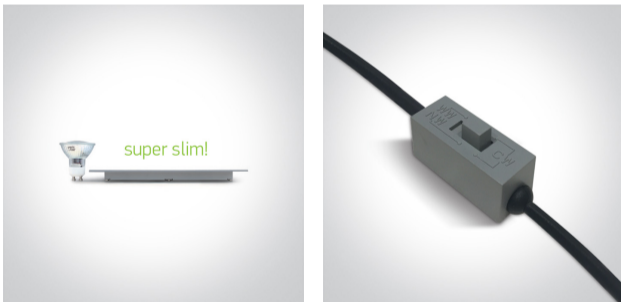

### Related items



89016UT

### Physical Specification

Item Group



06 Downlights Fixed LED


Family

The 3-12W Round Recessed Panels CCT V

Order Code	10112FA/W/V
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	22mm
Diameter	173mm
Cutout Hole Diameter	155mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No


#### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Safety Class	

Power(Watts)	10,5W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	96

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-10,5W
Power Factor	0,5
Constant Current	Yes
300mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

## Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	1200lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

## Packing Info

Pcs/Carton

20

Barcode

5291889078913

HS Code

9405119090

## Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

