


02 Recessed Spots Fixed LED>The COB Dark Light Range Interchangeable Reflector

10112K/W/W

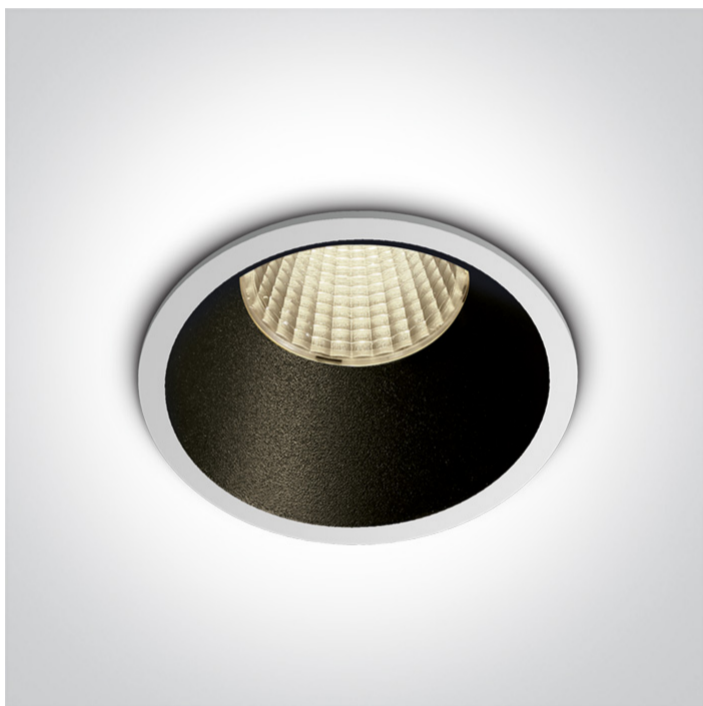

12W COB LED Dark light recessed spot.

Reflector must be ordered separately.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

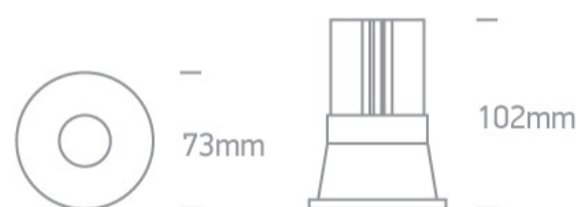

Must be ordered separately



050280/B



050280/BS



050280/W



89015A

Related items



89015AT

Physical Specification



Item Group

02 Recessed Spots Fixed LED

| | |
|----------------------|--|
| Family | The COB Dark Light Range Interchangeable Reflector |
| Order Code | 10112K/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 102mm |
| Diameter | 73mm |
| Cutout Hole Diameter | 67mm |
| Recessed Ceiling | Yes |
| Depth Required | 120mm |
| Indoor | Yes |
| Adjustable | No |


Electrical Characteristics

Fitting

| | |
|---------------|---|
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 18V |
| Safety Class |  |
| Power(Watts) | 12W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Bridgelux |
| Cable Length | 40cm |
| F Mark |  |

Illumination Data

| | |
|--------------------|-------|
| Colour Temperature | 3000K |
|--------------------|-------|

| | |
|----------------------|---|
| Lumen Output | 1100lm |
| Light Efficiency | 91,67lm/W |
| CRI | 90 |
| Beam Angle | 38° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Weight | 0.286kg |
| Pcs/Carton | 50 |
| Barcode | 5291889072355 |
| HS Code | 9405413990 |

Certification & Warranty

| | |
|----------|---------|
| Warranty | 5 years |
|----------|---------|

switch to
one light!

one
LIGHT

