

02 Recessed Spots Fixed LED>The 12W COB IP65 & IP64 Range

10112P/AL/W



12W COB LED recessed spot, IP64, for general application.

Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

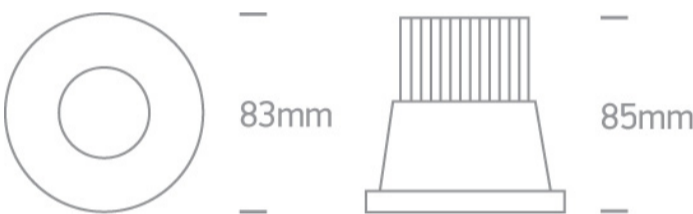

Must be ordered separately



89015A

Related items



89015AT

Physical Specification



Item Group

02 Recessed Spots Fixed LED

Family	The 12W COB IP65 & IP64 Range
Order Code	10112P/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	85mm
Diameter	83mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	105mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics


Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	
Power(Watts)	12W
IP Rating	IP64
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
--------------------	-------

Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

1100lm
91,67lm/W
80
40°

Yes

Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

9cm
9cm
10cm
0.298kg
50
5291889038955
9405413990

Certification & Warranty

Warranty
----------

3 years
---------

switch to  
**one light!**

