

discontinue>discontinueitems

10112P/MC/W



12W COB LED recessed spot, IP64, for general application.
Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

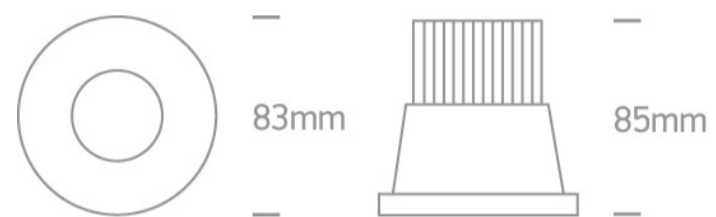

Must be ordered separately



89015A

Related items



89015AT

Physical Specification



Item Group

discontinue

Family	discontinueitems
Order Code	10112P/MC/W
Colour	Brushed Chrome
Material	Die Cast
Shape	Circular
Height	85mm
Diameter	83mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	105mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	
Power(Watts)	12W
IP Rating	IP64
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
--------------------	-------

Lumen Output	1100lm
Light Efficiency	91,67lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	9cm
Box Width	9cm
Box Height	10cm
Box Weight	0.298kg
Pcs/Carton	50
Barcode	5291889034926
HS Code	9405413990

Certification & Warranty

Warranty	3 years
----------	---------

switch to
one light!

one
LIGHT

