

02 Recessed Spots Fixed LED>The 12W Dark Light Range

10112TD/B/W



12W Recessed Dark Light LED spot with removable head, IP20.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

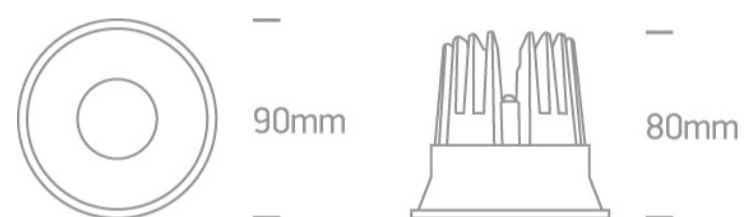

Physical Specification

| | |
|----------------------|-----------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The 12W Dark Light Range |
| Order Code | 10112TD/B/W |
| Colour | Black |
| Material | Die Cast |
| Shape | Circular |
| Height | 80mm |
| Diameter | 90mm |
| Cutout Hole Diameter | 82mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

36V

Safety Class



Power(Watts)

10,8W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

Gear

Gear Type


Led Driver

Input Voltage


220-240V

50 Hz

Yes

| | |
|------------------|---|
| 60 Hz | Yes |
| Power(Watts) | 8,1-12,6W |
| Power Factor | 0,6 |
| Constant Current | Yes |
| 300mA | 27-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Brand | Lifud |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 960lm |
| Light Efficiency | 80lm/W |
| CRI | 80 |
| Beam Angle | 20° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 11,5cm |
| Box Width | 10cm |
| Box Height | 11cm |
| Pcs/Carton | 50 |
| Barcode | 5291889061533 |
| HS Code | 9405409900 |

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

