

## 02 Recessed Spots Fixed LED>The COB IP54 Range

## 10113P/AL/W



15W COB LED recessed spot, IP54, for general lighting applications.

Suitable for bathroom installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

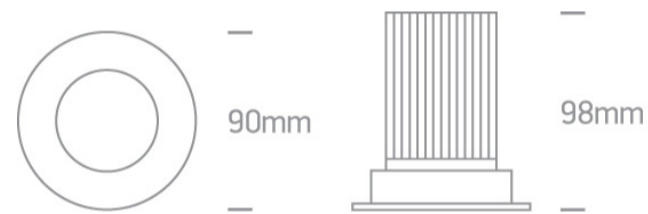

### Gallery






### Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Range
Order Code	10113P/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	98mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	20,4V
Safety Class	
Power(Watts)	14W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
LED Number	1
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	10-19,5W
Power Factor	0,9
Constant Current	Yes
700mA	17-28V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Eaglerise
Protection	0

## Illumination Data

Colour Temperature	3000K
Lumen Output	1000lm
Light Efficiency	66,67lm/W
CRI	80
Beam Angle	50°
Illumination Diagram	

## Packing Info

Box Length	16cm
------------	------

Box Width	13,5cm
Box Height	9,5cm
Box Weight	0,294kg
Pcs/Carton	30
Barcode	5291889032687
HS Code	9405409900

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

