

05 Downlights Fixed > UGR19 CCT V Range

10113UV/W/V



13W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

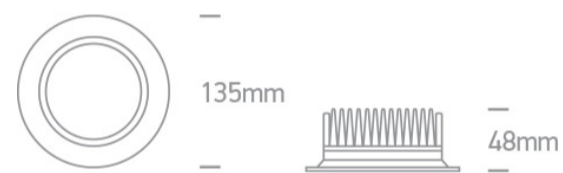

Gallery

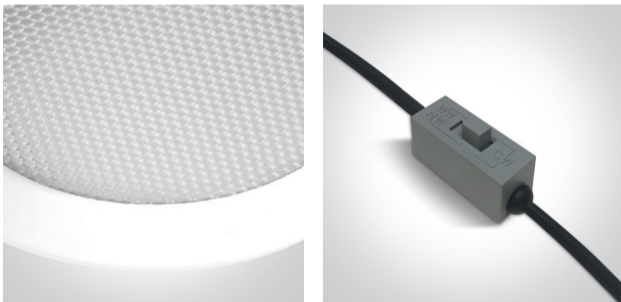




Physical Specification

Item Group	05 Downlights Fixed
Family	UGR19 CCT V Range
Order Code	10113UV/W/V
Colour	White
Material	Die Cast
Shape	Circular
Height	40mm

Diameter	135mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	38V
Safety Class	
Power(Watts)	6,84W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar



Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
8,3-12,6W
0,9
Yes
25-42V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
975lm
75lm/W
90

19

Packing Info

Box Weight

0.360kg

Pcs/Carton

20

Barcode

5291889065302

HS Code

9405413990

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

