



06 Downlights Fixed LED>UGR19 CCT V Range

10120UV/B/V



20W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with Non-flickering 500mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

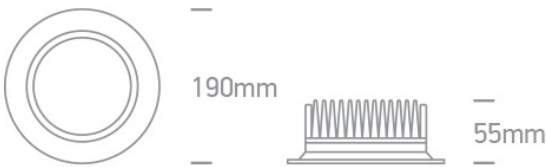

Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 CCT V Range
Order Code	10120UV/B/V
Colour	Black
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	190mm
Cutout Hole Diameter	170mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	36V
Safety Class	
Power(Watts)	19,8W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar


Gear


Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
13,75-22W
0,9
Yes
25-40V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
1500lm
75lm/W
80

19

Packing Info

Box Weight

0.615kg

Pcs/Carton	20
Barcode	5291889076414
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to

one light!

