

06 Downlights Fixed LED>The 18-30W Round Recessed Panels CCT V

10130FA/B/V



CCT Variable 30W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 800mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

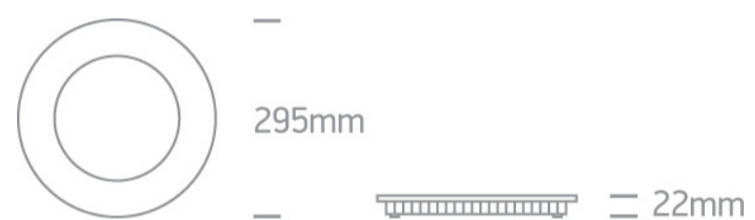

Gallery

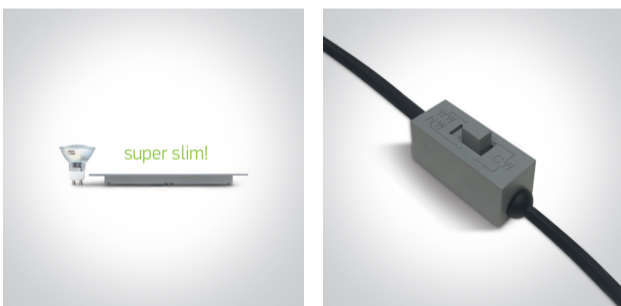




Physical Specification

Item Group	06 Downlights Fixed LED
Family	The 18-30W Round Recessed Panels CCT V
Order Code	10130FA/B/V
Colour	Black
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular

Height	22mm
Diameter	295mm
Cutout Hole Diameter	285mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	800mA
Safety Class	
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	192

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

30W

Constant Current

Yes

800mA

33-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

75°C

Housing Material

Plastic

Brand

Lifud

Illumination Data

Colour Temperature

3000K-4000K-5700K

Lumen Output

3300lm

Light Efficiency

110lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



Packing Info

Pcs/Carton

12

Barcode

5291889078968

HS Code

9405119090

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

