

06 Downlights Fixed LED>UGR19 Office Range

## 10130U/B/W



30W SMD LED UGR19 downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

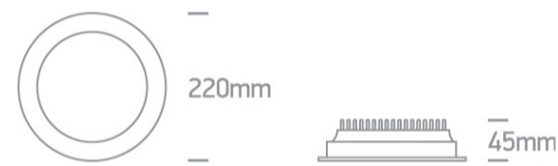

### Gallery






### Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Office Range
Order Code	10130U/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	45mm

Diameter	220mm
Cutout Hole Diameter	205mm
Recessed Ceiling	Yes
Depth Required	65mm
Indoor	Yes
Adjustable	No
IK Rating	4

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	38V
Safety Class	
Power(Watts)	28,5W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar


## Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
750mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
19,75-30W
0,9
Yes
25-40V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

## Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K
2250lm
75lm/W
80

19

## Packing Info

Pcs/Carton
------------

10
----

Barcode

5291889065418

HS Code

9405409900

### Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

