

04 Recessed Spots Adjustable LED>The COB Fire Rated Range

11106PF/W



6W LED Fire Rated Recessed adjustable spot, IP20.

Requires 350mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

Dimensions are complete with the ring.

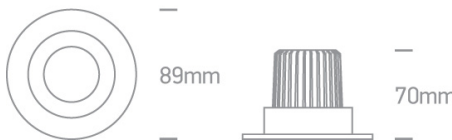


Gallery




Must be ordered separately




050044/B

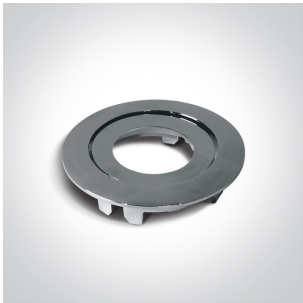

050044/C

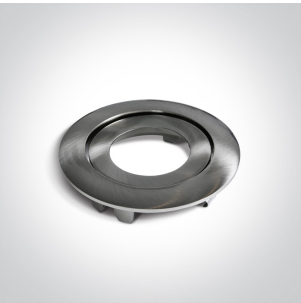

050044/MC

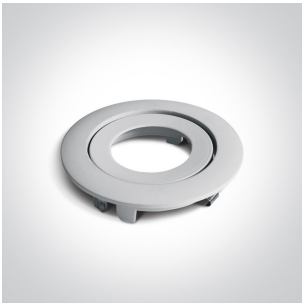

050044/W





89008


Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Fire Rated Range
Order Code	11106PF/W
Colour	White
Material	Die Cast
Shape	Circular
Height	70mm
Diameter	89mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	90mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	350mA
Safety Class	
Power(Watts)	6W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	500lm
Light Efficiency	83,33lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length	12cm
Box Width	11cm
Box Height	8,5cm
Box Weight	0,322Kg
Pcs/Carton	20
Barcode	5291889047162
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

