




Product Datasheet

04 Recessed Spots Adjustable LED>The COB Round Spots

11110A/AL/C

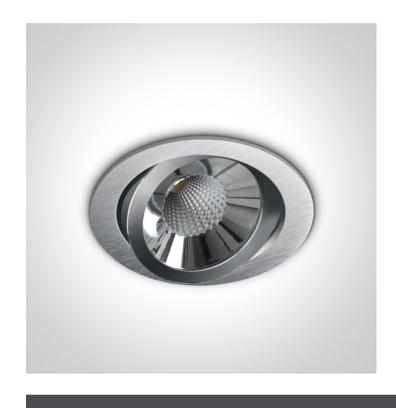

COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads







Dimensions




Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Round Spots
Order Code	11110A/AL/C
Colour	Aluminium
Material	Aluminium
Shape	Circular
Height	70mm
Diameter	121mm
Cutout Hole Diameter	100mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	P20
Light Source	_ED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current 2	250mA
Voltage	38V
Safety Class	
Power(Watts)	9,5W
IP Rating	P20
Light Source	_ED built in
LED Brand	Citizen
LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver

50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-10W
Power Factor	0,9
Constant Current	Yes
250mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
Illumination Data	
Colour Temperature	4000K
Lumen Output	840lm
Light Efficiency	840lm 84lm/W
Light Efficiency	84lm/W
Light Efficiency CRI	84lm/W 80
Light Efficiency CRI Beam Angle	84lm/W 80
Light Efficiency CRI Beam Angle	84lm/W 80
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info	84lm/W 80 36°
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	84lm/W 80 36° 15cm
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	84lm/W 80 36° 15cm 14cm
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	84lm/W 80 36° 15cm 14cm 9,5cm
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	84lm/W 80 36° 15cm 14cm 9,5cm
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton Barcode	84lm/W 80 36° 15cm 14cm 9,5cm 20 5291889033349
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	84lm/W 80 36° 15cm 14cm 9,5cm



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to one light!

