


20 Industrial & Floodlights>The Supermarket Linear System CCT V & PV

38100C/W/V

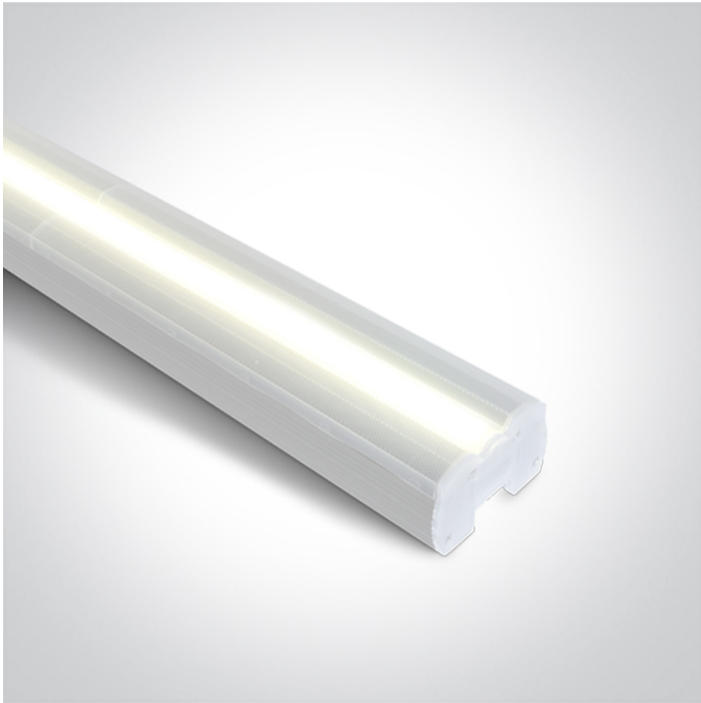

60W LED CCT & Power variable fitting.

Maximum 600W can be connected together.

Complete with 2 pcs fixing clips & plastic connector.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

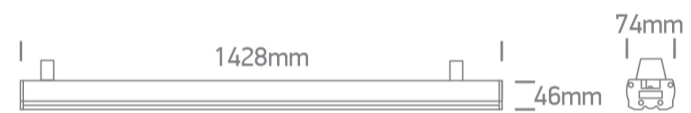

## Gallery



## Accessories



050012





050012A

## Physical Specification

Item Group	20 Industrial & Floodlights
Family	The Supermarket Linear System CCT V & PV
Order Code	38100C/W/V
Colour	White
Material	Aluminium
Shape	Rectangular
Length	1428mm
Width	74mm
Height	46mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	34W/40W/50W/60W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Light Source	LED built in

LED Type	
Cable Length	
Gear	
Gear Type	
Input Voltage	
50 Hz	
60 Hz	
Dimmable	

SMD
170cm
Led Driver
220-240V
Yes
Yes
No

### Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K-4000K-5000K
7800@60W
130lm/W
90
110°


### Packing Info

### Certification & Warranty

Warranty
Weee Directive

3 Years
Yes

switch to  
**one light!**

