



New 2025 Edition 3>Industrial & Floodlights

38140ME/V



50W LED CCT Variable & Power variable industrial emergency fitting. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

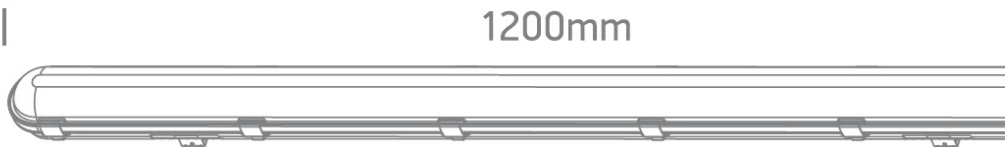

Gallery



Physical Specification

Item Group	New 2025 Edition 3
Family	Industrial & Floodlights
Order Code	38140ME/V
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular

Length	1200mm
Width	77mm
Height	66mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	28W/36W/42W/50W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No
Operation Time	3 Hours
Charging Time	16 Hours
Maintained	Yes
Non Maintained	Yes

Illumination Data

Colour Temperature	3000K-4000K-6500K
Lumen Output	5000lm @ 50W
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Certification & Warranty

Warranty	3 Years
----------	---------

switch to
one light!

