




21 Industrial & Floodlights>The Supermarket LED Linear Range Aluminium + PC

38236R/C

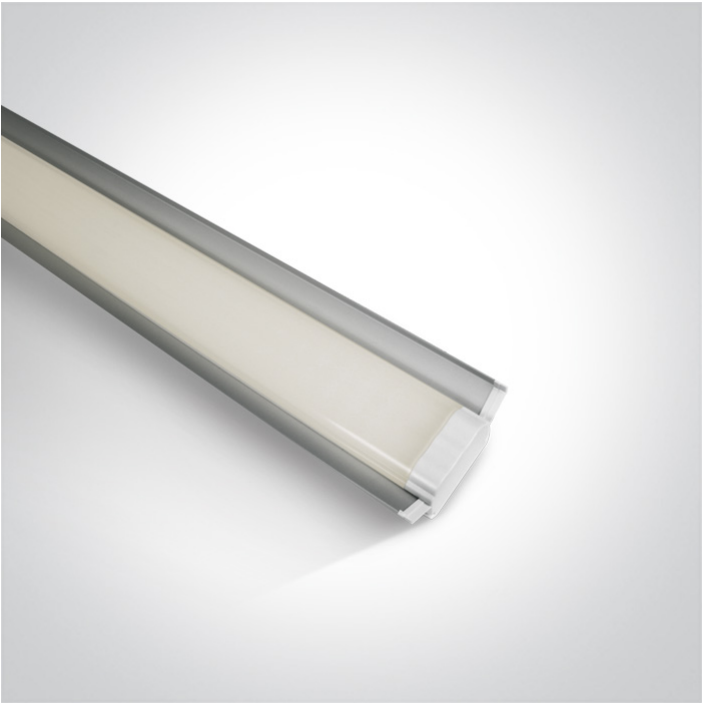

LED linear, ideal for supermarket applications. It can replace fluorescent fittings mounted on cable channels.

Supplied with 100-240V LED driver as standard.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions





Physical Specification

Item Group
Family
Order Code
Colour
Material
Diffuser Material
Shape
Length
Width
Height
Surface Ceiling
Indoor

21 Industrial & Floodlights
The Supermarket LED Linear Range Aluminium + PC
38236R/C
Grey
Die Cast
Glass
Rectangular
1200mm
105mm
40mm
Yes
Yes

Adjustable	No
------------	----

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	43W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1120mA
Voltage	38V
Power(Watts)	42W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Hongli

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes

60 Hz
Power(Watts)
Power Factor
Constant Current
Output
Voltage Range
IP Rating

Yes
34-46W
0,9
Yes
1120mA
30-41V
IP20

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


4000K
3800lm
88,4m/W
80
120°


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

1,7Kg
10
5291889037156
9405409900

Energy Label

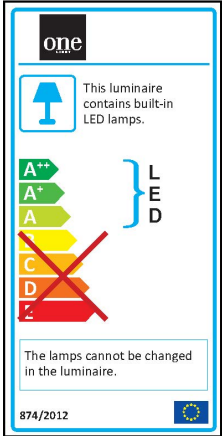

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

