




Product Datasheet

02 Recessed Spots Fixed LED>Mirror Square Boxes

50406B/B/W

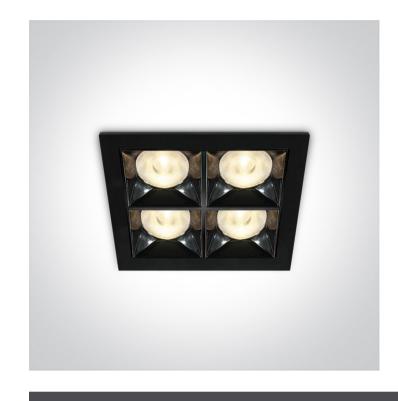

16W COB LED recessed Spot with dark chrome reflector.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	Mirror Square Boxes
Order Code	50406B/B/W
Colour	Black
Material	Die Cast
Shape	Rectangular
Length	93mm
Width	93mm
Height	47mm
Cutout Hole Width	85mm
Cutout Hole Length	85mm
Recessed Ceiling	Yes

Depth Required	70mm
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	16W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	400mA
Voltage	35,6V
Safety Class	
Power(Watts)	14,2W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Cree
LED Number	4
F Mark	F

Gear Type Led Driver Input Voltage 220-240V 50 Hz Yes 60 Hz Yes Power (Valsts) 8-16W Power Factor 0.9 Constant Current Yes 400mA 20-40V IP Rating IP20 Safety Class □ Dimmable No Housing Material Plastic Output Torminal Cable Brand Lifud Colour Temperature 3000K Lumen Output 1280lm Light Efficiency 90 Beam Angle 38° Illumination Diagram Annual Section PesCarton 36 Barcode 529188084008 HS Code 90540900	Gear	
Yes	Gear Type	Led Driver
Yes Power(Watts) 8-16W Power Factor 0,9	Input Voltage	220-240V
Power Factor 0,9 Constant Current Yes 400mA 20-40V IP Rating IP20 Safety Class □ Dirmable No Housing Material Plastic Output Terminal Cable Brand Liftud Ilumination Data 1280lm Lumen Output 1280lm Light Efficiency 80lm/W CR 90 Beam Angle 38° Illumination Diagram 36° Pes/Carton 36 Beroode 5291889064008	50 Hz	Yes
Power Factor Constant Current Yes 400mA 20-40V IP Rating IP20 Safety Class Dimmable No Housing Material Output Terminal Brand Lifud Colour Temperature Lumen Output Light Efficiency Ream Angle Illumination Datgram Packing Info Pes/Carton Separation Se	60 Hz	Yes
Constant Current Yes 400mA 20-40V IP Rating IP20 Safety Class □ Dimmable No Housing Material Plastic Output Terminal Cable Brand Lifud Colour Temperature 3000K Lumen Output 1280lm Light Efficiency 80lm/W CRI 90 Beam Angle 38° Illumination Diagram Image: Carten of the properties of the prop	Power(Watts)	8-16W
### A00mA ### A	Power Factor	0,9
IP Rating Safety Class Dimmable No Housing Material Output Terminal Brand Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Peskking Info PeskCarton Barcode IP20 No IP20 IP20 IP20 IP20 IP20 IP20 IP20 IP20	Constant Current	Yes
Safety Class Dimmable Housing Material Plastic Cable Brand Liftud Colour Temperature Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Beam Angle Illumination Diagram Peakking Info PeakCarton Barcode Solemana 36 5291889964008	400mA	20-40V
Dimmable Housing Material Plastic Output Terminal Cable Brand Lifud Colour Temperature 3000K Lumen Output 1280Im Light Efficiency 80Im/W CRI 90 Beam Angle Illumination Diagram Peskicing Info Peskicarton Barcode 5291889064008	IP Rating	IP20
Housing Material Output Terminal Brand Lifud Colour Temperature Colour Temperature Lumen Output Light Efficiency Ream Angle Illumination Diagram Packing Info Pes/Carton Barcode Plastic Cable Cable Lifud Angle Lifud Samoon Samo	Safety Class	
Output Terminal Cable Brand Lifud Light Efficiency Colour Temperature Light Efficiency CRI Beam Angle Beam Angle Illumination Diagram Pes/Carton Barcode Cable Light Efficiency Allow Angle Salim A	Dimmable	No
Brand Lifud Lifud Colour Temperature Colour Temperature 1280lm Light Efficiency 80lm/W CRI 90 Beam Angle 38° Illumination Diagram Pes/Carton 920 340 350 360 360 360 360 360 360 36	Housing Material	Plastic
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton Barcode 3000K 1280Im 90 80Im/W 38° 180 38° 38° 38° 38° 38° 38° 38° 3	Output Terminal	Cable
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pes/Carton Barcode 3000K 1280Im 90 80Im/W 70 80Im/W 80Im/W 90 90 90 90 90 90 90 90 90 9	Brand	Lifud
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pes/Carton Barcode 3000K 1280Im 90 80Im/W 70 80Im/W 80Im/W 90 90 90 90 90 90 90 90 90 9		
Lumen Output Light Efficiency 80lm/W CRI 90 Beam Angle 38° Illumination Diagram Packing Info Pcs/Carton Barcode 5291889064008	Illumination Data	
Lumen Output Light Efficiency 80lm/W CRI 90 Beam Angle 38° Illumination Diagram Packing Info Pcs/Carton Barcode 5291889064008	Colour Temperature	3000K
Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton Barcode 80Im/W 90 38° 38° 38° 38° 40 38° 38° 5291889064008		
CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton Barcode 90 38° 38° 4 36 5291889064008		
Packing Info Pcs/Carton Barcode 36 5291889064008		90
Packing Info 36 Pcs/Carton 36 Barcode 5291889064008	Beam Angle	38°
Pcs/Carton 36 Barcode 5291889064008	Illumination Diagram	
Pcs/Carton 36 Barcode 5291889064008		
Pcs/Carton 36 Barcode 5291889064008	Packing Info	
Barcode 5291889064008		
	Pcs/Carton	36
HS Code 9405409900	Barcode	5291889064008
	HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes



