




Product Datasheet

07 Downlights Adjustable LED>The COB Square Downlights Die cast

51120B/W/C

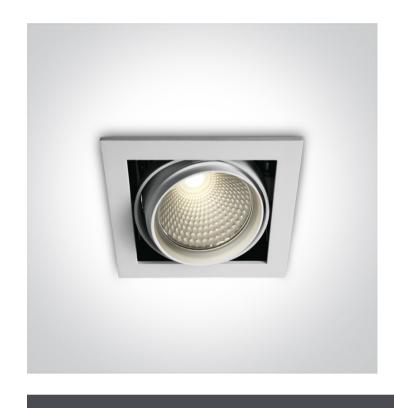

20W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions



Physical Specification

Item Group	07 Downlights Adjustable LED
Family	The COB Square Downlights Die cast
Order Code	51120B/W/C
Colour	White
Material	Die Cast
Shape	Rectangular
Length	135mm
Width	135mm
Height	138mm
Cutout Hole Width	125mm
Cutout Hole Length	125mm
Recessed Ceiling	Yes

Depth Required	160mm
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	37,3V
Safety Class	
Power(Watts)	18,65W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Sanan
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power Factor	0,9
Constant Current	Yes
500mA	36,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
lumination Data	
lumination Data	
Colour Temperature	4000K
	4000K 1600lm
Colour Temperature	
Colour Temperature Lumen Output	1600lm
Colour Temperature Lumen Output Light Efficiency	1600lm 80lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1600lm 80lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1600lm 80lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1600lm 80lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1600lm 80lm/W 80

Certification & Warranty

Weee Directive

Yes

2 Years



