




## **Product Datasheet**

#### 14 Plafo>The LED Decorative Plafo

### 62134N/BBS/W

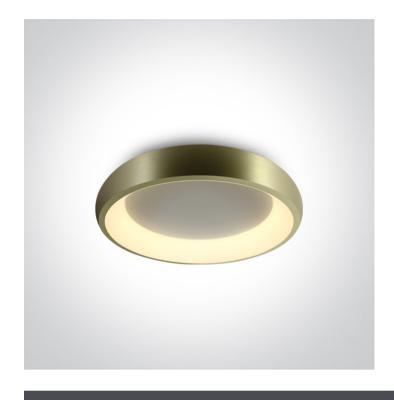

30W LED Plafo, IP20 suitable for residential and commercial application.

Complete with 700mA driver.

Complies with standard EN60598-1 and any other specific standards.





Downloads









#### Dimensions



#### Gallery



#### **Physical Specification**

Item Group	14 Plafo
Family	The LED Decorative Plafo
Order Code	62134N/BBS/W
Colour	Brushed Brass
Material	Aluminium
Shape	Circular
Height	85mm

Diameter	400mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
lectrical Characteristics	
Gear	Built In
Fitting 1 Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	39V
Power(Watts)	27,3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Bridgelux
F Mark	F
Gear	

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	23,8-27,3W
Power Factor	0,9
Constant Current	Yes
700mA	34-39v
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Kegu
llumination Data	
	000014
Colour Temperature	3000K
	3000K 2550lm
Colour Temperature	
Colour Temperature  Lumen Output	2550lm
Colour Temperature  Lumen Output  Light Efficiency	2550lm 85lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	2550lm 85lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	2550lm 85lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	2550lm 85lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	2550lm 85lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	2550lm 85lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	2550lm  85lm/W  80  120°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Weight	2550lm  85lm/W  80  120°  2.700kg
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Weight  Pcs/Carton	2550lm  85lm/W  80  120°  2.700kg  1

#### Certification & Warranty

# switch to one light!

