



14 Plafo>The LED Decorative Plafo

62144N/W/W



50W LED Plafo , IP20 suitable for residential and commercial application .

Complete with 1200mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

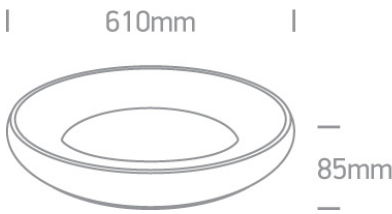

Physical Specification

|                 |                          |
|-----------------|--------------------------|
| Item Group      | 14 Plafo                 |
| Family          | The LED Decorative Plafo |
| Order Code      | 62144N/W/W               |
| Colour          | White                    |
| Material        | Aluminium                |
| Shape           | Circular                 |
| Height          | 85mm                     |
| Diameter        | 610mm                    |
| Surface Ceiling | Yes                      |
| Indoor          | Yes                      |
| Adjustable      | No                       |

| Gear             | Built In                                                                              |
|------------------|---------------------------------------------------------------------------------------|
| Fitting + Driver |                                                                                       |
| Input Voltage    | 220-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Safety Class     |    |
| Power(Watts)     | 50W                                                                                   |
| IP Rating        | IP20                                                                                  |
| Light Source     | LED built in                                                                          |
| Dimmable         | No                                                                                    |
| F Mark           |  |

|               |                                                                                       |
|---------------|---------------------------------------------------------------------------------------|
| Fitting       |                                                                                       |
| Input Type    | Constant Current                                                                      |
| Input Current | 1200mA                                                                                |
| Voltage       | 40V                                                                                   |
| Power(Watts)  | 48W                                                                                   |
| IP Rating     | IP20                                                                                  |
| Light Source  | LED built in                                                                          |
| LED Type      | SMD 2835                                                                              |
| LED Brand     | Bridgelux                                                                             |
| F Mark        |  |

|               |            |
|---------------|------------|
| Gear          |            |
| Gear Type     | Led Driver |
| Input Voltage | 220-240V   |
| 50 Hz         | Yes        |
| 60 Hz         | Yes        |
| Power(Watts)  | 36-50,4W   |

|                  |
|------------------|
| Power Factor     |
| Constant Current |
| 1200mA           |
| IP Rating        |
| Safety Class     |
| Dimmable         |
| Brand            |

|                                                                                     |
|-------------------------------------------------------------------------------------|
| 0,9                                                                                 |
| Yes                                                                                 |
| 30-42V                                                                              |
| IP20                                                                                |
|  |
| No                                                                                  |
| Kegu                                                                                |

Illumination Data

|                      |
|----------------------|
| Colour Temperature   |
| Lumen Output         |
| Light Efficiency     |
| CRI                  |
| Beam Angle           |
| Illumination Diagram |

|                                                                                       |
|---------------------------------------------------------------------------------------|
| 3000K                                                                                 |
| 4250lm                                                                                |
| 85lm/W                                                                                |
| 80                                                                                    |
| 120°                                                                                  |
|  |

Packing Info

|               |
|---------------|
| Box Length    |
| Box Width     |
| Box Height    |
| Box Weight    |
| Pcs/Carton    |
| Carton Length |
| Carton Width  |
| Carton Height |
| Carton Weight |
| Barcode       |
| HS Code       |

|               |
|---------------|
| 68cm          |
| 68cm          |
| 12cm          |
| 5.400kg       |
| 1             |
| 68cm          |
| 68cm          |
| 12cm          |
| 4,3Kg         |
| 5291889056898 |
| 9405413990    |

Certification & Warranty

switch to  
**one light!**

one  
LIGHT

