

13 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

67376/AN/W



2x3W, IP54, SMD 2835, Outdoor Slim Range Up & down beam.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

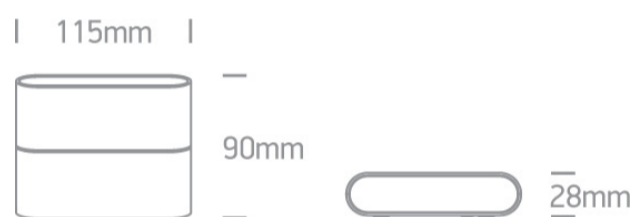

Physical Specification

Item Group	13 Wall & Ceiling LED
Family	Outdoor Slim Range Up & down beam
Order Code	67376/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	115mm
Width	90mm
Height	28mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

2x3W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

350mA

Voltage

16V

Power(Watts)

5,6W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Edison

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)


2,9-6,1W

Power Factor

0,5

Constant Current	Yes
350mA	8,5-17,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	2x210lm
Light Efficiency	70lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	9,5cm
Box Width	5,2cm
Box Height	15cm
Box Weight	0.425kg
Pcs/Carton	24
Barcode	5291889043638
HS Code	9405409900

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

