

14 Plafo>The Classic Plafo

67404M/W/W



12W LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

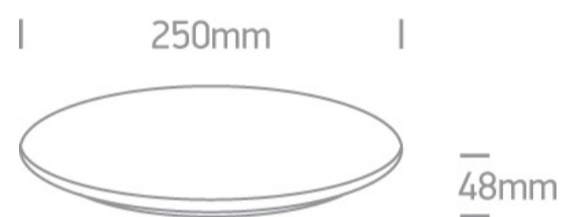

Physical Specification

| | |
|-------------------|-------------------|
| Item Group | 14 Plafo |
| Family | The Classic Plafo |
| Order Code | 67404M/W/W |
| Colour | White |
| Material | Aluminium |
| Diffuser Material | PC |
| Shape | Circular |
| Height | 48mm |
| Diameter | 250mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Adjustable | No |

IK Rating

8

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP40

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

IP Rating

IP40

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark



Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes


Power(Watts)

12W

Constant Current


Yes

| |
|--------------|
| IP Rating |
| Safety Class |
| Dimmable |

| |
|---|
| IP20 |
|  |
| No |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Illumination Diagram |

| |
|---|
| 3000K |
| 1100lm |
| 91,67m/W |
| 80 |
|  |

Packing Info

| |
|---------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Carton Length |
| Carton Width |
| Carton Height |
| Carton Weight |
| Barcode |
| HS Code |

| |
|---------------|
| 26cm |
| 6cm |
| 26cm |
| 0.780kg |
| 20 |
| 60cm |
| 54cm |
| 29cm |
| 15,6Kg |
| 5291889056959 |
| 9405114090 |

Certification & Warranty

switch to
one light!

one
LIGHT

