


19 Wall Recessed & Inground>The Inground Midi Series Natural Aluminium

69015C/AL/W

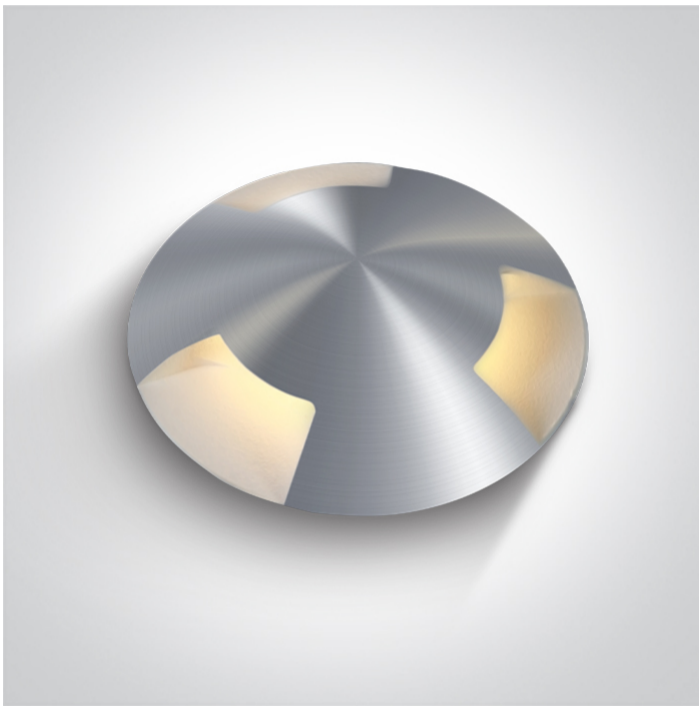

3W LED inground, aluminium, for path illumination, IK08, IP67.

Requires 24V DC driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	19 Wall Recessed & Inground
Family	The Inground Midi Series Natural Aluminium
Order Code	69015C/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	62mm
Diameter	56mm
Cutout Hole Diameter	52mm
Inground	Yes
Depth Required	90mm+300mm drainage
Indoor	Yes

Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	
Power(Watts)	3W
IP Rating	IP67
Light Source	LED built in
Cable Length	200cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	80lm
Light Efficiency	26,6lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Weight	0.350kg
Pcs/Carton	32
Barcode	5291889077619
HS Code	9405413990

Warranty

2 years

switch to
one light!

one
LIGHT

