



LED street light with SMD LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Post Diameter 60mm.

Complete with 1020mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

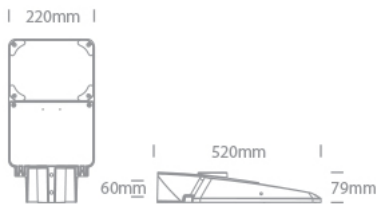

Accessories



050326

Physical Specification

Item Group	21 Industrial & Floodlights
Family	Street Lighting
Order Code	70116C/G/C
Colour	Grey
Material	Aluminium + Glass
Shape	Rectangular

Length	520mm
Width	220mm
Height	79mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No
IK Rating	9

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	120W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1020mA
Voltage	112V
Power(Watts)	114,24W
IP Rating	IP66
Light Source	LED built in
LED Type	SMD 3030

LED Brand
LED Number

Seoul
126

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
Output
Voltage Range
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
100-240V
Yes
Yes
109,14-218,28W
0,97
Yes
1020mA
107-214V
IP67

No
Metal
Connector
MOSO

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
16800lm
140lm/W
80
140°x80°


Packing Info

Box Weight

5.200kg

Pcs/Carton	1
Barcode	5291889074243
HS Code	9405413990

Certification & Warranty

Warranty	5 Years
Weee Directive	Yes

switch to
one light!

