



Flexible LED light strip, with SMD3528 LEDs, 60LEDs/meter, 4,8W/meter. Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 5cm (3-LED segment).

Requires 12V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

Cut every 5cm
(3-LED segment)



Gallery



Accessories



7822



7824

Related items



20030

Physical Specification

Item Group	09 LED Strips & Profiles
Family	The Indoor Range 12V
Order Code	7821/D
Shape	Rectangular
Length	5000mm
Width	8mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	12V DC
Safety Class	III
Power(Watts)	4,8W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 3528
LED Brand	Epistar
LED Number	60LEDs/m
F Mark	F


Illumination Data

Colour Temperature	6000K
Lumen Output	360lm
Light Efficiency	75lm/W
CRI	75
Illumination Diagram	

Packing Info

Box Length	21cm
Box Width	20cm
Box Height	2.5cm
Box Weight	0,18Kg
Pcs/Carton	40
Barcode	5291889037729
HS Code	9405409989

Energy Label

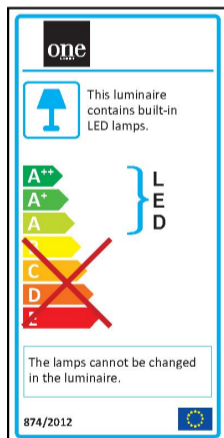

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

