



DALI &Push to DIM LED driver

Adjustable output using DIP switches.


Complies with standard EN61347-1 and any other specific standards.




Downloads



Dimensions

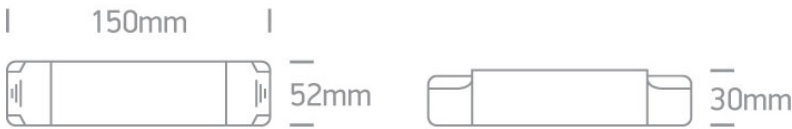

Wiring Diagram

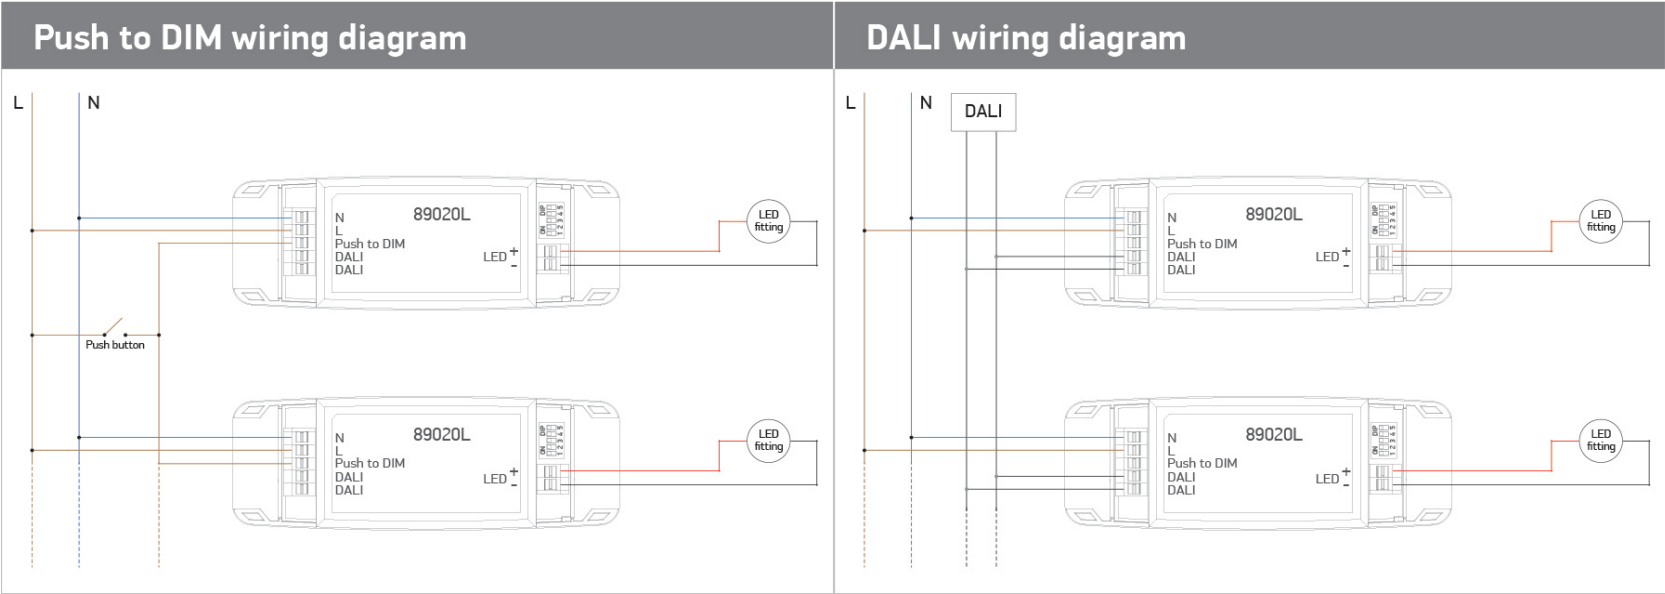

24V	○	●	●	●	●
12V	○	○	●	●	●
900mA	○	○	○	○	○
700mA	○	○	○	○	○
500mA	○	○	○	○	○
350mA	○	○	○	○	○
	1	2	3	4	5

Physical Specification

Item Group
Family
Order Code
Material

23 LED Drivers
Universal DALI Dimmable Range DALI & Push to DIM
89020L
Plastic

Shape
Length
Width
Height
Indoor

Rectangular
150mm
52mm
30mm
Yes

Electrical Characteristics

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Voltage
Constant Current
12 V
24 V
350mA
500mA
700mA
900mA
IP Rating
Safety Class
Dimmable
Dimmer type
Ambient Temp
Operating Temp
Housing Material
Output Terminal

Led Driver
220-240V
Yes
Yes
Refer to table
0.93
Yes
Yes
Yes
Yes
9-45V
9-43V
9-30V
9-23V
IP20

Yes
Dali, Push to Dim
-20~+45°C
75°C
Plastic
Cable

Brand
Protection

One Light Ltd
Short Circuit / Overload / Overheat Protection

Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Carton Length
Carton Width
Carton Height
Carton Weight
Barcode
HS Code

16cm
5,5cm
3,5cm
0.19Kg
40
36cm
30cm
23cm
7,9Kg
5291889040941
8504408290

Certification & Warranty

Warranty
Weee Directive

5 Years
Yes

switch to

one light!

