

## 22 Emergency Lights>Universal LED Emergency Kit

## 89005A/EME



Emergency pack for 5-50W LED downlights, slim for built in installation.

3 hours maintained.

Supplied complete with Ni-Cd 3,6V 4,0Ah battery.

Complies with standard EN61347-1 and any other specific standards.

IP20


### Downloads



### Dimensions



### Wiring Diagram

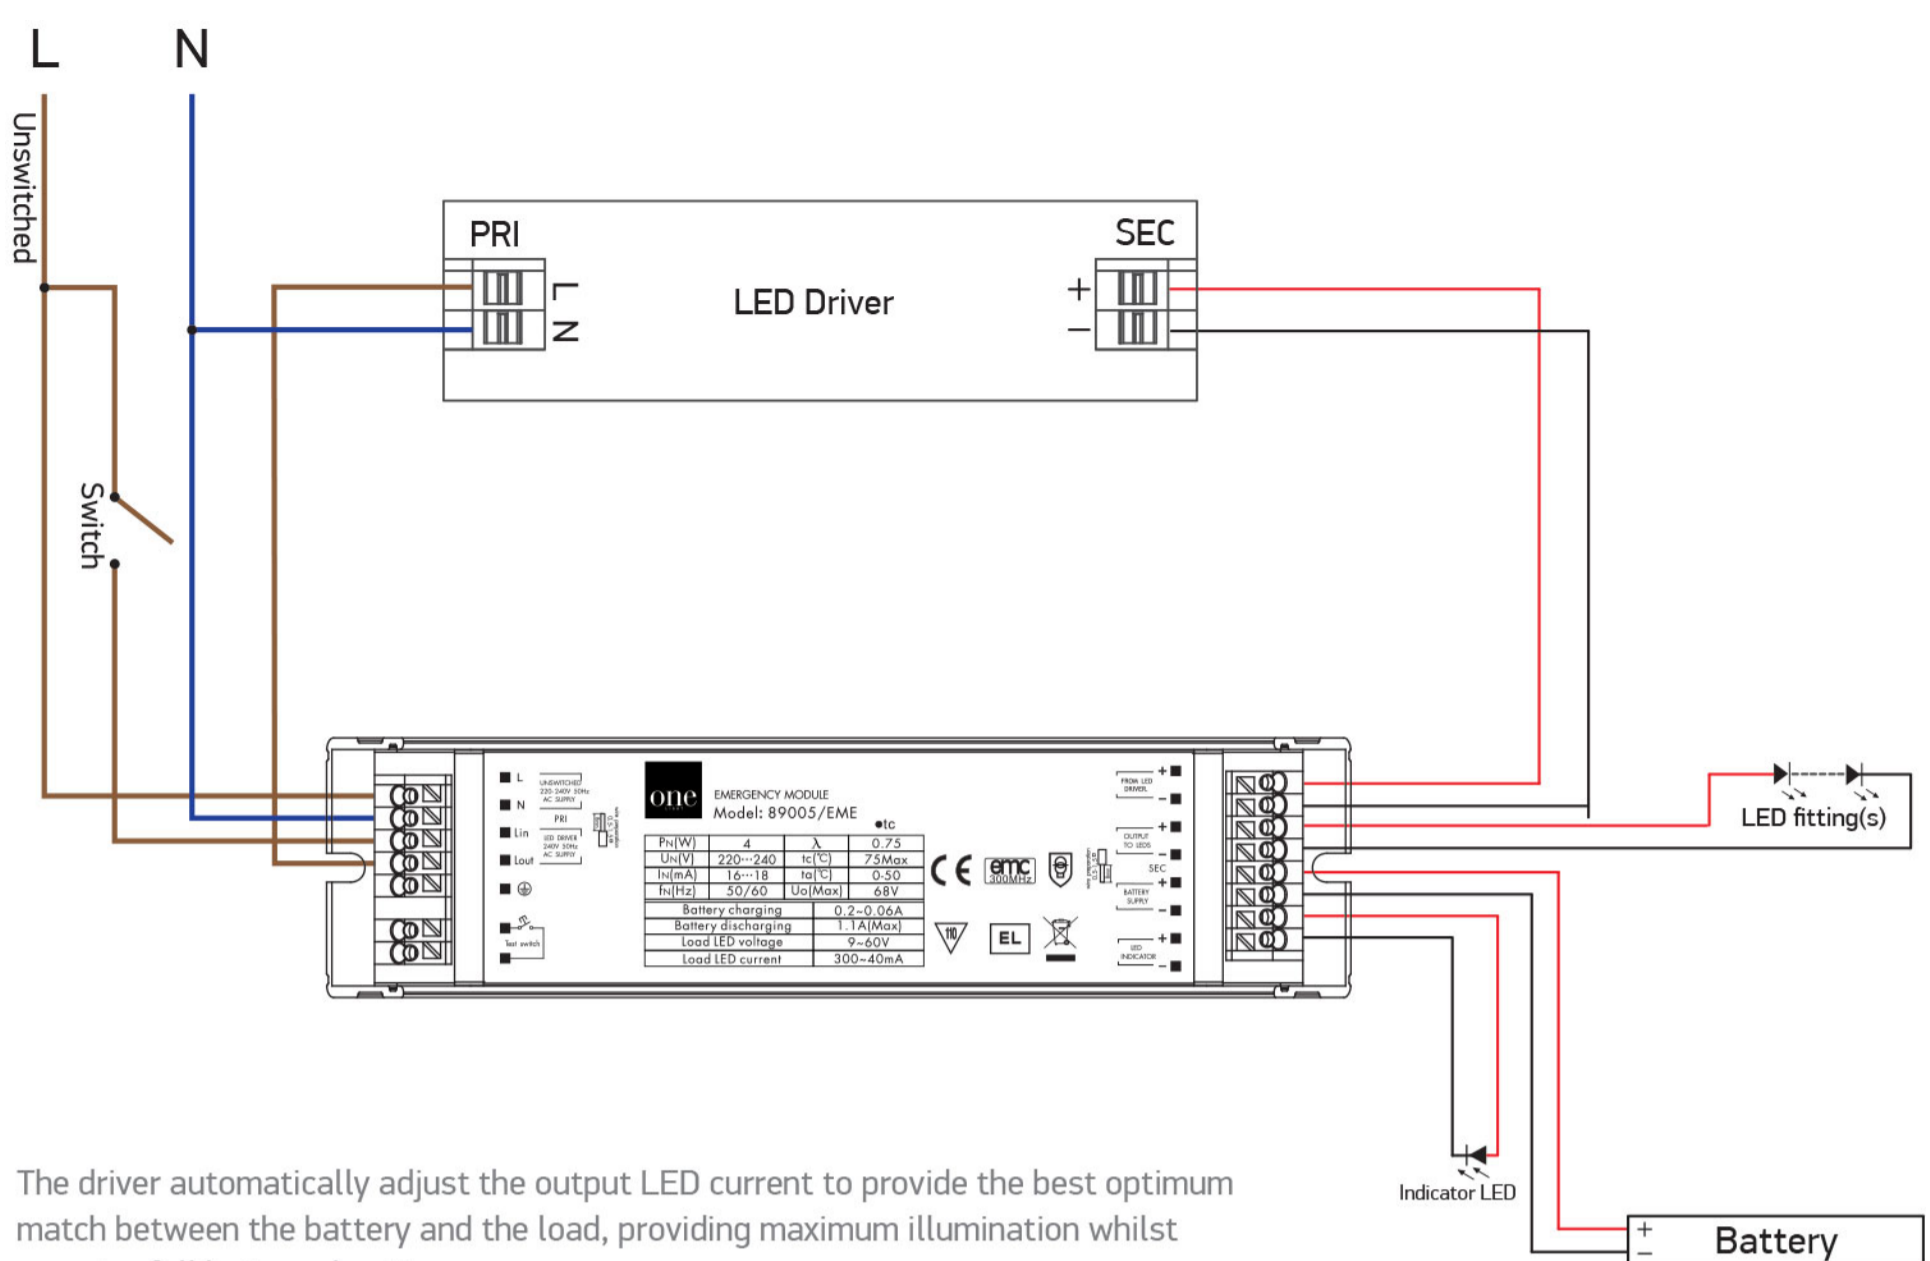

The driver automatically adjust the output LED current to provide the best optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

#### Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

#### Physical Specification

Item Group

22 Emergency Lights

Family

Universal LED Emergency Kit

Order Code

89005A/EME

Shape

Rectangular

Length

160mm

Height

22mm

#### Electrical Characteristics

Gear

Gear Type

Emergency Kit

Input Voltage

220-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	5-50W
Output	320mA-40mA
Voltage Range	8-60V
IP Rating	IP20
Dimmable	N/A
Operating Temp	55°C
Housing Material	Plastic
Output Terminal	Connector
Brand	One Light Ltd
Battery Capacity	4000mAh
Battery Voltage	3,6V
Operation Time	3 Hours
Charging Time	24 Hours
Maintained	Yes
Non Maintained	Yes

#### Packing Info

Box Weight	0.658kg
Pcs/Carton	12
Barcode	5291889062721
HS Code	8504408290

#### Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

