

22 Emergency Lights>Universal LED Emergency Kit

89005/EME



Emergency pack for 5-50W LED downlights.

3 hours maintained.

Supplied complete with Ni-Mh 3,6V 4,0Ah battery.


Complies with standard EN61347-1 and any other specific standards.




Downloads



Dimensions

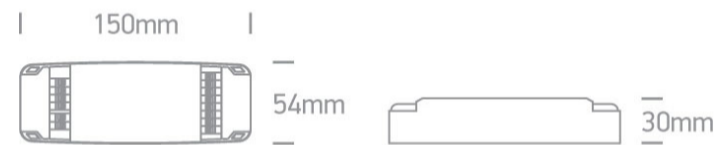

Wiring Diagram

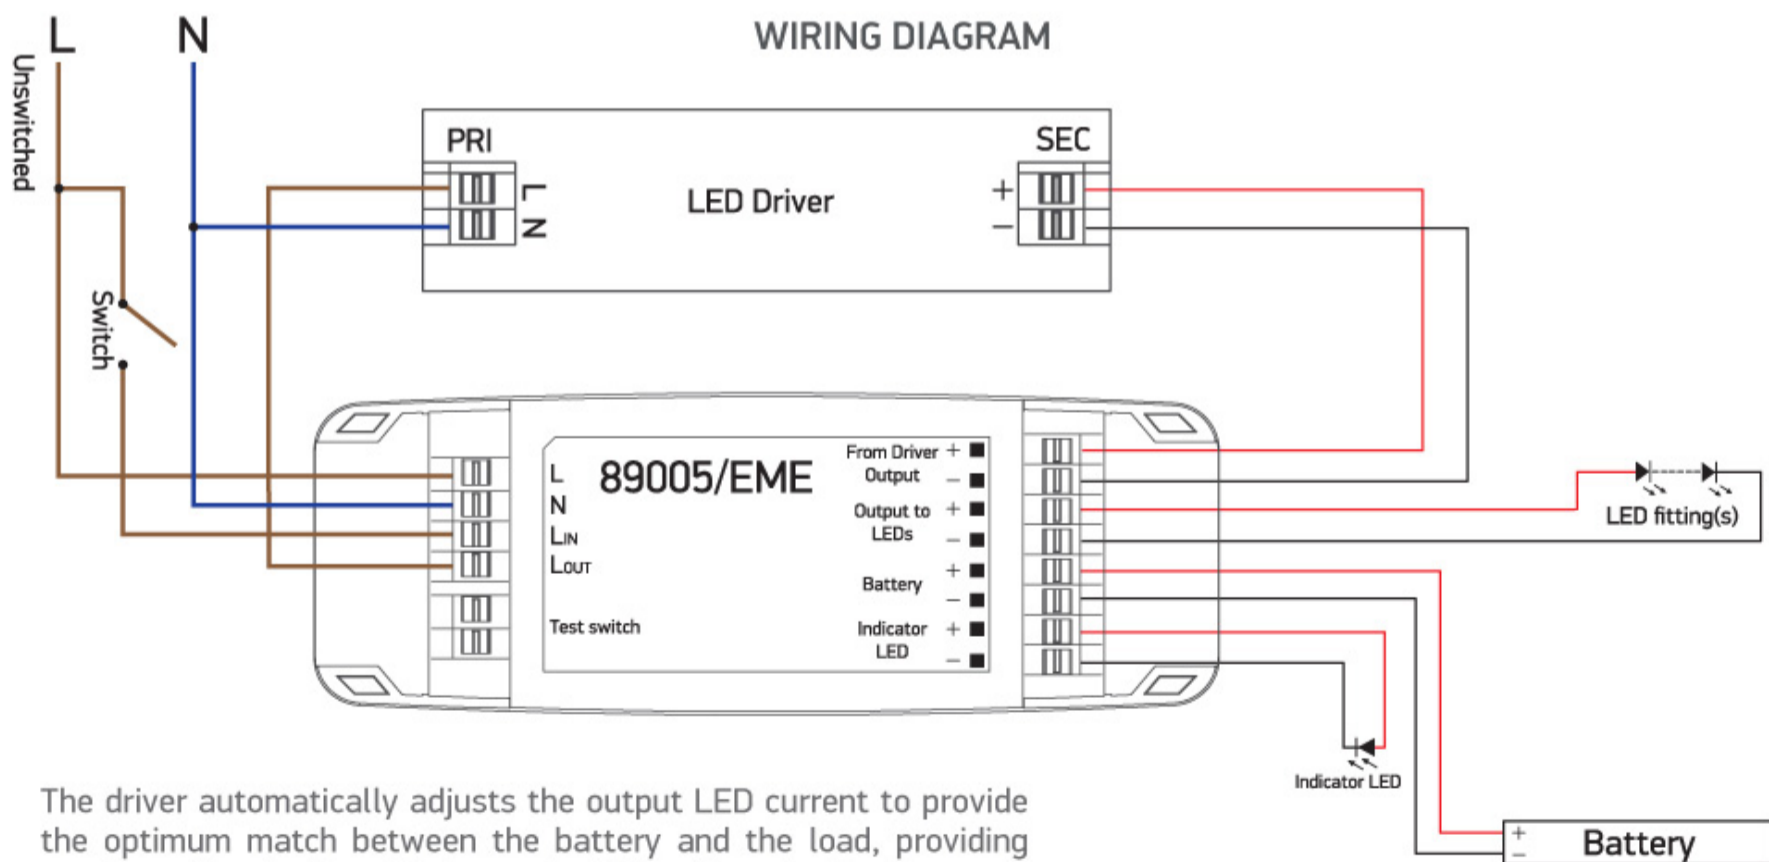

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:


Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Physical Specification

Item Group	22 Emergency Lights
Family	Universal LED Emergency Kit
Order Code	89005/EME
Material	Plastic
Shape	Rectangular
Length	150mm
Width	54mm
Height	30mm
Indoor	Yes

Electrical Characteristics

Gear

Gear Type	Emergency Kit
Power(Watts)	5-50W
Output	320mA-40mA
Voltage Range	8-60V
IP Rating	IP20
Safety Class	
Dimmable	N/A
Operating Temp	55°C
Housing Material	Plastic
Output Terminal	Connector
Brand	One Light Ltd
Battery Capacity	4000mAh
Battery Voltage	3,6V
Operation Time	3 hours
Charging Time	24 hours
Maintained	Yes
Non Maintained	Yes

Packing Info

Box Length	22,5cm
Box Width	5cm
Box Height	10,6cm
Box Weight	0.691kg
Pcs/Carton	12
Carton Length	33cm
Carton Width	25cm
Carton Height	26cm
Carton Weight	8,1Kg
Barcode	5291889040972
HS Code	8504408290

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

