



13 Wall & Ceiling LED>Outdoor Slim Oval Range Up & down beam

67378/AN/W



2x3W LED wall light, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



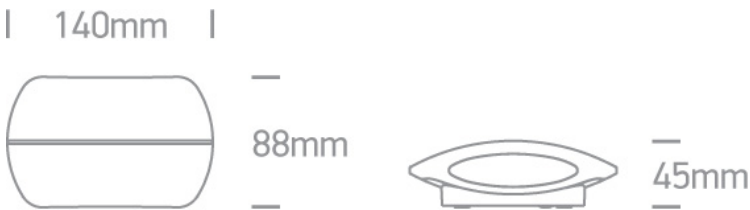

Dimensions



Physical Specification


Item Group	13 Wall & Ceiling LED
Family	Outdoor Slim Oval Range Up & down beam
Order Code	67378/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	140mm
Width	88mm
Height	45mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x3W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	16V
Power(Watts)	5,6W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 5630
LED Brand	Edison

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,9-6,1W
Power Factor	0,5

Constant Current
350mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand

Yes
8,5-17,5V
IP20

No
50°C
75°C
Plastic
Cable
Eaglerise

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram

3000K
2x210lm
70lm/W
80


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

9,5cm
5,2cm
15cm
0.429kg
24
5291889043676
9405409900

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

